

3 SERIES ELECTRIC COOKTOPS

Viking 3 Series - RVEC

FEATURES AND FUNCTIONS

• Wide variety of surface element sizes and wattages

■ ELECTRIC 30" WIDE COOKTOP

- Left front 8-1/2", 2,000-watt dual element
- Left rear 6-1/2", 1,200-watt single element
- Center 12", 3,200-watt triple element
- Right front 8-1/2", 2,000-watt dual element
- Right rear 6-1/2", 1,200-watt single element

■ ELECTRIC 36" WIDE COOKTOP

- Left front 8-1/2", 2,000-watt dual element
- Left rear 6-1/2", 1,200-watt single element
- Center 12", 3,200-watt triple element
- Right front 8-1/2", 2,000-watt dual element
- Right rear 6-1/2", 1,200-watt single element

■ ELECTRIC 36"WIDE COOKTOP

- Left front 8-1/2", 2,000-watt dual element
- Left rear 6-1/2", 1,200-watt single element
- Left center 12", 3,200-watt triple element
- Right center 8-1/2", 2,000-watt dual element
- Right front 8-1/2", 2,000-watt dual element
- Right rear 6-1/2", 1,200-watt single element
- QuickCook™ Surface Elements utilize ribbon technology to reach full power in about three seconds
- High infrared transmission for fast cooking, regardless of the type of cookware used

EASY OPERATION AND CLEANUP

- Strong, wear-resistant glass ceramic surface with stainless steel frame offers excellent cleanability
- Durable metal die-cast knobs with child-proof, push-to-turn safety feature
- Customer-removable knobs for easy cleaning
- Overall/burner box dimensions designed to fit the majority of similarly sized cooktop cutouts



30" WIDE ELECTRIC COOKTOP



36" WIDE ELECTRIC COOKTOP



45" WIDE ELECTRIC COOKTOP

MODEL NUMBERS

- RVEC3305B 30"W. Electric Cooktop; five burners
- RVEC3365B 36"W. Electric Cooktop; five burners
- RVEC3456B 45"W. Electric Cooktop; six burners

COLOR FINISHES

Available in Stainless Steel (SS)

WARRANTY

- 2-year full complete product
- 90-day full cosmetic parts such as glass, painted items and decorative items
- 5-year limited surface burners




3 SERIES ELECTRIC COOKTOPS

Viking 3 Series – RVEC

0823

ELECTRIC COOKTOPS			
DESCRIPTION	RVEC3305B	RVEC3365B	RVEC3456B
Overall Width	30-3/4" (78.1 cm)	36-3/4" (93.3 cm)	45" (114.3 cm)
Overall Height	4-1/2" (11.4 cm)		
Overall Depth	21" (53.3 cm)		
Cutout Width	28-7/8" (73.3 cm) minimum 29-7/8" (75.9 cm) maximum	34-7/8" (88.6 cm) minimum 35-7/8" (91.1 cm) maximum	43-1/8" (109.5 cm) minimum 44-1/8" (112.1 cm) maximum
Cutout Height	3-1/8" (7.9 cm)		
Cutout Depth with Conduit	4-1/8" (10.5 cm)		
Cutout Depth	20" (50.8 cm) minimum; 20-1/4" (51.4 cm) maximum		
Electrical Requirements	240-208/120VAC/60Hz; factory-installed, agency-approved 4 ft. (121.9 cm) flexible steel conduit 3-wire with ground included; rated 60-amp 125-250VAC minimum		
Maximum Amp Usage	240V – 40.0 amps 208V – 34.6 amps		240V – 48.3 amps 208V – 41.9 amps
Surface Element Rating	Left Front – 2,000 watts Left Rear – 1,200 watts Center – 3,200 watts Right Front – 2,000 watts Right Rear – 1,200 watts	Left Front – 2,000 watts Left Rear – 1,200 watts Center – 3,200 watts Right Front – 2,000 watts Right Rear – 1,200 watts	Left Front – 2,000 watts Left Rear – 1,200 watts Left Center – 3,200 watts Right Center – 2,000 watts Right Front – 2,000 watts Right Rear – 1,200 watts
Approximate Shipping Weight	52 lb. (23.4 kg)	60 lb. (27.0 kg)	71 lb. (32.0 kg)

Please do not prepare installation from brochure data only. See installation instructions for important clearance/installation information.

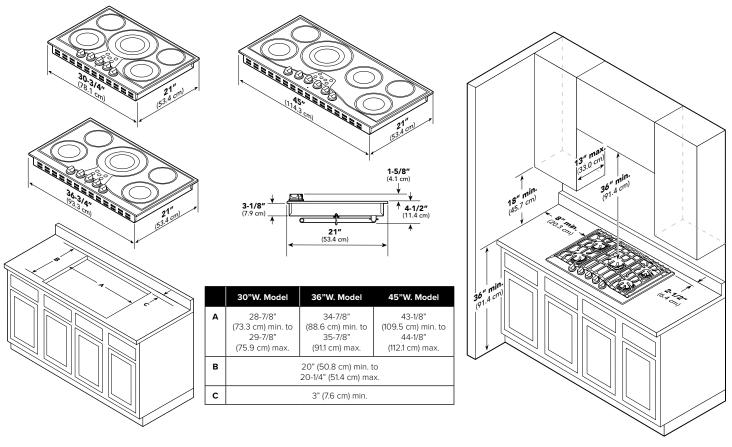

VIKING

VIKING RANGE, LLC 111 FRONT STREET GREENWOOD, MISSISSIPPI 38930 USA

For detailed product information, model numbers, or to request a quote call 1-888-845-4641 or visit vikingrange.com © 2023 Viking Range, LLC All rights reserved. Specifications subject to change without notice.

F60260A