ESSENTIALS




BREEZE II

For superior value in a quiet, high-performance package, Breeze II comes equipped with upgraded three-speed, 400-cfm blowers, convenient dishwasher-safe aluminum filters and a timed delay-off feature to automatically clear the air and power down after five minutes. Sleek, integrated controls simplify cleanup, and the two-level incandescent bulbs or optional halogens let you set a low-key mood when the time is right.







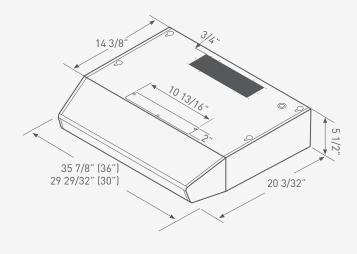

В

BREEZE II		
MODEL	AK1200	AK1236
SIZE	30"	36"
NET WIDTH	29-29/32"	35-7/8"
PERFORMANCE Internal Blower Internal Blower Sones	400 CFM 4.5	400 CFM 4.5
COLOR Black, Bisque, White, Stainless Steel	B, Q, W, SS	B, Q, W, SS
FEATURES Controls Speed Levels Auto Delay-Off Lighting Dual-Level Lighting Filters Recirculating Duct Cover Extension	Electronic Touch 3 Yes Incandescent, 40W x 2 Yes Metal Mesh x 2 Yes NA	Electronic Touch 3 Yes Incandescent, 40W x 2 Yes Metal Mesh x 2 Yes NA
DUCT SPECIFICATIONS Internal Blower - Vertical Internal Blower - Horizontal	3-1/4" x 10" 3-1/4" x 10"	3-1/4" x 10" 3-1/4" x 10"
AC INPUT	120V - 60Hz	120V - 60Hz
AC POWER	Max. 167W, 1.5 Amps	Max. 167W, 1.5 Amps
OPTIONAL ACCESSORIES Recirculating Kit Halogen Bulb, 35W	OAK11-21001 ZOB-0001	OAK11-21001 ZOB-0001
Mounting Heights	Min. height 24" from cooking surface. Hood mounted 60" from floor.	Max. height 32" from cooking surface. Hood mounted 68" from floor.



