


	INTERNAL BLOWER STANDARD	INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™*		
SINGLE BLOWER (INCLUDED) <b>Min. - Max. CFM</b>	200 - 750	200 - 590	200 - 390	200 - 290
SINGLE BLOWER (INCLUDED) <b>Min. - Max. Sones</b>	0.5 - 7	*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.		
DUAL BLOWER (OPTIONAL) <b>Min. - Max. CFM</b>	350 - 1,300			
DUAL BLOWER (OPTIONAL) <b>Min. - Max. Sones</b>	1 - 8			




**ACT™** **POWERWAVE™**




Includes Wireless Remote Control

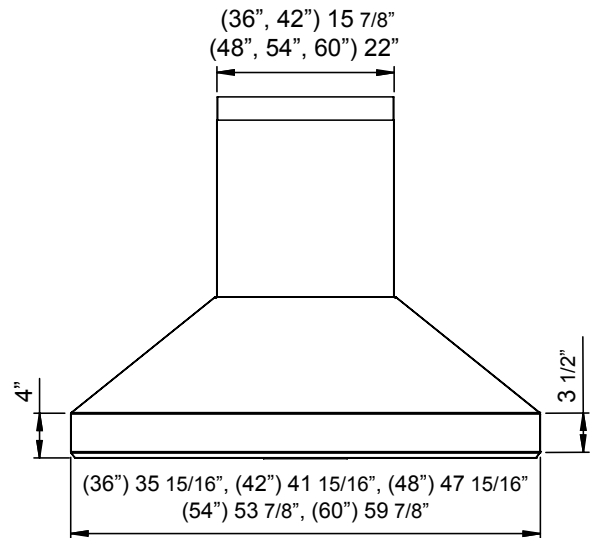

FRONT

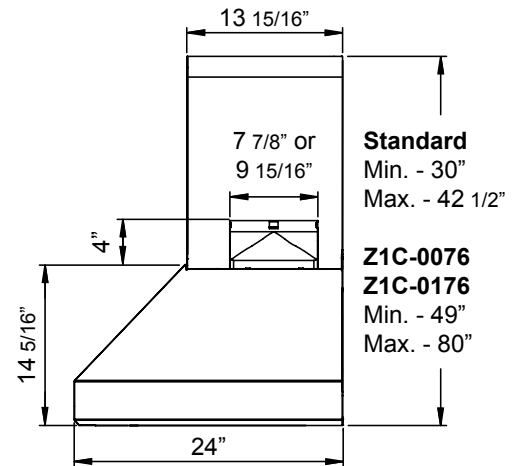

SIDE

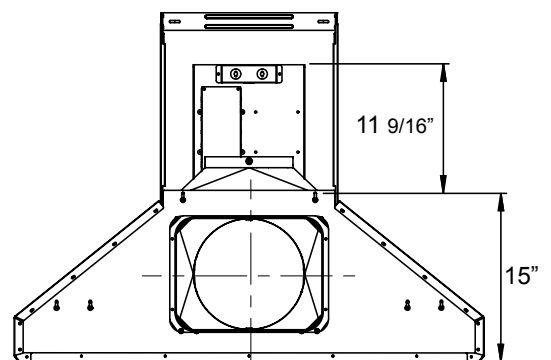

BACK

**Standard**  
Min. - 30"  
Max. - 42 1/2"

**Z1C-0076**  
**Z1C-0176**  
Min. - 49"  
Max. - 80"

## MODEL

Stainless Steel Size	AK7636BS/AK7642BS 36"/42"	AK7648BS/AK7654BS/AK7660BS 48"/54"/60"
----------------------	------------------------------	---

## BLOWER PERFORMANCE

Included Single Blower	200-750 CFM, 0.5-7 Sones	200-750 CFM, 0.5-7 Sones
ACT 590 CFM (Min. - Max.)*	200-590 CFM	200-590 CFM
ACT 390 CFM (Min. - Max.)*	200-390 CFM	200-390 CFM
ACT 290 CFM (Min. - Max.)*	200-290 CFM	200-290 CFM
Optional Dual Blower	350-1,300 CFM, 1-8 Sones	350-1,300 CFM, 1-8 Sones

## FEATURES

ACT™ Technology	590, 390, 290, Single Blower Only	590, 390, 290, Single Blower Only
Controls	Electronic LCD	Electronic LCD
Speed Levels	6**	6**
Auto Delay-Off	Yes	Yes
CleanAir Function	Yes	Yes
Directional Lighting	LumiLight LED, 6W x2	LumiLight LED, 6W x4
Dual-Level Lighting	Yes	Yes
Filters	Pro Baffle x2	Pro Baffle x3
Grease Collection Tray	Yes	Yes
Wireless Remote Control	Yes, Optional	Yes, Optional
Recirculating Option	No	No
Duct Cover Extension Option	Yes	Yes
ADA Compliant	Yes (w/ remote accessory)	Yes (w/ remote accessory)

## DUCT SPECIFICATIONS

Vertical Single Internal Blower	8" Round	8" Round
Horizontal Single Internal Blower	8" Round	8" Round
Vertical Dual Internal Blower	10" Round	10" Round
Horizontal Dual Internal Blower	10" Round	10" Round

AC POWER (Single Blower)	120V, 60Hz at Max. 5A	120V, 60Hz at Max. 5A
AC POWER (Dual Blower)	120V, 60Hz at Max. 8A	120V, 60Hz at Max. 8A

## OPTIONAL ACCESSORIES

Wireless Remote Control	14000005	14000005
Dual Internal Blower	PBD-1300B	PBD-1300B
Duct Cover Extension	Z1C-0076	Z1C-0176
Stainless Steel Telescopic Backsplash	AK1716/AK1712	AK1718/AK1714
Make-Up Air Kit (Single Blower)	MUA008A	MUA008A
Make-Up Air Kit (Dual Blower)	MUA010A	MUA010A

MOUNTING HEIGHT RANGE***	24" - 36"	24" - 36"
--------------------------	-----------	-----------

## WARRANTY

3 years parts, 1 year labor      3 years parts, 1 year labor

CEILING HEIGHT		8'	8.5'	9'	9.5'	10'	10.5'	11'	12'
STANDARD DUCT COVER	Ducted Mounting Height***	24" - 30.5"	24" - 36"	29.5" - 36"	35.5" - 36"	NA	NA	NA	NA
	Duct Cover Extension	NA	NA	NA	24" - 29.5"	24" - 35.5"	24" - 36"	24" - 36"	27.5" - 36"

\*ACT™ only available with single internal blower.

\*\*When ACT™ is enabled the number of fan speeds will be reduced to maximum 3 speeds.

\*\*\*Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.

**ACT™**

**Airflow Control Technology™ (ACT™)**

is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

**PowerWave™**

**PowerWave™ 3-Phase Blower Technology**

delivers best-in-class performance with unparalleled quiet operation. It provides more power while minimizing noise and improving efficiency.

Specifications subject to change, check zephyronline.com for up-to-date information.  
Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

APR22.0101

