

MONSOON DCBL one-piece-liner

Monsoon DCBL is one-of-a-kind. We started with a 715 CFM DC motor and added stainless steel baffle filters with a removable grease tray for easy cleaning. Then we introduced vertical and horizontal ducting to insert liner range hoods. We went beyond the expected by also equipping Monsoon DCBL with a wireless remote control, and finally, we challenged all conventional notions of performance by adding the proprietary DCBL Suppression System™ that makes Monsoon DCBL the most quiet and energy efficient insert liner available today. Never has an insert liner range hood been so technologically advanced.

MODEL	SIZE	INTERNAL BLOWER		IN-LINE/EXTERNAL	
		Min.-Max. CFM	Min.-Max. Sones	Min.-Max. CFM	Min.-Max. Sones
AK9434AS (36")	34-3/8"	250 - 715	0.8 - 5.8	NA	NA
AK9440AS (42")	40-3/8"	250 - 715	0.8 - 5.8	NA	NA



RF REMOTE CONTROL


DCBL^e
SUPPRESSION SYSTEM™

All Next Generation Europa range hoods are equipped with DCBL Suppression™ technology, including Bloom™ HD LED light bulbs. To learn more, visit us at zephyronline.com.




MONSOON DCBL | ONE-PIECE-LINER


SIZE (W X D)	
AK9434AS (36")	34-3/8" x 22-1/2"
AK9440AS (42")	40-3/8" x 22-1/2"
PERFORMANCE	
INTERNAL, MIN.-MAX. BLOWER CFM	250 - 715
INTERNAL, MIN.-MAX. SONES	0.8 - 5.8
COLOR	
STAINLESS STEEL	SS
FEATURES	
CONTROLS	ELECTRONIC LCD
SPEED LEVELS	5 + BURST
AUTO DELAY-OFF	YES
CLEAN AIR MODE	YES
LIGHTING	
AK9434AS	BLOOM™ LED, 6W x2
AK9440AS	BLOOM™ LED, 6W x3
DUAL LEVEL LIGHTING	YES
FILTERS	SS PRO-BAFFLE
REMOVABLE GREASE TRAY	YES
RF REMOTE CONTROL	YES
RECIRCULATING OPTION	NO
DUCT SPECIFICATIONS	
INTERNAL BLOWER - VERTICAL	8" ROUND
INTERNAL BLOWER - HORIZONTAL	3-1/4" x 10" RECTANGULAR, 8" ROUND
AC INPUT	120V
AC POWER	
AK9434AS	MAX. 219W AT 3.5A
AK9440AS	MAX. 225W AT 3.6A
MOUNTING HEIGHT*	26" - 36"
WARRANTY	3 YEARS PARTS, 1 YEAR LABOR

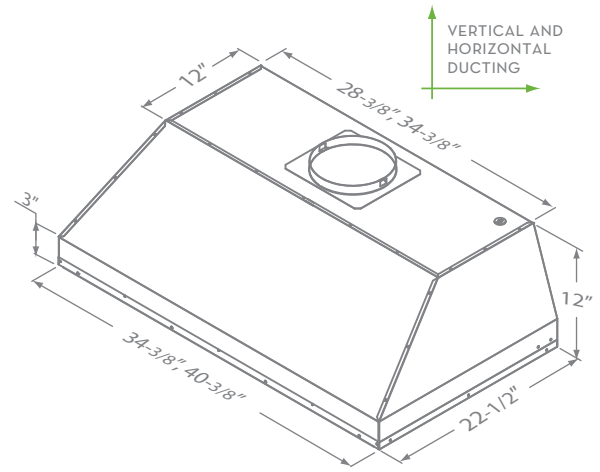

FRONT

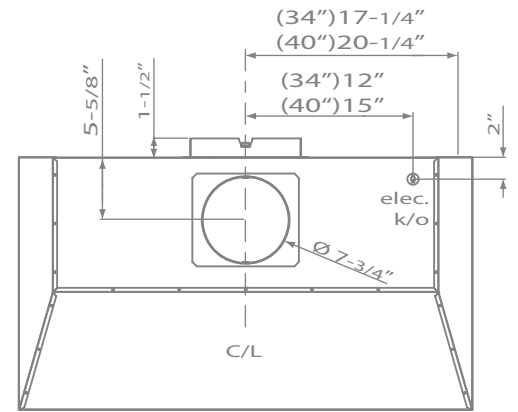

TOP

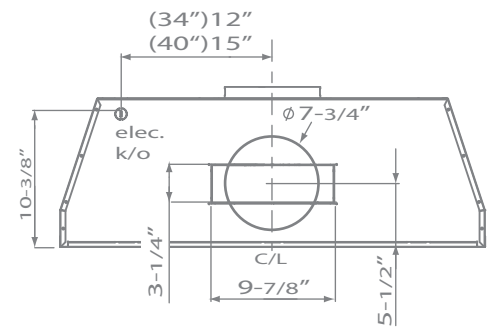

BACK

*MOUNTING HEIGHT REFERS TO DISTANCE BETWEEN TOP OF A 36" TALL COOKING SURFACE AND BOTTOM OF CUSTOM HOOD.



RF REMOTE CONTROL

← **ADA**
COMPLIANT

← **UL** US LISTED