OKFANITO


WALL

DESIGNER: FU-TUNG CHENG The perfect marriage of vision, whimsy and discipline, the Okeanito never goes unnoticed. The graceful, sweeping hood balances softness and fluidity with cool linear elements to create a timeless design. Perforated side panels

allow the Okeanito to radiate gentle ambient light, infusing its surroundings with a sense of grace and calm. Now featuring the most advanced Bloom™ HD LED light bulbs and an optional wireless RF remote control.











Optional Wireless Remote Control

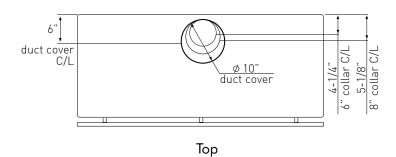



WALL

DESIGNER: FU-TUNG CHENG



MODEL												
Stainless Steel Size		COK-E36BSX 36"			COK-E42BSX 42"			COK-E48BSX 48"				
J126		42 40										
PERFORMANCE												
Internal Blower (CBI-290A)*		200-290 CFM, 1.4-3 sones		es 200-2	200-290 CFM, 1.4-3 sones			200-290 CFM, 1.4-3 sones				
Internal Blower (CBI-600A)*		240-600 CI	FM, 1.8-6 son	es 240-6	240-600 CFM, 1.8-6 sones			240-600 CFM, 1.8-6 sones				
In-Line Blower (PBN-1000A)*		500-1,000	CFM, sones N	IA 500-1	500-1,000 CFM, sones NA			500-1,000 CFM, sones NA				
External Blower (CBE-1000)*		500-1,000	CFM, sones N	IA 500-1	500-1,000 CFM, sones NA			-1,000 CFM	, sones NA			
FEATURES												
Controls			ouch Controls		Electronic Touch Controls			tronic Touch	Controls			
Speed Levels		3			3			3				
Auto Delay-Off		Yes	\		Yes			Yes				
Lighting Ambient Lighting		Incandescer) LED, 6W x2		Bloom™ HD LED, 6W x2 Incandescent, 40W x2			Bloom™ HD LED, 6W x4 Incandescent, 40W x4				
Dual-Level Lighting		Yes, Bloom			Yes, Bloom™ HD LED			rincanaescent, 40w x4 Yes, Bloom™ HD LED				
Filters		Professional		•	Professional Baffle			essional Baf				
Wireless Remote Control Option		Yes, RF		Yes, RI	Yes, RF			RF				
Recirculating Option		No		No	No							
Extension Duct Cover		Yes, Up to 1			Yes, Up to 12' Ceiling			Yes, Up to 12' Ceiling				
ADA Compliant		Yes (with remote accessory)		y) Yes (w	Yes (with remote accessory)			(with remote	accessory)			
DUCT SPECIFICA												
Vertical - Internal Blower		6" Round			6" Round			6" Round				
Vertical - External/In-Line Blower		10" - 8"**			10" - 8"**			10" - 8"** NA				
Horizontal		NA		NA	NA							
AC POWER												
Hood w/ CBI-290A		120V 60Hz	, Max. 1.35A	120V	120V, 60Hz, Max. 1.35A			V, 60Hz, Ma	x 1.45A			
Hood w/ CBI-600A			, Max. 3.35A		120V, 60Hz, Max. 3.35A			120V, 60Hz, Max. 3.45A				
Hood w/ PBN-1000A			, Max. 6.05A		120V, 60Hz, Max. 6.05A			120V, 60Hz, Max. 6.15A				
Hood w/ CBE-1000			, Max. 6.85A		120V, 60Hz, Max. 6.85A			120V, 60Hz, Max. 6.95A				
OPTIONAL ACC	ESSORIES											
Extension Duct Cover		Z1C-00OK			Z1C-00OK			Z1C-00OK				
Make-Up Air Kit		MUA006A (600 CFM)	MUA0	MUA006A (600 CFM)			MUA006A (600 CFM)				
Wireless Remote Control		MUA008A (1,000CFM) 14000005			MUA008A (1,000CFM) 14000005			MUA008A (1,000CFM) 14000005				
MOUNTING HEIGHT RANGE*** 26		26" - 36"		26" - 3	26" - 36"			26" - 36"				
WARRANTY		3 years part	ts, 1 year labo	or 3 year	s parts, 1 year	labor	3 уе	ars parts, 1	year labor			
CEILING HEIGHT			8′	8.5′	9′	9.5′		10'	10.5′	11'	12'	
STANDARD DUCT COVER	Ducted Mounting Height*** 2		26" - 30"	26" - 36"	26" - 36"	26" - 36	6"	32" - 36"	NA	NA	NA	
EXTENSION DUCT COVER	Ducted Mounting Height***		NA	NA	26" - 28"	26" - 34	4"	26" - 36"	26" - 36"	26" - 36"	30" - 36"	
*DI II .I			•	•	-	_				•	•	



^{*}Blower sold separately.

**10" round duct connects to external and in-line blower. Must transition from 10" to 8" before duct passes through ceiling. A 10" to 8" adapter is included with external and in-line blowers.

***Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.