

48" PRO-STYLE® GAS RANGE JGRP548WP, JLRP548WP - 47%" x 38¾" x 29¼"

PRODUCT DIMENSIONS

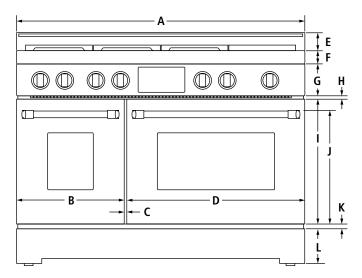

FRONT VIEW

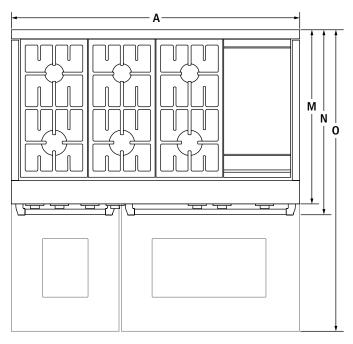


JGRP548WP DEL # JLRP548WP		
	in	cm
4	1 7 7/8	121.6
door 1	75/8	44.6
	3/4	1.8
2	29%	75.2
splash	3	7.6
	21/4	5.5
!	5¾	13.5
	7/8	2.0
2	203/4	52.5
1	93//8	49.0
lower panel	1	2.5
!	5½	14.0
overhang 2	273/8	69.5
2	291/4	74.2
en 4	15¾	116.2
	door 1 splash 2 splash 2 lower panel overhang 2	JLRP54 in 471/8 door 175/8 3/4 295/8 splash 3 21/4 53/6 7/8 203/4 193/8 lower panel 1 51/2 overhang 273/8 291/4

TOP VIEW



48" PRO-STYLE® GAS RANGE JGRP548WP, JLRP548WP - 47%" x 38¾" x 29¼"

DIMENSIONS AS INSTALLED




МОІ	JGRP548WP ODEL # JLRP548WP		
		in	cm
A *	Height to top of grates (min.)	36¾	93.3
В*	Height to top of cooking surface (min.)	35¾	90.8
C *	Height to top of doors (min.)	273/8	69.5
D*	Height to top of handles (min.)	25%	65.7
E*	Height to top of lower panel (min.)	51//8	14.9
F	Depth with doors fully open	45¾	116.2
G	Depth with handles	291/4	74.2
Н	Depth with control panel overhang	273/8	69.5
ı	Depth without control panel	23½	59.5
J	Depth of island trim backsplash	21/4	5.7
K	Depth without doors	245/8	62.5
L	Depth with doors	26¾	68.0
М*	Height to top of island trim backsplash (min.)	38¾	98.4

^{*}Add $1\frac{3}{4}$ " (4.4 cm) to the height dimension when leveling legs are fully extended.



48" PRO-STYLE® GAS RANGE JGRP548WP, JLRP548WP - 47%" x 38¾" x 29¼"

OPENING/CLEARANCE DIMENSIONS

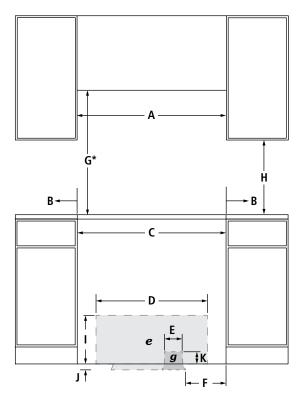


FRONT VIEW

MODE	MODEL #		JGRP548WP JLRP548WP	
		in	cm	
Α	Width of combustible area above cooking surface (min.)	48	121.9	
В	Width from range to fixed wall or other combustible material (min.)	6	15.2	
С	Width of opening (min.)	481/4	122.6	
D	Width of electrical installation area	40	101.6	
E	Width of gas installation area	24	61.0	
F	Width from side cabinet to gas installation area	6	15.2	
G*	Height to bottom of uncovered wood or metal cabinet above cooking surface (min.)	42	106.7	
Н	Height to bottom of uncovered wood or metal cabinet (min.)	18	45.7	
ı	Height of electrical installation area	15	38.1	
J	Depth of electrical and gas installation area	5	12.7	
K	Height of gas installation area	3	7.6	
L	Depth of upper cabinet (max.)	13	33.0	
M**	Depth to wall (min.)	6	15.2	
N	Width to electrical conduit	91/8	23.0	
0	Width to gas inlet	143/8	36.5	
e	Recommended electrical access location			
g	Recommended gas supply line location			


^{*}If installing a hood or hood liner above the range, follow the hood or hood liner instructions for dimensional clearances above the cooking surface.

ELECTRICAL REQUIREMENTS

120 volt, 60 Hz, AC only, 15 -amp fused, grounded circuit is required. A dedicated circuit is recommended.



Side



IMPORTANT: Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to the Installation Guide *before* selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.



^{**}If back wall is constructed of a combustible material and a backsplash is not installed, a 6" (15.2 cm) minimum clearance is required.