

refrigeration

Retail Sales

March 2005 new product introductions



imagination at work

Contents



3 Built-in refrigerators

71 Specifications & installation



13 CustomStyle[™] refrigerators72 Specifications & installation



23 Side-by-side refrigerators76 Specifications & installation



41 Bottom-freezer refrigerators80 Specifications & installation



57 Top-freezer refrigerators82 Specifications & installation

built-ins

New product introductions 2005 GE Profile™ built-in side-by-side refrigerators





Built-in side-by-side quick pitch

The convenience you need, the built-in look you want.



Integrated Appearance

Enjoy a **true, built-in appearance** that blends into the décor, or **marries with fine cabinetry when finished with** 1/4" or 3/4" panels.



Exceptional Food Preservation

Overhead evaporator system isolates the airflow between the freezer and the fresh food section to keep frozen foods frozen and fresh foods fresh.



Ultimate Convenience

Secure-close door system is engineered to automatically pull the door shut when angled at 90 degrees or less.



Feature gallery: Built-in refrigerators



ClimateKeeper™ system 、

Combines electronics and a multiflow air system to keep temperatures consistent and help preserve foods.



Digital temperature controls

Provides easy-access and controls compartment temperatures with electronic accuracy.



Soft-touch dispenser 🔍

Includes a child lock and door alarm, filter replacement indicator light and Quick Ice™ system.



Spillproof glass shelves _____

Contains spills to keep cleanup to a minimum.



Secure-Close door system Automatically pulls the door shut when angled at 90 degrees or less.

GE Profile[™] model PSB42LGR

0



- SmartWater™ Plus filtration

Ensures better-tasting water and ice. Has a filter change indicator light and simple-toinstall Twist and Lock design.

Adjustable humidity vegetable/fruit crispers

Customizes the storage environment to keep produce fresh.

Snack drawer

=

=

Provides convenient access to cheeses and deli meats.





ClearLook™ door bins

Holds beverages and condiments in a stylish and secure place.



The inside story: Built-in refrigerators



Overhead evaporator system 🔍

Reduces defrosting and eliminates shared air to protect food and ice quality.



Icemaker with Quick Ice[™] system – Creates ice 50% faster.



Freezer baskets

Deeper design offers easy access and more storage flexibility.



Deluxe quiet design

Significantly reduces operating noise.



ENERGY STAR®qualified

Reduces energy usage below federal energy standards by 15% or more to help lower utility bills.



GE Profile[™] model PSB42LSR

Design options

Make an impressive design statement without standing out. Select a built-in refrigerator, and then simply slide into place custom panels that reflect style and personality. Choose a trimless stainless steel refrigerator for a great look. Add acrylic panels for a contemporary look, or rich wood panels that match cabinets for a truly custom appearance.



PSB42LSRBV PSB48LSRBV Stainless steel with full-length visor handles



PSB42LGRBV PSB48LGRBV Black dispenser model shown with optional black acrylic panels



PSB42LGRWV PSB48LGRWV White dispenser model shown with optional white acrylic panels



PSB42LGRWV PSB48LGRWV White dispenser model shown with optional 1/4" custom wood panels



PSB42LGRBV PSB48LGRBV Black dispenser model shown with optional 1/4" custom wood panels



PSB42LGRWV PSB48LGRWV White dispenser model shown with optional 3/4" custom wood panels



PSB42LGRBV PSB48LGRBV Black dispenser model shown with optional 3/4" custom wood panels

Acrylic panels

_	Model number	Black acrylic panels	White acrylic panels
	PSB42LGRWV		PSPK42DWW
	PSB42LGRBV	PSPK42DBB	
	PSB48LGRWV		PSPK48DWW
	PSB48LGRBV	PSPK48DBB	



Food preservation and temperature management

- The GE ClimateKeeper[™] system features an overhead evaporator that frees up space for frozen food and uses sensors to reduce defrosting
- New evaporator design protects foods from odors by eliminating shared air between the fresh food and freezer compartments
- Digital temperature controls are located on the water and ice dispenser for instant adjustments

Innovative control system protects food better and provides extra convenience

	Sensors	Digital control	Overhead evaporator
GE Profile [™]	5	Yes-exterior	Yes
KitchenAid	4	Yes—interior	No, wastes freezer space



External dispenser and controls

- Soft-touch dispenser features a child lock and door alarm for added safety, along with an indicator light that signals when to change the water filter
- Quick Ice™ system creates ice 50% faster than conventional icemakers
- Thermostats for the freezer and fresh food compartments are controlled from the water dispenser, eliminating the need to open the doors

New electronic water-and-ice dispenser adds an extra level of control at your fingertips

Competitive comparison

	Dispensing system	Quick Ice	Digital temperature display	Filter
GE Profile [™]	Soft Touch	Yes	Yes	Yes—500 gallon
	2 paddles with			Yes—inside with % used
KitchenAid	chrome letters and trim	No	Yes—inside	indicator (400 gallon)

Competitive comparison





Extra-capacity freezer baskets

- Both the upper and lower freezer baskets are deeper than standard baskets
- Large foods, even frozen poultry, fit into the baskets easily

Larger-than-ever baskets provide additional convenience for storing frozen foods

	Width		De	oth	Height	
	Upper basket Lower basket		Upper basket Lower basket		Upper basket Lower bas	
GE Profile [™] 42" models	12"	12"	12-1/2"	12-1/2"	8"	10"
KitchenAid 42" models	11-1/4"	11-1/4"	8-1/2"	8-1/2"	5-1/2"	5-1/2"

BrightSpace[™] interior

Competitive comparison

- Bright interior lighting fully illuminates the interior, making it easier to see what's inside
- Dual-level lighting features brilliant 160-watt lighting in the fresh food compartment

Competitive comparison

	Fresh food	Freezer	Total
GE Profile [™]	160 watts	80 watts	240 watts
KitchenAid	120 watts	80 watts	200 watts

Brilliant, dual-level lighting provides additional illumination

Show and tell





Overhead evaporator system

Show how the flip-up panel provides easy access to the GE SmartWater Plus[™] Twist and Lock filtration and the overhead evaporator system. **Tell** how the overhead evaporator system protects food better and provides extra convenience by:

- -Keeping fruits and vegetables crisp and fresh longer with elevated humidity in the fresh food compartment.
- -Allows more flexibility for storing frozen food, such as large roasts or frozen poultry, by moving the evaporator out from behind the freezer baskets.
- -Featuring a grill panel that glides up and out of the way to eliminate the loss or damage of removable grill parts. 11

GE Profile[™] built-In refrigerators give consumers the convenience they need, the look they want.



Integrated Appearance Enjoy a **true, built-in appearance**

that blends into the décor, or **marries with fine cabinetry** when finished with 1/4" or 3/4" panels.



Exceptional Food Preservation **Overhead evaporator system** isolates the airflow between the freezer and the fresh food section to keep frozen foods frozen and fresh foods fresh.



Ultimate Convenience Secure-close door system is engineered to automatically pull the door shut when angled at 90 degrees or less.

custom style

New product introductions 2005 GE Profile[™] and GE[®] CustomStyle[™] refrigerators



imagination at work

0.0



The ultimate in refrigeration.™

If you want a built-in look, without the built-in expense, GE offers the industry's most comprehensive CustomStyle[™] line up. A GE Profile CustomStyle or GE CustomStyle refrigerator **makes the most of your kitchen space** by blending in almost seamlessly with surrounding cabinetry. It **gives you the style you want** and features you need, without the cost and inconvenience of a kitchen redo. And now, GE Profile CustomStyle is available in 25 cu. ft. as well as 23 cu. ft. For a sleek, **modern appearance**, choose stainless or acrylic panels. Or, achieve a **custom look** with cabinet-matching wood panels. Whatever style you prefer, you'll find a CustomStyle refrigerator that **works beautifully with your décor and budget**.







GE Profile Arctica® and GE CustomStyle™ side-by-side refrigerators

An impressive design statement, without standing out.

For a built-in look, without the built-in expense, here's a fitting solution. A GE Profile CustomStyle™ refrigerator makes the most of your kitchen space by blending in almost seamlessly with surrounding cabinetry. It gives you the style you want and features you need, without the cost and inconvenience of remodeling. For a sleek, modern appearance, choose stainless or acrylic panels. Or, achieve a custom look with cabinet-matching wood panels. Whatever style you prefer, you'll find a CustomStyle refrigerator that works beautifully with your decor and budget.



Trimless side-by-side models



Installation made easy: simply slide in.

Trimless CustomStyle units install by simply sliding into—way into—the space between cabinets. They align with counters, instantly look built-in, with nothing to attach or build. (Available in stainless steel, white, bisque and black.)

Installed-trim side-by-side models

Designed for today's discriminating consumers.

CustomStyle refrigerators with installed trim accept stainless steel or acrylic panels in white, black or bisque, all of which can be ordered from GE. To achieve a custom look, you can order custom

Optional collar trim: adding the final touch.

The optional collar trim is just another way GE lets you integrate our CustomStyle refrigerators into your kitchen decor. Available in

Collar trim

Model no.	Black collar trim	White collar trim	Bisque collar trim	Stainless steel collar trim
PSI23NCR	TRMBISBB	TRMBISWW	TRMBISCC	-
PSI23SCR	-	-	-	TRMBISSS
PSI23MGR	TRMBISBB	TRMBISWW	TRMBISCC	-
PSI23NGR	TRMBISBB	TRMBISWW	TRMBISCC	-
PSI23SGR	-	-	-	TRMBISSS
PSH23PSR	-	-	-	TRMBISSS
PSH23PGR	TRMBISBB	TRMBISWW	TRMBISCC	-
PSH25MSS	-	-	-	TRM25BISSS
PSH25NGS	TRM25BISBB	TRM25BISWW	TRM25BISCC	-
PSH25SGS	-	-	-	TRM25BISSS
PSH25MGS	TRM25BISBB	TRM25BISWW	TRM25BISCC	-
PSH25PSS	-	-	-	TRM25BISSS

Custom wood panels Make and install your own custom wood panels to

panels from your cabinetmaker. You'll discover all kinds of ways

stainless steel, white, bisque and black, this trim frames the refrigerator

facade, adding to the finished look of a built-in, custom kitchen.

Acrylic and stainless steel panels

accent cabinetry.

to enhance your kitchen.

Model no.	Black acrylic panels	panels	panels	Stainless steel panels
PSI23NCR	PSPK23CBB	PSPK23CWW	PSPK23CCC	-
PSI23MGR	PSPK23DBB	PSPK23DWW	PSPK23DCC	PSPK23DSS
PSI23NGR	PSPK23DBB	PSPK23DWW	PSPK23DCC	PSPK23DSS
PSH23PGR	PSPK23DBB	PSPK23DWW	PSPK23DCC	PSPK23DSS
PSH25NGS	PSPK25DBB	PSPK25DWW	PSPK25DCC	PSPK25DSS
PSH25MGS	PSPK25DBB	PSPK25DWW	PSPK25DCC	PSPK25DSS



CustomStyle[™] selection

Installed-trim side-by-side models

Dispenser models



PSH23PGS Shown with optional black acrylic panels. Available in white, bisque or black.

This model is ENERGY STAR®-qualified.



PSI23NGR Shown with custom wood panels. Available in white, bisque or black.



PSH25NGS/PSH25MGS Shown with custom wood panels. Available in black.

These models are ENERGY STAR-qualified.





PSI23NCR Shown with optional white acrylic panels. Available in white, bisque or black.



PSI23MGR

Shown with optional

white acrylic panels. Available in white,

bisque or black.

PSI23NCR Shown with custom wood panels. Available in white, bisque or black.



PSI23MGR Shown with custom wood panels. Available in white, bisque or black.

Trimless side-by-side models

Dispenser models



PSW23PSS Stainless-wrapped with sculptured stainless steel handles.

This model is ENERGY STAR-qualified.



PCF25PGS High gloss with sculptured handles. Available in white or black.

This model is ENERGY STAR-qualified.



PSC23SGR Stainless steel with sculptured stainless steel handles.



PSC25MGS Available in white or black. PSC25NGS Available in black.

These models are ENERGY STAR-qualified.



GSC23LGR Available in white or black.



GSC22KGR Available in white or black.





PSC23SHR Stainless steel with sculptured stainless steel handles.



PSC23NHS Available in white or black.



PSC25PSS Stainless steel with sculptured stainless steel handles.

This model is ENERGY STAR-qualified.



PSC23PSS Stainless steel with sculptured stainless steel handles.

This model is ENERGY STAR-qualified.



PSC25SGS/PSC25MSS Stainless steel with sculptured stainless steel handles.

These models are ENERGY STAR-qualified.



PSC23NGS/PSC23MGS Available in white, bisque or black.



Stainless steel with full-length visor handles.

These models are ENERGY STAR-qualified.



PSH23PSS/PSI23SGR Stainless steel with full-length visor handles.

Model PSH23PSS is ENERGY STAR-qualified.



PSH25MSS Stainless steel with full-length visor handles.

This model is ENERGY STAR-qualified.



GSC23LSR Stainless steel with tubular handles.

andles. tubula

Non-dispenser model



PSI23SCR Stainless steel with full-length visor handles.

25 cu. ft. CustomStyle[™] refrigerators



The new 25 cu. ft. CustomStyle GE Profile[™] side-by-side refrigerator offers more capacity than competitors' comparablysized models. Now there are more ways to set your kitchen apart without standing out: the 22 cu. ft. CustomSyle, the 23 cu. ft. CustomStyle, and now, the 25 cu. ft. CustomStyle. Installed alongside counters or between cabinets, these refrigerators offer a look that enhances your décor and saves valuable floor space.

ge.com

Feature gallery: 25 cu. ft. Profile CustomStyle side-by-sides



PSC25PSS shown



Are precise and easy to use, taking the guesswork out of setting accurate temperatures.

ClimateKeeper2[™] system

Keeps foods garden fresh longer, while protecting ice from odor transfer, with its unique dual evaporator system.

Beverage center

Keeps beverages and treats icy cold and easily accessible.

ClearLook™ adjustable gallon door bins

Provides maximum storage flexibility.

ENERGY STAR®qualified

Higher energy efficiency means lower utility bills.













Tall LightTouch! dispenser with LED lighting

Dispenser water and ice at the slightest touch. LED lighting provides long-lasting illumination without generating heat.




Integrated Ice[™] system

The ice bucket is integrated into the icemaker, not the freezer door, freeing up valuable storage space. Tilt-down feature provides easy access to cubed ice.



Answers that click!

GE puts everything you need at your fingertips.

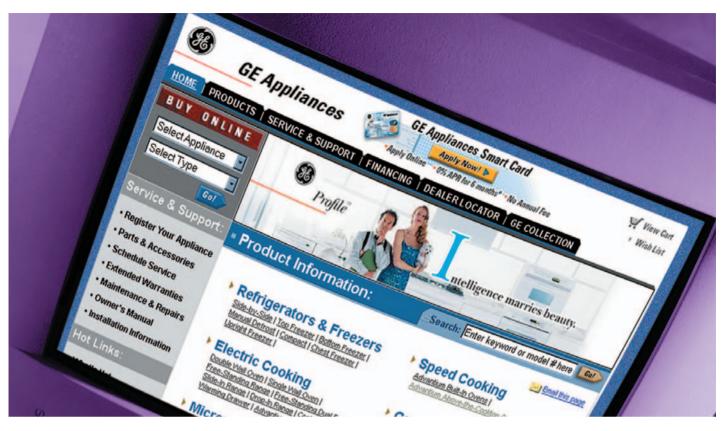

GE Appliances web site — 16 million visitors a year! Visit us at ge.com

Everything you need to know about GE products is here. Access up-to-date information, find out "what's new," obtain dimensions, get installation tips and more. Extremely user-friendly, this one-stop site lets you research by brand, category or model number and even buy online through a local GE dealer.

GE Answer Center[®] saves you time. 800.626.2000

This 24-hour-a-day, 7-day-a-week service provides answers on product features, installation, service and more.

side-by-sides

New product introductions 2005 GE Profile™ and GE® side-by-side refrigerators



imagination at work



Side-by-side refrigerators quick pitch

Freshness at every level



Stylish Appearance Gently contoured doors and elegant sculptured handles are designed to complement every kitchen



Exceptional Food Preservation ClimateKeeper2[™] with two evaporators keeps fresh foods garden fresh longer and keeps frozen foods at their best



Ultimate Convenience Beverage Center keeps beverages and treats nicely chilled and ever so easy to reach



What's new: ClimateKeeper2[™] is now available on more models Freshness at every level.

The Industry's Most Advanced Refrigeration

System keeps foods garden fresh longer. And

now that this technology is available on more

models, consumers who want the latest in food

preservation have more choices.

Two-compartment cooling technology

Keeps fresh foods fresh and frozen foods at their best.

Moist air in the fresh food compartment never mixes with dry freezer air, so foods retain their texture, color and flavor.

Longer-lasting freshness means less food wasted.

Recent studies show that American families waste billions of dollars worth of food each year*, The new ClimateKeeper**2** system can go a long way toward reducing wasted food and money.

*Appliance Magazine, November 2003 online survey.




Asparagus after five days—Conventional system Stalks have begun to bend and appear lifeless.



Asparagus after five days—ClimateKeeper2 system Fresh-looking in texture and color, the bright-green stalks stand straight.



Lemons after five days—Conventional system Refrigerated slices shrivel around the edges, drying up and losing flavor.

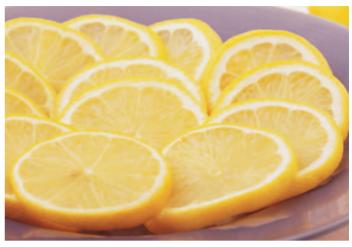

Lemons after five days—ClimateKeeper2 system Still fresh and juicy, slices stay bright, moist and flavorful.



Mushrooms after three days—Conventional system Mushrooms have dried out quickly and developed dark, soft spots,.



Mushrooms after three days—ClimateKeeper2 system Still fresh and firm, mushrooms remain smooth and meaty.



Spinach salad after three days—Conventional system Spinach has curled and lost its crispness, while mushrooms have turned dark and dry.



Spinach salad after three days—ClimateKeeper2 system Crisp greens retain their tenderness, while mushrooms are still white and smooth.

What's new: More of what consumers want

Freshness at every level.

ElMATES SEDER 2

New ClimateKeeper2[™] models

- All CustomStyle[™] 25 cu. ft.
- CustomStyle 23 cu. ft. "P" Series
- Free-standing 26 cu. ft. "P" Series



Beverage Center Convenience

- Beverages, treats and medications are easily accessible and icy cold but never frozen. A built-in control prevents freezing.
- Cans, gallon jugs, bottles and smaller items fit in specially designed racks and bin



Sculptured high gloss handles

- Standard on all new white, black and bisque GE Profile[™]models
- Finger grips on handle backs have a better, more secure feel

LED lighting for dispenser

- Lasts significantly longer than incandescent bulbs
- Burns cool and produces pure light
- Reliable technoloogy endures the shock and vibration of constant door opening and closing. Featured in interior doors of major manufacturers' automobiles.







Latest arrival—25 cu. ft. CustomStyle refrigerators

- Industry's largest built-in style refrigerator
- Taller, not wider, so it still fits the CustomStyle footprint
- Features ClimateKeeper2 technology (all models)
- ENERGY STAR® qualified (all models)
- Available with "M", "N" and "P" series feature packs

Introducing-23 cu. ft. free-standing refrigerators

- Now, GE Profile[™] offers consumers with space limitation more options
- Fits in a 33-inch wide space
- Available with "L", "M" and "N" series feature packs

More great news about GE free-standing refrigerators

- J-Series now offers slide-out spillproof shelves, adjustable humidity, child lock option on the dispenser, and it's ENERGY STAR® qualified
- K-Series offers larger capacity for 23 cu. ft. models, integrated shelf support system, short air tower, new lighting, and it's ENERGY STAR® qualified

Feature gallery: Side-by-side refrigerators



Only GE has it!

SmartWater™ filtration system -

Reduces more impurities. The result is clean, great-tasting water and ice.

Integrated Ice[™] system

The bucket is integrated into the icemaker, freeing up valuable space. Tiltdown feature provides easy access.

QuickSpace[™] shelf

Slides out of the way to make room for tall items.



Tall LightTouch! dispenser with LED lighting

Accommodates tall glassware and dispenses water at the slightest touch. LED lighting lasts longer.



Slide 'n Store™ full-extension freezer baskets

Extends 16" for easy loading and unloading.

GE Profile model PSW23PSR







Only GE has it!

Full-extension bin with CustomCool[™] technology -

Chills in minutes, thaws in hours and helps keep foods fresh, longer.










TurboCool[™] feature

Cools the refrigerator after frequent door openings.



Beverage Center

Keep beverages and treats icy cold and easily accessible.



Adjustable ClearLook™ bins

Hold gallon-size containers with style and ease, freeing up valuable shelf space.

Slide-out, spillproof glass shelves

Simplify loading, unloading and cleaning.





ClimateKeeper**2**™ system

Keeps foods garden fresh longer, while protecting ice from odor transfer, with its unique dualevaporator system.

Available on models:

PSF26PGS	PSC25NGS
PSS26PSS	PSC25SGS
PSW26PSS	PCF25PGS
PSC23PSS	PSC25PSS
PSW23PSS	PSH25MGS
PSH23PGS	PSH25MSS
PSH23PSS	PSH25NGS
PSC25MGS	PSH25SGS
PSC25MSS	PSH25PSS

PSH23P PSC25M PSC25M

The inside story: GE Profile™ side-by-side refrigerators

The ClimateKeeper $2^{\mathbb{T}}$ system uses two evaporators—one for the fresh food compartment and a separate one for the freezer. Creating and maintaining higher humidity for fresh foods helps keep them garden fresh longer. Providing a dry environment for frozen foods keeps them at their best.

ClimateKeeper2 dual-evaporator system

- Maintains humidity in the fresh food compartment to help preserve fresh foods that require more moisture
- Reduces defrost cycles to help keep frozen foods at their best
- Cycles air in the fresh food compartment separately from freezer air, preventing the transfer of food odors

Conventional single-evaporator system

- Allows air and odors to circulate between the fresh food and freezer compartments
- Maintains lower humidity levels than necessary to keep fresh foods at their best
- Allows humidity from the fresh food compartment to transfer to the freezer, causing more frequent defrosting and the increased chance of freezer burn







"Finally, ClimateKeeper**2** brings out the best in foods. It keeps temperature and humidity under control so foods stay fresh longer." —Alton Brown, Host/Writer of Food Network's "Good Eats"









PARTNER OF THE YEAR 2004

FrostGuard[™] technology

Protects frozen items from freezer burn by monitoring door openings and defrosting only when needed.

NeverClean[™] condenser

Encased coils don't require cleaning in normal operating environments.

Deluxe Quiet Design Significantly reduces operating noise.

ENERGY STAR®-qualified

PSW26SGR
PSS26SGR
PSS26NGS
PSW26MSR
PSS26MSR
PSS26MGS
PSS26LSR
PSS26LGS
GSS25SGS
GSS25KGS
GSS23SGS
GSS23KGS
GSH25JSR
GSL25JFR
GSH25JFR
GSH22JSR
GSL22JFR
GSH22JFR

Dare to compare

ClimateKeeper**2**[™] system

- Allows fresh foods to retain the higher moisture levels that keep them at their peak longer
- Fresh foods deteriorate as they lose moisture, becoming dry and unappealing
- Fresh foods last longer at higher relative humidity levels than are produced by single-evaporator systems



Mushrooms after three days with ClimateKeeper2



Mushrooms after three days with conventional system



Tall LightTouch! dispenser— The tallest dispenser in the industry!

- Accommodates cups and containers of all sizes—from pitchers to water bottles
- Dispenses great-tasting filtered water and ice at the slightest touch

Compared to GE's dispenser, competitors' dispensers fall short

Competitive comparison

	GE Profile™	Kenmore	Whirlpool	Frigidaire	Maytag	Amana	KitchenAid	Samsung
Dispenser height	9"	7.75"	7.5"	7"	8.6"	8.5"	7.75	8.5"
Dispenser design	LightTouch!	two-paddle	two-paddle	two-paddle	touchpad	touchpad	two-paddle	touchpad



GE offers the most complete stainless exterior line-up!

Choose options such as stainless wrapped models, stainless trim and true stainless sculptured handles.



Competitive comparison—Appearance

	GE Profile™	Kenmore	Whirlpool	KitchenAid
Full-wrapped stainless	Yes	No	No	No
Stainless trim	Yes	No	No	No
True stainless handles	Yes	No	No	No



GE Profile BrightSpace[™] freezer

Exclusive Integrated Ice™ system

- Icemaker and ice bucket are fully integrated into the freezer cabinet to free up valuable storage space and keep ice from clumping
- Ice bucket pulls out and down, providing easy access
- Unique configuration makes room for three full-extension, slide-out freezer baskets for added storage flexibility







Competitive comparison

	GE Profile™	Kenmore Elite	Whirlpool	Frigidaire	Maytag	Amana	KitchenAid	Samsung
Full-extension slide-out freezer baskets	3	None	None	1	None	None	None	None

More space. More convenience. Easy access.

Show and tell



Lemons after five days with conventional system



Lemons after five days with ClimateKeeper2

ClimateKeeper**2**[™] system

Show your customers how the cold, dry freezer air in a conventional system pulls the moisture out of lemon slices. After five days, the lemon slices lose their luster, appear dry and unappetizing and are ready to be discarded.

Tell your customers how lemon slices retain their freshly cut appearance and are full of flavor after five days in the ClimateKeeper2 system.



ClimateKeeper**2**[™] LCD P.O.P.

Show them the interactive touch screen display, and explain how easy it is to use.

Tell them how we've capitalized on this industryleading technology to demonstrate the benefits of ClimateKeeper2 using Alton Brown as our spokesperson.



Flipbook P.O.P.

Show your customers the interactive flip chart.

Tell them about the benefits of ClimateKeeper2 by pointing out the illustrated food shots. Fresh foods stay fresh while frozen foods stay frozen.

Exclusive CustomCool[™] technology—It chills. It thaws. It preserves!



Show your customers how to select the **ExpressChill**[™] option of 15, 30 or 45 minutes by pressing the electronic CustomCool pad repeatedly.

Tell your customers how quickly this option allows them to chill beverages for game day or wine for unexpected company.



Show your customers how to select the **ExpressThaw**[™] options for thawing 1/2 pound, one pound, two pounds and three pounds of meat by pressing the electronic CustomCool pad.

Tell your customers how they can conveniently thaw frozen meats safely even when they're not home. The meat stays refrigerated until they're ready to cook.



Show your customers how to select the **SelectTemp**[™] options for citrus (43°F), produce (35°F) and meat (31°F) by pressing the electronic CustomCool pad.

Tell your customers how they can protect their favorite foods at the recommended temperature to keep those foods fresh, longer.

Quietest refrigerator guarantee

Show our customers the "quiet guarantee" point-of-purchase piece.

Tell your customers about the 30-day, money-back guarantee. Then, explain the benefits of superior performance and quiet operation:

- Advanced cooling technology not only makes life easier, but it also makes operation quieter and more efficient.
- -Less operating noise means more peace of mind; better efficiency means lower utility bills.





The quietest refrigerator you ever owned...guaranteed!*

There's a GE side-by-side refrigerator for every kitchen.

GE[®] and GE Profile[™] CustomStyle[™]



Full-wrapAvailable in 23 cu. ft. capacity



High gloss

- Available in 25 cu. ft. capacity
- Color options: White, Black



Installed trim

- Available in 23 and 25 cu. ft. capacities
- Color options: White, Bisque, Black



Trimless

- Available in 23 and 25 cu. ft. capacities
- Color options: Stainless steel, White, Bisque, Black



GE CustomStyle

- Available in 22 and 23 cu. ft. capacities
- Color options: Stainless steel, White, Bisque, Black

GE Profile free-standing refrigerators



Full-wrapAvailable in 26 cu. ft. capacity



High gloss

- Available in 26 cu. ft. capacity
- Color options: White, White with stainless accents, Black



Stainless steel

• Available in 23, 26 and 27 cu. ft. capacities



Textured traditional

- Available in 23, 26 and 29 cu. ft. capacities
- Color options: White, Bisque, Black

GE free-standing refrigerators





• Available in 22, 23 and 25 cu. ft. capacities



CleanSteel

• Available in 22, 23 and 25 cu. ft. capacities



Textured traditional

- Available in 20, 22, 23 and 25 cu. ft. capacities
- Color options: White, Bisque, Black

GE Profile[™] and GE[®] side-by-side refrigerators—freshness at every level.



Stylish Appearance Gently contoured doors and elegant sculptured handles are designed to complement every kitchen



Exceptional Food Preservation ClimateKeeper2[™] with two evaporators keeps fresh foods garden fresh longer and keeps frozen foods at their best



Ultimate Convenience Beverage Center keeps beverages and treats nicely chilled and ever so easy to reach.



bottom-freezers

New product introductions 2005 GE Profile[™] and GE[®] bottom-freezer refrigerators



imagination at work



Bottom-freezer refrigerators quick pitch

Freshness at every level



Stylish Appearance

The doors on top are the new french door style with true stainless steel sculptured handles on stainless and stainless-wrap models



Outstanding Food Preservation

Exclusive ClimateKeeper™ system includes a digital temperature readout, electronic sensors and an air tower for precise temperature control and optimal food freshness



Tremendous Storage Convenience Multi-level Slide 'n Store[™] freezer baskets allow easy loading and unloading of frozen foods



What's new: Freshness at every level




HOLD 3 SECS FESET WATER FILTER

GE Profile[™] sculptured stainless handles

- Appealing lines
- Crafted in true stainless steel to complement the door's gentle contours

Upgraded filter with new indicator light

- Filter removes more impurities
- Light reminds you when to change filter
- Reset button reactivates reminder once filter has been replaced
- 750-gallon filter provides one year of filtered water

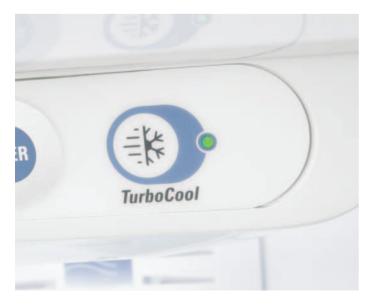

New to bottom-freezer refrigerators: TurboCool

- Quickly cools the refrigerator after frequent door openings or after hot items are placed inside
- "Revs up" the refrigerator when needed to maintain constant cool



Introducing new french door models: Convenience meets fresh food

- Top doors are stylish french doors with true stainless steel sculptured handles on stainless and stainless-wrap models
- Because the doors don't swing as wide as top freezer or traditional bottom freezer refrigerator doors, the french door style is ideal for tight space installations or islands where door clearance is an issue



New GE drawer models

- Multi-level storage system provides flexibility in freezer storage
- Available in stainless, white, bisque and black

Feature gallery: GE Profile® bottom-freezer refrigerators



TurboCool[™] setting


Quickly cools the refrigerator after frequent door openings.



Internal water dispenser Provides chilled, great-tasting water.



Provides a temperaturecontrolled environment for fresh foods.



Slide-out, spillproof glass shelves

Simplify loading, unloading and cleaning.



Adjustable ∕ ClearLook™ crispers

Provide the ideal storage environment for produce.

GE Profile model PFS22SISSS

ab.

(1)





ClimateKeeper[™] system

Keeps temperatures consistent to help keep foods fresh.



Quickly slides out of the way to make room for tall items.



Only GE has it!



ClearLook™ gallon door bins

Hold gallon-size containers with style and ease.



ShelfSaver[™] beverage rack

Provides convenient storage for everything from cans to egg cartons to casserole dishes.





Contoured doors and sculptured handles Provide a dramatic look.



BrightSpace[™] interior Offers flexible storage and 160 watts of GE Reveal[™] lighting for easy viewing.



Fresh food compartment Offers full-access storage with full-width convenience.

The inside story: GE Profile® bottom-freezer refrigerators



ENERGY STAR[®]qualified

Higher energy efficiency means lower utility bills.



Deluxe quiet design Significantly reduces operating noise.



NeverClean™ condenser Encased coils don't require

cleaning in normal operating environments.



FrostGuard™ technology


Defrosts only when needed to reduce freezer burn.



Secure-Close door system

Securely pulls the door shut, even after you release the handle.



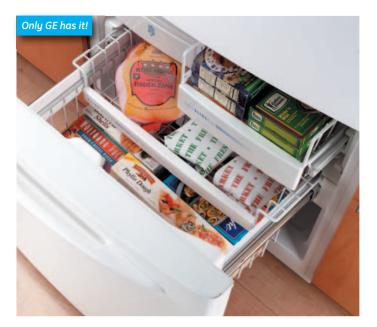

Multi-level Slide 'n Store™ system Allows easy loading and unloading.



Integrated icemaker

Slides out with ease. The ice bin is integrated into the icemaker, so cubes don't fall onto the freezer floor.



GE SmartWater[™] filtration

Upgraded 750-gallon filter removes more impurities, provides one year of clean, fresh-tasting filtered ice, and takes up a small amount of space.

Indicator light reminds you when to change filter, and a reset button reactivates reminder once filter has been replaced.

Dare to compare





Exclusive ClimateKeeper[™] system

- Electronic controls with digital temperature readout are precise and easy to use
- Multiple electronic sensors keep temperatures consistent and help preserve foods
- Multiflow air tower distributes cool air evenly throughout the fresh food compartment



Competitive comparison-temperature management

	GE Profile	Amana	Kenmore	KitchenAid	Maytag	Whirlpool	LG	Samsung
Controls	Electronic Touch	Electronic Touch	Electronic Touch	Electronic Touch	Electronic Touch	Rotary Dial	Electronic Touch	Electronic Touch
Digital temperature readout	YES	No	No	No	No	No	No	Yes
	3	2	2	2	2	2	2	2
Temperature management	sensors	thermostats	thermostats	thermostats	thermostats	thermostats	sensors	sensors
Air tower	YES	No	No	No	No	No	No	Yes
	YES,							
Adaptive defrost	FrostGuard™	No, Timer	No, Timer	No, Timer	No, Timer	No, Timer	Yes	No

The ultimate combination of food-preservation features.

Lighting

 BrightSpace[™] interior uses GE Reveal[™] lighting to cast a clear, natural-looking glow throughout the refrigerator





Competitive comparison—Lighting

	GE Profile	Amana	Kenmore	KitchenAid	Maytag	Whirlpool	LG	Samsung
	120 watts							
Fresh food	GE Reveal™	80 watts	80 watts	80 watts	80 watts	80 watts	120 watts	30 watts
	60 watts							
Freezer	GE Reveal	40 watts	40 watts	40 watts	40 watts	40 watts	40 watts	15 watts
Total	180 watts	120 watts	120 watts	120 watts	120 watts	120 watts	160 watts	45 watts

Door storage

- GE Profile has new adjustable gallon door storage
- The competitor has only small bottle storage





Competitive comparison

	GE Profile	Amana	Kenmore	KitchenAid	Maytag	Whirlpool	LG	Samsung
Adjustable gallon door storage	YES	No	Yes	No	Yes	Yes	Yes	No
Contoured doors	YES	Yes	No	No	No	No	Yes	Yes
Water filtration	750 gallons	750 gallons	N/A	N/A	750 gallons	N/A	300 gallons	N/A

New GE Profile[™] and GE bottom-freezers are turning refrigeration upside down.



Multi-level Slide 'n Store™ system

- Three full-extension baskets maximize available storage space
- Unique configuration allows easy access to all contents, without removing or rearranging items
- Open wire design allows air movement and easy viewing of contents
- Self-closing hinges automatically pull the drawer shut when it's within one inch of the closed position

Competitive comparison 22 cu. ft. models—Freezer Capacity and Flexibility

	GE Profile	Amana	Kenmore	KitchenAid	Maytag	Whirlpool	LG	Samsung
Freezer capacity (cu. ft.)	7.04	6.3	6.8	6.5	6.3	6.4	6.9	6.5
Full-extension basket(s)	3	2	2	2	2	2	2	3
Factory-installed icemaker	Integrated with drawer	Ice bucket slides out with drawer	N/A	Yes	Integrated with drawer			
Self-closing drawer	YES	Yes	Yes	No	Yes	N/A	Yes	N/A
Adaptive defrost	YES, FrostGuard™	No	No	No	No	No	Yes	No

The ultimate in freezer storage flexibility.

Show and tell

GE Profile Arctica® bottom-freezer refrigerators



Internal water dispenser with SmartWater[™] filtration

Show your customers the easy reach location of the internal, filtered water dispenser.

Tell your customers how the filtered water dispenser delivers clean, fresh-tasting water with the slightest of touch.

- -Consumers can enjoy the benefits of bottled water without the bottles water expense.
- —GE SmartWater™ filtration system with filter-reset button provides 750 gallons or a year's worth of clean, fresh-tasting filtered ice—for under 0¢ per gallon. Think of all the money (buying filtered water), time (to the grocery) and space (big gallon jugs taking up valuable fresh food compartment space) consumers save by using the GE SmartWater dispensing system!



Bottom-freezer refrigerators

Available new models



GE® bottom-freezer "H" series

- Offered in 20 and 22 cu. ft. capacities
- Contoured doors
- Upfront controls
- Three glass shelves (two split, one full-width)
- Clear snack pan
- Two clear crispers
- Full-width fixed door bins, one w/gallon storage
- Freezer light
- Reversible doors
- 20 cu. ft. models available in White on white; 22 cu. ft. models available in White on white, Bisque on bisque and Black on black



GE bottom-freezer door and drawer "K" series

- Door models offered in 20 and 22 cu. ft. capacities, drawer models offered in 20 cu. ft. capacity
- Contoured doors
- Upfront illuminated controls
- Four adjustable gallon door storage bins
- One full-width fixed gallon door bin
- GE Reveal[®] lighting
- Available in White on white, Bisque on bisque and Black on black
- Drawer models also available in stainless steel



GE bottom-freezer drawer "M" series

- Offered in 20 and 22 cu. ft. capacities
- Contoured doors and sculptured handles
- Electronic controls with digital temperature readout
- TurboCool[™] setting
- QuickSpace[™] shelf
- Four split spillproof, slide-out glass shelves
- ShelfSaver[™] beverage rack
- Exclusive ClimateKeeper[™] system
- Three full-extension freezer baskets
- ClearLook[™] adjustable gallon door bins
- Optional integrated icemaker with GE SmartWater™ filtration
- Available in White on white, Bisque on bisque, Black on black, stainless steel and **stainless steel wrapped**

GE bottom-freezer french-door "M" series

- Offered in 22 cu. ft. capacity
- French doors
- Available with or without internal water dispenser in White on white, Black on black or stainless steel

GE Profile Arctica® and GE® bottom-freezer refrigerators are turning refrigeration upside down



Stylish Appearance

The doors on top are the new french door style with true stainless steel sculptured handles on stainless and stainless-wrap models



Outstanding Food Preservation Exclusive ClimateKeeper[™] system includes a digital temperature readout, electronic sensors and an air tower for precise temperature control and optimal food freshness



Tremendous Storage Convenience Multi-level Slide 'n Store™ freezer baskets allow easy loading and unloading of frozen foods

top-freezers

New product introductions 2005 GE Profile[™] and GE[®] top-freezer refrigerators

(eje 06)

imagination at work

0 ----



Top-freezer quick pitch

Freshness at every level.



Stunning Appearance

Elegant stainless doors with dramatically sculptured stainless handles complement any décor with their stylish, modern lines.



Exceptional Food Preservation

ClimateKeeper[™] technology is the best temperature management system you can buy, with precise controls, electronic sensors and a multi-flow air tower to keep temperatures consistent and food fresh.



Unparalleled Convenience

Gallon storage in the door, a tilt-out freezer bin and adjustable, slide-out, spillproof shelves are easy to use and add extra versatility to every kitchen.



What's new: Freshness at every level




#1-rated refrigerator

- A leading consumer magazine recently selected the GE Profile Arctica® top-freezer model as America's #1 refrigerator for the third year in a row!
- GE Profile continues to deliver style and performance, leading the industry with consistent advancements in design and innovation
- Our #1-rated model features a digital temperature display and factory-installed icemaker



GE Profile[™] sculptured stainless handles

- Sleek, appealing lines complement the door's gentle contours
- Crafted out of true stainless steel for long-lasting beauty

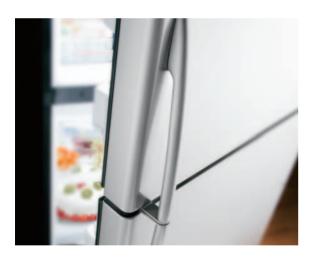

New removable freezer shelf

- Adds an extra shelf for stacking frozen food
- Can be easily removed to store tall items



Upgraded interior



• Enhanced door shelves now offer full gallon storage and help keep smaller items from sliding out



• Soda can storage shelf conveniently dispenses soft drink cans



• New design looks sleeker, yet is even more durable



Increased storage space

- Redesigned to allow extra storage space in every size model
- Existing 15-cu.-ft. refrigerators have become 16s, while 16s have become 17s and 18s have gained additional storage space

Feature gallery: GE Profile™ top-freezer refrigerators



SmartWater[™] and → ice filtration

Delivers clean, fresh-tasting water through the internal water dispenser.



ClimateKeeper[™] system

Digital controls and electronic sensors give you a greater degree of control over food preservation.



Internal water dispenser

Provides chilled, greattasting water on demand, from inside the refrigerator.



Adjustable temperature > deli drawer

Provides a convenient, temperature-controlled environment for meats, cheeses and other favorite foods.



Slide-out, spillproof glass shelves

Simplify loading, unloading and cleaning.



Eth Ethnie G

GE Profile model PTS25SHSSS

Removable freezer shelf

Electronic touch

controls with digital

temperature readout

Precise and easy-to-use, takes the guesswork out of selecting accurate temperatures.

Creates an extra space for stacking frozen food.







ENERGY STAR®-qualified

High energy efficiency means lower utility bills. стиросис

P13233N3	GIRZZORO
PTS25LHS	GTH22SBS
PTS22SHS	GTH22KBR
PTS22LHS	GTH18KBR
PTS22SCS	GTH18JBR
PTS22LCS	GTH16BBS



NeverClean[™] condenser

Condenser coils are encased, so they don't require cleaning in normal operating environments.



FrostGuard[™] technology Defrosts only when needed, reducing freezer burn.

ShelfSaver™ beverage rack Provides convenient storage for a 12-pack, two egg cartons or a 9" x 13" casserole dish.

Adjustable ClearLook™ gallon door bins Hold large containers with





Adjustable humidity crispers

style and ease.

Provide the ideal storage environment for fruits and vegetables.











Exclusive ClimateKeeper[™] system

- Electronic controls with digital temperature readout are precise and easy to use
- Multiple electronic sensors keep temperatures consistent and help preserve refrigerator contents
- Multiflow air tower distributes cool air evenly throughout the fresh food compartment

	Controls	Digital temperature readout	Temperature management	Air tower	Adaptive defrost
GE Profile™	Electronic	Yes	3 sensors	Yes	Yes FrostGuard™
Frigidaire	Mechanical	No	1 sensor	No	No
Kenmore	Electronic	Yes	2 sensors	No	No
Whirlpool	Electromechanical	No	2 thermostats	No	No
KitchenAid	Electromechanical	No	2 thermostats	No	No
Amana	Electromechanical	No	2 sensors	No	No
LG	Electronic	Yes	2 sensors	No	No
Samsung	N/A	N/A	N/A	N/A	N/A



Exclusive FrostGuard[™] technology

- Uses a "prechill" function to lower freezer temperature prior to the defrost cycle
- Reduces freezer burn, so foods retain their texture and flavor

Exclusive cooling technology sets GE Profile and GE top-freezers apart

Competitive comparison





Internal water dispenser with SmartWater™ filtration

- Conveniently located inside the fresh food compartment, the internal water dispenser puts refreshing water well within reach
- Consumers can enjoy the benefits of bottled water without the bottled-water expense
- SmartWater filtration system delivers clean, fresh-tasting water through the internal water dispenser

Competitive comparison

Internal water dispenser	Water filtration			
Yes	6 month / 350 gallon			
No	No			
Yes	6 month / 200 gallon			
Yes	6 month / 200 gallon			
Yes	6 month / 200 gallon			
No	No			
No	No			
N/A	N/A			
	Yes No Yes Yes No No			

When it comes to filtered water, GE has the inside advantage



The ultimate in storage and design flexibility

- Redesigned interior gives consumers more options for storing more food
- Adjustable crispers, adjustable door bins and slide-out, spillproof shelves make the large interior seem even more spacious

Competitive comparison

	Maximum capacity
GE Profile [™]	25 cu. ft.
Frigidaire	21 cu. ft.
Kenmore	22 cu. ft.
Whirlpool	22 cu. ft.
KitchenAid	22 cu. ft.
Maytag	21 cu. ft.

The largest capacity refrigerator to feature an internal water dispenser in the industry!

Top-freezer refrigerators

Available new models



Hotpoint® top-freezer "G" series

- Offered in 17 and 18 cu. ft. capacities
- Upfront temperature controls
- Two full-width glass shelves
- Two clear vegetable/fruit crispers
- Clear snack pan
- Full gallon door storage
- Deluxe quiet design
- NeverClean[™] condenser



GE LOP-ITEEZET F SETIES

- Offered in 18 cu. ft. capacity
- One full-width wire, one split wire and one split glass shelf
- Can storage shelf



GE top-freezer "G" series

- Offered in 18 cu. ft. capacity
- Two full-width glass shelves

Top-freezer refrigerators

Available new models



GE® top-freezer "J" series

- Offered in 17, 18 and 22 cu. ft. capacities
- Upfront illuminated controls
- Two split, one full-width spillproof glass shelves
- Two adjustable humidity clear vegetable/fruit crispers
- Clear snack pan
- Gallon door storage
- Available with factory-installed icemaker*
- Deluxe quiet design
- NeverClean[™] condenser
- Available in CleanSteel™



GE top-freezer "K" series

- Offered in 17, 18 and 22 cu. ft. capacities
- Four split spillproof glass shelves
- Three adjustable gallon door bins*
- Optional internal water dispenser with GE SmartWater™ filtration
- Available with factory-installed icemaker*
- Available in stainless steel with stainless handles*
- Available as an ENERGY STAR®-qualified model*



GE Profile Arctica® top-freezer models

- Offered in 22 and 25 cu. ft. capacities
- ClimateKeeper[™] system
- Upfront electronic touch controls with digital temperature readout
- Four split, spillproof glass shelves (three slide-out)
- ShelfSaver[™] can rack
- ClearLook™ adjustable gallon door bins
- Premium quiet design
- Factory-installed icemaker
- Tilt-out locking freezer door bin
- Removable freezer shelf
- ENERGY STAR-qualified
- Optional internal water dispenser
- Available in stainless steel with stainless handles



Stunning Appearance Elegant stainless doors with dramatically sculptured stainless handles complement any décor with their stylish, modern lines.



Exceptional Food Preservation

ClimateKeeper[™] technology is the best temperature management system you can buy, with precise controls, electronic sensors and a multi-flow air tower to keep temperatures consistent and food fresh.



Unparalleled Convenience

Gallon storage in the door, a tilt-out freezer bin and adjustable, slide-out, spillproof shelves are easy to use and add extra versatility to every kitchen.


GE Profile[™] built-in side-by-side refrigerators

	GE Profile	
	PSB48LSR PSB42LSR	PSB48LGR PSB42LGR
Stainless steel model	•	
Capacity		
Total (cu. ft.)	29.5 / 25.2	29.5 / 25.2
Fresh food (cu. ft.)	18.7 / 15.6	18.7 / 15.6
Freezer (cu. ft.)	10.9 / 9.6	10.9 / 9.6
Shelf area (sq. ft.)	28.2 / 23.4	28.2 / 23.4
Fresh food features		
ClimateKeeper™ system	•	•
Multiflow air system	•	•
Upfront electronic digital display	•	•
Electronic touch temp. controls	Dispenser	Dispenser
Electronic sensors		• Bisperiser
SmartWater™ filtration system	Plus	Plus
SoftTouch dispenser	Crushed ice, cubes, water	Crushed ice, cubes, water
Light		Crushed ice, cubes, water
Door alarm	•	
Quick Ice™ feature	•	•
Water filter indicator light	•	•
	-	-
Cabinet shelves	4 glass	4 glass
Adjustable	3	3
Spillproof	4	4
Deli pan	Clear	Clear
Vegetable/fruit crispers	2 adj. humidity	2 adj. humidity
ClearLook™ door bins	4 (3 adj.)	4 (3 adj.)
Dairy compartment	•	•
Interior light system	Dual-level	Dual-level
Quiet Design	Premium	Premium
NeverClean™ condenser	•	•
ENERGY STAR®	•	•
Freezer features		
Factory-installed automatic		
icemaker & bin	•	•
Wire slide-out baskets	2	2
Wire cabinet shelves	4	4
Fixed door bins	3	3
Interior light	Dual	Dual
Exterior		
Color(s) available*	BV	WV, BV
CustomStyle configuration	Trimless	Installed trim
Door handles	Stainless-look, full-length visor	Stainless-look, full-length visor
Door hinge	Hydraulic damper design	Hydraulic damper design
Adjustable rollers	Front	Front
Weights & Dimensions	TION	1 110112
Height to top of hinge (in.) A	83-29/32	83-29/32
Case depth with door handle (in.) B	26-29/32	26-29/32
	48/42	48/42
Width (in.) C		
Approx. shipping weight (lbs.)	584	549
Power/Rating	120V, 60Hz, 15Amps	120V, 60Hz, 15Amps
Accessories		
Black acrylic panels	N/A	PSPK48DBB / PSPK42DBB
White acrylic panels	N/A	PSPK48DWW / PSPK42DWW

Stainless steel panels PSPK48DSS / PSPK42DSS N/A *Color(s) available: WV = White dispenser and visor handles, BV = Black disp nd visor handle

If installed against a wall, allow clearance of 4" on freezer side to remove bin. Clearance required to remove fresh food full size pan without disassembling is 4". ALL MODELS AVAILABLE IN U.S. AND CANADA.

Built-in refrigerators



*The finished cutout width must be

41-1/2" for 42" models and 47-1/2" for 48" models

74

Flooring

For proper installation, this refrigerator must be placed on a level surface of hard material that is at the same height as the rest of the flooring. This surface should be strong enough to support a fully loaded refrigerator, or approximately 700 lbs.

Trimmed refrigerators

Trimmed refrigerators are designed to be customized with decorative panels. Field installed custom and grille panels are required. You may install 1/4" or 3/4" thick custom panels from your cabinet manufacturer.

IMPORTANT NOTE: dispenser trim

- The refrigerator is supplied with factory installed dispenser trim.
- If panel is less than 1/4" thick, a noticeable gap will be created around the dispenser trim. Foam tape may be applied on the door to improve the fit.
- If panel is more than 1/4" thick, the panel will not fit behind the trim.


IMPORTANT NOTE: panel weight

Maximum weight for Fresh Food panel is 70 pounds and 30 pounds total for Freezer panels..250 + .750 = 1.000 Maximum Total Panel Thickness

1/4" framed panel dimensions 3/4" custom panel dimensions


If you choose to install framed panels, they must be cut to the dimensions shown. The panels will slide into the frame on the door and grille.

For a more custom appearance, 3/4" custom panels must be installed on trimmed models. The custom panel must be cut to dimensions specified below. The custom panel then slides into the trim.

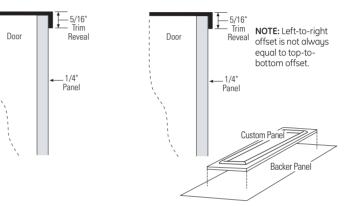

Front panel dimensions (in inches)

	Α	В	С	D	E	F	G
	39-15/16						
48" models	45-31/32	10-3/4	67-7/8	18-15/32	26-15/32	17-13/16	35-5/32



Side panels

Side panels (not supplied) must be used whenever the sides of the refrigerator will be exposed. The 1/4" side panels will slip into the side case trim. Order side panels from your cabinet manufacturer. *Depending on installation height.

Water and electrical locations

The opening must be prepared with the electrical and water supply located as shown. The cutout depth must be 24"

The refrigerator will project forward, slightly beyond adjacent cabinets, depending on your installation.


Additional specifications

- A 120 volt, 60Hz, 15 or 20 amp power supply is required. An individual properly grounded branch circuit or circuit breaker is recommended. Install a properly grounded 3-prong electrical receptacle recessed into the back wall. Electrical must be located on rear wall as shown
- Note: GFI (ground fault interrupter) is not recommended.
- Water line can enter the opening through the floor or rear wall. The water line installed should be 1/4" O.D. copper tubing or GE SmartConnect™ tubing between the cold water line and water connection location. The line should be long enough to extend to the front of the refrigerator. Installation of an easily accessible shutoff valve in the water line is required.

GE Profile Arctica® and GE CustomStyle™ side-by-side refrigerators

	GE Profile™						
	GE Profile			PSC25SGS	PSH25SGS	PSC25MSS	PSH25MSS
	PSC25PSS	PCF25PGS	PSH25PSS	PSC25NGS	PSH25NGS	PSC25MGS	PSH25MGS
Stainless steel model	•		•	•/-	•/-	•/-	•/-
Capacity	24.6	24.6	24.6	24.6	24.6	24.6	24.6
Total (cu. ft.) Fresh food (cu. ft.)	15.28	24.6 15.28	15.28	15.28	15.28	15.28	15.28
Freezer (cu. ft.)	9.32	9.32	9.32	9.32	9.32	9.32	9.32
Shelf area (sq. ft.)	20.2	20.2	20.2	20.2	20.2	20.2	20.2
Fresh food features							
Beverage center	•	•	•				
ClimateKeeper™ system	ClimateKeeper 2 ™		ClimateKeeper2		ClimateKeeper2	ClimateKeeper2	ClimateKeeper2
Dual evaporator Multiflow air system	•	•	•	•	•	•	•
Upfront elect. digital temp. display	•	•	•	•	•	•	•
Upfront elect, touch temp, controls	•	•	•	•	•	•	•
Electronic sensors	•	•	•	•	•	•	•
TurboCool™ setting	•	•	•	•	•	•	•
SmartWater™ filtration system	Plus	Plus	Plus	Plus	Plus	Plus	Plus
11 1 m 1 1 1 1	Crushed ice,	Crushed ice,	Crushed ice,	Crushed ice,	Crushed ice,	Crushed ice,	Crushed ice,
LightTouch! dispenser	cubes, water	cubes, water	cubes, water	cubes, water	cubes, water	cubes, water	cubes, water
Light Child lock	LED	LED	LED	•	•	•	•
Door alarm	•	•	•	•	•	•	•
Quick Ice™ feature	•	•	•	•	•	•	•
Water filter indicator light	•	•	•	•	•	•	•
Cabinet shelves	3 glass	3 glass	3 glass	3 glass	3 glass	3 glass	3 glass
Adjustable	3	3	3	3	3	3	3
Slide-out, spillproof	2	2	2	2	2	2	2
QuickSpace™ shelf	•	•	•	•	•	•	•
Integrated shelf support system Snugger™ clip(s)	1	1	1	2	2	2	2
3-stack drawer system		•		2	2	•	2 •
Deli drawer	Adj. temp.	Adj. temp.	Adj. temp.	Adj. temp.	Adj. temp.	Adj. temp.	Adj. temp.
Vegetable/fruit crisper	Adj. humidity	Adj. humidity	Adj. humidity	Adj. humidity	Adj. humidity	Adj. humidity	Adj. humidity
	CustomCool™	CustomCool	CustomCool	CustomCool	CustomCool		
Sealed drawer	w/full-extension				w/full-extension	Full-extension	Full-extension
ClearLook™ door bins	4 (3 adj.)	4 (3 adj.)	4 (3 adj.)	5 (4 adj.)	5 (4 adj.)	5 (4 adj.)	5 (4 adj.)
Dairy compartment (removable)	•	•	•	In-the-door	In-the-door	In-the-door	
Beverage rack Interior light system	Tri-level	Tri-level	Tri-level	Tri-level	Tri-level	Tri-level	In-the-door Tri-level
Quiet Design	Premium	Premium	Premium	Premium	Premium	Premium	Premium
NeverClean™ condenser	•	•	•	•	•	•	•
ENERGY STAR®	•	•	•	•	•	•	•
Freezer features							
FrostGuard™ technology	•	•	•	•	•	•	•
Factory-installed icemaker	Integrated Ice™	Integrated Ice	Integrated Ice	Integrated Ice	Integrated Ice	Integrated Ice	Integrated Ice
Wire slide-out baskets	4 (3 full-ext.)	4 (3 full-ext.)	4 (3 full-ext.)	4 (3 full-ext.)	4 (3 full-ext.)	3	3
Wire cabinet shelves Wire tilt-out door bin(s)	2 (1 slide-out)	2 (1 slide-out)	2 (1 slide-out)	2 (1 slide-out)	2 (1 slide-out)	2 (1 slide-out)	2 (1 slide-out) 4 (3 adj.)
Door shelves	3 (2 adj.) 1	3 (2 adj.) 1	3 (2 adj.) 1	3 (2 adj.) 1	3 (2 adj.) 1	3 (2 adj.) 1	4 (5 ddj.) 1
Interior light	Dual	Dual	Dual	Dual	Dual	Dual	Dual
Exterior		- Coddi	- Budi	buu	- Budi	buu	buu
				SS	SV	SS	SV
Color(s) available*	SS	WW, BB	SV	BB	BV	WW, BB	BV
					Trimless/		Trimless/
CustomStyle™ configuration	Trimless	Trimless	Trimless	Trimless	Installed trim	Trimless	Installed trim
	Coulotured			Sculptured	Full-length visor/	Sculptured	Full-length visor/
Door handles*	Sculptured stainless steel	CM sculptured	Full-lenath visor	stainless steel/ CM sculptured	CM full-length visor	stainless steel/ CM sculptured	CM full-length visor
Door Hundles	Stull liess steel	High-gloss	1 dil-lerigti visor	Ciri Sculptureu	1301	Chrisculptureu	1301
Exterior design	Rounded doors	rounded doors	Squared doors	Rounded doors	Squared doors	Rounded doors	Squared doors
<u>*</u>					Case only (black)	Case only (black)	Case only (black)
Textured steel door and case	Case only (black)		Case only (black)		•	•	•
Adjustable rollers	Front	Front	Front	Front	Front	Front	Front
Weights & Dimensions	70	70	70.1/2	70	70.1/2	70	70.4/0
Height to top of hinge (in.) A	72 71-1/2	72 71-1/2	72-1/8	72 71-1/2	72-1/8 71-1/2	72 71-1/2	72-1/8 71-1/2
Height to top of case (in.) B Case depth without door (in.) C	23-7/8	23-7/8	71-1/2 23-7/8	23-7/8	23-7/8	23-7/8	23-7/8
Case depth less door handle (in.) D	27-1/8	27-1/8	27-1/8	27-1/8	27-1/8	27-1/8	27-1/8
Case depth with door handle (in.) E	29-9/16	29-9/16	28-11/16	29-9/16	28-11/16	29-9/16	28-11/16
Depth w/fresh food door open							
90° (in.) F	46	46	46	46	46	46	46
Width (in.) G	35-3/4	35-3/4	35-3/4	35-3/4	35-3/4	35-3/4	35-3/4
Width w/door open 90° w/door							
handle (in.) H	38-3/16	38-3/16	37-5/16	38-3/16	37-5/16	38-3/16	37-5/16
Air clearances Each side (in.)	1/8	1/8	1/8	1/8	1/8	1/8	1/8
Top (in.) Back (in.)	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2
Approx. shipping weight (lbs.)	400	400	420	400	420	400	420
Power/Rating	400	1 400		20V, 60Hz, 15Am		1 700	420
Accessories				,, 10, 11			
Factory trim kit attached	N/A	N/A	N/A	N/A	N/A / •	N/A	N/A / •
Black acrylic panels (optional)	N/A	N/A	N/A	N/A	N/A/PSPK25DBB	N/A	N/A /PSPK25DBB
White acrylic panels (optional)	N/A	N/A	N/A	N/A	N/A/PSPK25DWW		N/A/PSPK25DWW
Bisque acrylic panels (optional)	N/A	N/A	N/A	N/A	N/A /PSPK25DCC	N/A	N/A /PSPK25DCC
Stainless steel panels (optional)	N/A	N/A	N/A	N/A	N/A /PSPK25DSS	N/A	N/A /PSPK25DSS
Black collar trim (optional)	N/A	N/A	N/A	N/A	N/A /TRM25BISBB		N/A /TRM25BISBB
White collar trim (optional) Bisque collar trim (optional)	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A/TRM25BISWW N/A/TRM25BISCC		N/A/TRM25BISWW N/A/TRM25BISCC
Stainless steel collar trim (optional)	N/A N/A	N/A N/A	TRM25BISSS	N/A N/A	TRM25BISSS/ N/A		TRM25BISSS/ N/A

GE Profile Arctica® and GE CustomStyle[™] side-by-side refrigerators (see chart on pg. 167)



 Stainless steel collar trim (optional)
 N/A
 N/A
 TRM25BISSS
 N/A
 TRM25BISSS/ N/A
 N/A
 TRM25BISSS/ N/A

 *Color(s) available:
 SV = Stainless steel with visor handles, SS = Stainless steel, WW = White on white, BV = Black with visor handles, BB = Black on black, CM = Color-Matched.
 If installed against a wall, allow clearance of 13-15/16" on freezer side to remove bin. Clearance required to remove fresh food full size pan without disassembling is 18-5/8".

 ALL MODELS AVAILABLE IN U.S. AND CANADA.
 Color-Matched.
 If installed against a wall.
 If installed a

	GE Profile™								GE [®]	
	PSW23PSS	PSH23PSS PSH23PGS	PSC23PSS	PSC23SHR PSC23SGR	PSC23NHS PSC23NGS	PSI23SGR PSI23NGR	PSI23SCR PSI23NCR	PSC23MGS PSI23MGR	GSC23LSR GSC23LGR	GSC22KGR
Stainless steel model	•	•/-	•	● ●	F30251105	•/-	•/-	FJIZJMOK	•/-	UJCZZKUK
Capacity	-	•/				•	•			
Total (cu. ft.)	22.6	22.6	22.6	22.6	22.6	22.6	22.6	22.7	22.7	22.1
Fresh food (cu. ft.)	14.23	14.23	14.38	14.38	14.38	14.38	14.38	14.38	14.38	14.25
Freezer (cu. ft.)	8.38	8.38	8.24	8.17	8.17	8.24	8.19	8.26	8.26	7.83
Shelf area (sq. ft.) Fresh food features	19.7	19.7	19.7	19.7	19.7	19.7	20.6	19.0	18.5	18.2
Refreshment center				•/-	•/-					
Beverage center	•	•	•	•/ -	•/-					
ClimateKeeper™ system	ClimateKeeper 2 ™	ClimateKeeper 2	ClimateKeeper 2	•	•	•	•	•		
Dual evaporator	•	•	•							
Multiflow air system	•	•	•	•	•	•	•	•		
Upfront elect. digital temp. display	•	•	•	•	•	•	•			-
Upfront elect. touch temp. controls	•	•	•	•	•	•	•	•	•	•
Electronic sensors TurboCool™ setting	•	•	•	•	•	•	•	•	•	•
SmartWater™ filtration system	Plus	Plus	Plus	Plus	Plus	Plus	•	Plus	Plus	Plus
indicitatel indicitogotern	Crushed ice,	Crushed ice,	Crushed ice,	Crushed ice,	Crushed ice,	Crushed ice,		Crushed ice,	Crushed ice,	Crushed ice,
LightTouch! dispenser	cubes, water	cubes, water	cubes, water	cubes, water	cubes, water	cubes, water		cubes, water	cubes, water	cubes, water
Light	LED	LED	LED	•	•	•		•	•	•
Child lock	•	•	•	•	•	•		•	•	•
Door alarm	•	•	•	•	•	•		•	•	
Quick Ice™ feature Water filter indicator light	•	•	•	•	•	•		•	•	•
Cabinet shelves	3 glass	3 glass	3 glass	3 glass	3 glass	3 glass	3 glass	3 glass	3 glass	3 glass
Adjustable	3	3	3	3	3	3	3	3	3	3
Slide-out, spillproof	2	2	2	2	2	2	2	2	2	2
QuickSpace™ shelf	•	•	•	•	•	•	•	•	•	
Integrated shelf support system	•	•	•	•	•	•	•	•	•	•
Snugger™ clip(s)	1	1	1	1/2	1/2	2	2	2		
3-stack drawer system			•	•			•	•	• Capitad	• Capital
Deli drawer	Adj. temp.	Adj. temp. Adj. humidity	Adj. temp.	Adj. temp.	Adj. temp.	Adj. temp. Adj. humidity	Adj. temp. Adj. humidity	Adj. temp. Adj. humidity	Sealed Adj. humidity	Sealed Adj. humidity
Vegetable/fruit crisper	Adj. humidity CustomCool™	CustomCool	Adj. humidity CustomCool	Adj. humidity CustomCool	Adj. humidity CustomCool	CustomCool	CustomCool	Adj. numiality	Adj. numiaity	Adj. numiaity
Sealed drawer	w/full-extension		w/full-extension			w/full-extension		Full-extension	•	•
				3 (1 Adj.)	3 (1 Adj.)			r dir exterioion		
ClearLook™ door bins	3 (2 Adj.)	3 (2 Adj.)	3 (2 Adj.)	4 (3 Adj.)	4 (3 Adj.)	4 (3 Adj.)	4 (3 Adj.)	4 (3 Adj.)	4 (3 Adj.)	4 (3 Adj.)
Dairy compartment (removable)	•	•	•	•	•	•	•	•	•	•
					Can storage rack					
Beverage rack	Tri-level	Tri-level	Trillevel	In-the-door	In-the-door	In-the-door Tri-level	In-the-door	In-the-door	Dual laval	Dual laval
Interior light system Quiet Design	Premium	Premium	Tri-level Premium	Tri-level Premium	Tri-level Premium	Premium	Tri-level Premium	Dual-level Premium	Dual-level Deluxe	Dual-level Deluxe
NeverClean™ condenser	•	•	•	•	•	•	•	•	•	e
ENERGY STAR®	•	•	•							
Freezer features										
FrostGuard™ technology	•	•	•	•	•	•	•	•	•	•
										•
	Integrated Ice™	Integrated Ice	Integrated Ice	Integrated Ice	Integrated Ice	Integrated Ice	•	Integrated Ice	Integrated Ice	
Wire slide-out baskets	Integrated Ice™ 4 (3 full-ext.)	Integrated Ice 4 (3 full-ext.)	4 (3 full-ext.)	4 (3 full-ext.)	4 (3 full-ext.)	4 (3 full-ext.)	4 (3 full-ext.)	3	3	1
Wire slide-out baskets Wire cabinet shelves	4 (3 full-ext.) 2	4 (3 full-ext.) 2	4 (3 full-ext.) 2 (1 slide-out)	4 (3 full-ext.) 2 (1 slide-out)	4 (3 full-ext.) 2 (1 slide-out)	4 (3 full-ext.) 2 (1 slide-out)	4 (3 full-ext.) 2 (1 slide-out)	3 2 (1 slide-out)		1 2 (1 slide-out)
Wire slide-out baskets Wire cabinet shelves Wire tilt-out door bin(s)			4 (3 full-ext.)	4 (3 full-ext.)	4 (3 full-ext.)	4 (3 full-ext.)	4 (3 full-ext.)	3	3 2 (1 slide-out)	1 2 (1 slide-out)
Wire slide-out baskets Wire cabinet shelves Wire tilt-out door bin(s) Door shelves	4 (3 full-ext.) 2 3 (2 adj.)	4 (3 full-ext.) 2 3 (2 adj.)	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.)	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.)	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.)	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.)	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.)	3 2 (1 slide-out) 3 (2 adj.)	3 2 (1 slide-out) 4 (2 adj.)	1 2 (1 slide-out) 3 (2 adj.)
Wire slide-out baskets Wire cabinet shelves Wire tilt-out door bin(s) Door shelves Interior light	4 (3 full-ext.) 2	4 (3 full-ext.) 2	4 (3 full-ext.) 2 (1 slide-out)	4 (3 full-ext.) 2 (1 slide-out)	4 (3 full-ext.) 2 (1 slide-out)	4 (3 full-ext.) 2 (1 slide-out)	4 (3 full-ext.) 2 (1 slide-out)	3 2 (1 slide-out)	3 2 (1 slide-out)	1 2 (1 slide-out)
Wire slide-out baskets Wire cabinet shelves Wire tilt-out door bin(s) Door shelves Interior light	4 (3 full-ext.) 2 3 (2 adj.)	4 (3 full-ext.) 2 3 (2 adj.)	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.)	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.)	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.)	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.)	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.)	3 2 (1 slide-out) 3 (2 adj.)	3 2 (1 slide-out) 4 (2 adj.)	1 2 (1 slide-out) 3 (2 adj.)
Wire slide-out baskets Wire cobinet shelves Wire tilt-out door bin(s) Door shelves Interior light Exterior	4 (3 full-ext.) 2 3 (2 adj.)	4 (3 full-ext.) 2 3 (2 adj.) Dual <u>SV</u> WV, CV, BV	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.)	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.)	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV	3 2 (1 slide-out) 3 (2 adj.) Dual <u>WW, CC, BB</u> WV, CV, BV	3 2 (1 slide-out) 4 (2 adj.) Dual	1 2 (1 slide-out) 3 (2 adj.)
Wire slide-out baskets Wire cabinet shelves Wire tilt-out door bin(s) Door shelves Interior light Exterior Color(s) available*	4 (3 full-ext.) 2 3 (2 adj.) Dual SS	4 (3 full-ext.) 2 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u>	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual <u>WW, BB</u> WW, CC, BB	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u>	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u>	3 2 (1 slide-out) 3 (2 adj.) Dual <u>WW, CC, BB</u> WV, CV, BV <u>Trimless</u>	3 2 (1 slide-out) 4 (2 adj.) Dual <u>SS</u> WW, BB	1 2 (1 slide-out) 3 (2 adj.) Single WW, BB
Wire slide-out baskets Wire cabinet shelves Wire tilt-out door bin(s) Door shelves Interior light Exterior Color(s) available*	4 (3 full-ext.) 2 3 (2 adj.) Dual	4 (3 full-ext.) 2 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV Trimless Installed trim	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV Tirimless Installed trim	3 2 (1 slide-out) 4 (2 adj.) Dual <u>SS</u> WW, BB Trimless	1 2 (1 slide-out) 3 (2 adj.) Single
Wire slide-out baskets Wire cabinet shelves Wire tilt-out door bin(s) Door shelves Interior light Exterior Color(s) available*	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless	4 (3 full-ext.) 2 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim Full-length visor	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual <u>WW, BB</u> WW, CC, BB	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u>	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim Full-length visor	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV Irimless Installed trim CM sculptured	3 2 (1 slide-out) 4 (2 adj.) Dual <u>SS</u> WW, BB Trimless Tubular	1 2 (1 slide-out) 3 (2 adj.) Single WW, BB
Wire slide-out baskets Wire cabinet shelves Wire tilt-out door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle™ configuration	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured	4 (3 full-ext.) 2 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual WW, BB WW, CC, BB Trimless	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV Trimless Installed trim CM sculptured CM full-length	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel	1 2 (1 slide-out) 3 (2 adj.) Single WW, BB Trimless
Wire slide-out baskets Wire cabinet shelves Wire tilt-out door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle™ configuration	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel	4 (3 full-ext.) 2 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim Full-length visor	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual <u>WW, BB</u> WW, CC, BB	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u>	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim Full-length visor	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV <u>Trimless</u> Installed trim <u>CM sculptured</u> CM full-length visor	3 2 (1 slide-out) 4 (2 adj.) Dual <u>SS</u> WW, BB Trimless Tubular	1 2 (1 slide-out) 3 (2 adj.) Single WW, BB
Wire slide-out baskets Wire cabinet shelves Wire titl-out door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle™ configuration Door handles*	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap	4 (3 full-ext.) 2 3 (2 adj.) Dual WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual WW, BB WW, CC, BB Trimless CM sculptured	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual WV, CV, BV Installed trim Full-length visor CM full-length visor	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV <u>Trimless</u> Installed trim <u>CM sculptured</u> CM full-length visor Rounded doors	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM	1 2(1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM
Wire slide-out baskets Wire cabinet shelves Wire titt-out door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle™ configuration Door handles*	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel	4 (3 full-ext.) 2 3 (2 adj.) Dual WV, CV, BV Installed trim Full-length visor CM full-length visor Squared doors	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual WW, BB WW, CC, BB Trimless	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual WV, CV, BV Installed trim Full-length visor CM full-length visor Squared doors	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV <u>Trimless</u> Installed trim <u>CM sculptured</u> CM full-length visor	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular <u>stainless steel</u> CM Rounded doors	1 2 (1 slide-out) 3 (2 adj.) Single WW, BB Trimless
Wire slide-out baskets Wire cabinet shelves Wire tilt-out door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle™ configuration Door handles* Exterior design	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap	4 (3 full-ext.) 2 3 (2 adj.) Dual WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual WW, BB WW, CC, BB Trimless CM sculptured	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual WV, CV, BV Installed trim Full-length visor CM full-length visor Squared doors	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV Installed trim CM sculptured CM full-length visor Rounded doors Squared doors	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM	1 2(1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM
Wire slide-out baskets Wire cabinet shelves Wire tit-out door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle TM configuration Door handles* Exterior design Textured steel door and case Adjustable rollers	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap	4 (3 full-ext.) 2 3 (2 adj.) Dual SV WV, CV, BV Installed trim Full-length visor CM full-length visor Squared doors Case only (black)	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual WW, BB WW, CC, BB Trimless CM sculptured Rounded doors	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual <u>SV</u> WV, CV, BV Installed trim Full-length visor CM full-length visor Squared doors Case only (black)	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors Case only (black)	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV Trimless Installed trim CM sculptured CM full-length visor Rounded doors Squared doors	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM Rounded doors Case only (black)	1 2 (1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors
Wire slide-out baskets Wire cut-out door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle™ configuration Door handles* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All	4 (3 full-ext.) 2 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only (black)</u> <u>All</u>	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual WW, BB WW, CC, BB Trimless CM sculptured Rounded doors All	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SV WV, CV, BV Trimless Installed trim Full-length visor CM full-length visor Squared doors Case only (black) Case only All	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only (black)</u> <u>Case only</u> <u>All</u>	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV Irrimless Installed trim CM sculptured CM full-length visor Squared doors Squared doors Squared doors All	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM Rounded doors Case only (black) Front	1 2 (1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors Front
Wire slide-out baskets Wire cabinet shelves Wire tilt-out door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle™ configuration Door handles* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All 70-1/2†	4 (3 full-ext.) 2 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only (black)</u> <u>All</u> 69-1/4	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual WW, BB WW, CC, BB Trimless CM sculptured Rounded doors All 69-1/4	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only (black)</u> <u>Case only</u> All <u>69-1/4</u>	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length</u> visor CM full-length visor Squared doors <u>Case only</u> (black) <u>Case only</u> All <u>69-1/4</u>	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV Trimless Installed trim CM sculptured CM full-length visor Rounded doors Squared doors Squared doors Case only All 69-1/4	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM Rounded doors Case only (black) • Front 69-1/4	1 2 (1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors • Front 69-1/4
Wire slide-out baskets Wire clit-out door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle™ configuration Door handles* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All	4 (3 full-ext.) 2 3 (2 adj.) Dual WV, CV, BV Trimless Installed trim Full-length visor CM full-length visor Squared doors Case only (black) All 69-1/4 68-3/4	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual WW, BB WW, CC, BB Trimless CM sculptured Rounded doors All	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual VV, CV, BV Installed trim Full-length visor CM full-length visor Squared doors Case only (black) Case only All 69-1/4 68-3/4	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only (black)</u> <u>Case only (black)</u>	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV Irimless Installed trim CM sculptured CM full-length visor Rounded doors Squared doors Squared doors Case only All 69-1/4 68-3/4	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM Rounded doors Case only (black) Front	1 2 (1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors Front
Wire slide-out baskets Wire cut-out door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle™ configuration Door handles* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of funge (in.) A Height to top of door trim (in.) B	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All 70-1/2† 70-1/2	4 (3 full-ext.) 2 3 (2 adj.) Dual WV, CV, BV Installed trim Full-length visor CM full-length visor Squared doors <u>Case only (black)</u> All 69-1/4 68-3/4 70-1/4	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4	4 (3 full-ext.) 2 (1 slide-out) 3 (2 odj.) Dual WW, BB WW, CC, BB Trimless CM sculptured Rounded doors All 69-1/4 68-3/4	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual WV, CV, BV Intrimless Installed trim Full-length visor CM full-length visor Squared doors Case only (black) Case only All 69-1/4 68-3/4 70-1/4	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual SV WV, CV, BV Trimless Installed trim Full-length visor CM full-length visor Squared doors <u>Case only (black)</u> Case only (black) Case only (black) Ges-1/4 68-3/4 70-1/4	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV Installed trim CM sculptured CM full-length visor Rounded doors Squared doors Squared doors Gase only All 69-1/4 68-3/4 - / 70-1/4	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM Rounded doors Case only (black) • Front 69-1/4 68-3/4	1 2 (1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors Front 69-1/4 68-3/4
Wire slide-out baskets Wire cabinet shelves Wire tilt-out door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle™ configuration Door handles* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of door trim (in.) Case depth without door (in.) C	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All 70-1/2† 70-1/2 24-3/8	4 (3 full-ext.) 2 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only (black)</u> <u>All</u> <u>69-1/4</u> 68-3/4 70-1/4 23-7/8	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual WW, BB WW, CC, BB Trimless CM sculptured Rounded doors All 69-1/4 68-3/4 23-7/8	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SV WV, CV, BV Installed trim Full-length visor CM full-length visor Squared doors Case only (black) Case only All 69-1/4 68-3/4 70-1/4 23-7/8	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV Installed trim Full-length visor CM full-length visor Squared doors Case only (black) Case only All <u>69-1/4</u> <u>69-1/4</u> 23-7/8	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV Irrimless Installed trim CM sculptured CM full-length visor Rounded doors Squared doors Squared doors Cose only All 69-1/4 68-3/4 - / 70-1/4 23-7/8	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM Rounded doors Case only (black) • Front 69-1/4 68-3/4 23-7/8	1 2 (1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors • Front 69-1/4 68-3/4 23-7/8
Wire slide-out baskets Wire cabinet shelves Wire tito-out door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle™ configuration Door handles* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Height to top of door trim (in.) Case depth without door (in.) C Case depth less door handle (in.) D	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All 70-1/2† 70-1/2 24-3/8 27-1/4	4 (3 full-ext.) 2 3 (2 adj.) Dual <u>SV</u> <u>WV, CV, BV</u> <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only (black)</u> <u>All</u> <u>69-1/4</u> <u>68-3/4</u> 70-1/4 <u>23-7/8</u> <u>26-3/4</u>	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual WW, BB WW, CC, BB Trimless CM sculptured Rounded doors All 69-1/4 68-3/4 23-7/8 26-3/4	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only</u> (black) <u>Case only</u> All <u>69-1/4</u> <u>68-3/4</u> 70-1/4 <u>23-7/8</u> <u>26-3/4</u>	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV <u>Installed trim</u> <u>Full-length visor</u> CM full-length visor CM full-length visor Squared doors <u>Case only</u> Case only All <u>69-1/4</u> <u>68-3/4</u> 70-1/4 <u>23-7/8</u> <u>26-3/4</u>	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV Trimless Installed trim <u>CM sculptured</u> CM sculptured CM full-length visor Rounded doors Squared doors Squared doors Squared doors Case only All 69-1/4 68-3/4 - / 70-1/4 23-7/8 26-3/4	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM Rounded doors Case only (black) Front 69-1/4 68-3/4 23-7/8 26-3/4	1 2 (1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors • Front 69-1/4 68-3/4 23-7/8 26-3/4
Wire slide-out baskets Wire clit-out door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle TM configuration Door handles* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of case (in.) A Height to top of nige (in.) A Height to top of door trim (in.) Case depth without door (in.) C Case depth with door handle (in.) D Case depth with door handle (in.) D	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All 70-1/2† 70-1/2 24-3/8	4 (3 full-ext.) 2 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only (black)</u> <u>All</u> <u>69-1/4</u> 68-3/4 70-1/4 23-7/8	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual WW, BB WW, CC, BB Trimless CM sculptured Rounded doors All 69-1/4 68-3/4 23-7/8	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SV WV, CV, BV Installed trim Full-length visor CM full-length visor Squared doors Case only (black) Case only All 69-1/4 68-3/4 70-1/4 23-7/8	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV <u>Installed trim</u> <u>Full-length visor</u> CM full-length visor CM full-length visor Squared doors <u>Case only</u> Case only All <u>69-1/4</u> <u>68-3/4</u> 70-1/4 <u>23-7/8</u> <u>26-3/4</u>	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV Irrimless Installed trim CM sculptured CM full-length visor Rounded doors Squared doors Squared doors Cose only All 69-1/4 68-3/4 - / 70-1/4 23-7/8	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM Rounded doors Case only (black) Front 69-1/4 68-3/4 23-7/8 26-3/4	1 2 (1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors • Front 69-1/4 68-3/4 23-7/8
Wire slide-out baskets Wire cobinet shelves Wire tit-out door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle™ configuration Door handles* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of finge (in.) A Height to top of case (in.) B Height to top of case (in.) B Height to top of case (in.) C Case depth without door (in.) C Case depth with door handle (in.) E Depth w/fresh food door open	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All 70-1/2† 70-1/2 24-3/8 27-1/4 29-11/16	4 (3 full-ext.) 2 3 (2 adj.) Dual <u>SV</u> <u>WV, CV, BV</u> <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor <u>Squared doors</u> <u>Case only (black)</u> <u>All</u> <u>69-1/4</u> <u>68-3/4</u> 70-1/4 <u>23-7/8</u> <u>26-3/4</u>	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual WW, BB WW, CC, BB Trimless CM sculptured Rounded doors All 69-1/4 68-3/4 23-7/8 26-3/4	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Intimless</u> Installed trim <u>Full-length</u> visor Squared doors <u>Case only (black)</u> <u>Case only (black)</u>	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV <u>Installed trim</u> <u>Full-length visor</u> CM full-length visor CM full-length visor Squared doors <u>Case only</u> Case only All <u>69-1/4</u> <u>68-3/4</u> 70-1/4 <u>23-7/8</u> <u>26-3/4</u>	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV Trimless Installed trim <u>CM sculptured</u> CM sculptured CM full-length visor Rounded doors Squared doors Squared doors Squared doors Case only All 69-1/4 68-3/4 - / 70-1/4 23-7/8 26-3/4	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM Rounded doors Case only (black) Front 69-1/4 68-3/4 23-7/8 26-3/4	1 2 (1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors • Front 69-1/4 68-3/4 23-7/8 26-3/4
Wire slide-out baskets Wire cobinet shelves Wire tilt-out door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle™ configuration Door handles* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of fonge (in.) B Height to top of door trim (in.) Case depth without door (in.) C Case depth less door handle (in.) E Depth w/fresh food door open 90° (in.) F	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All 70-1/2† 70-1/2 24-3/8 27-1/4	4 (3 full-ext.) 2 3 (2 adj.) Dual <u>SV</u> <u>WV, CV, BV</u> <u>Installed trim</u> <u>Full-length visor</u> <u>CM full-length visor</u> <u>Squared doors</u> <u>Case only (black)</u> <u>All</u> <u>68-3/4</u> 70-1/4 23-7/8 26-3/4 28-5/16	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual WW, BB WW, CC, BB Trimless CM sculptured Rounded doors All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only</u> (black) <u>Case only</u> All <u>69-1/4</u> <u>68-3/4</u> 70-1/4 <u>23-7/8</u> <u>26-3/4</u>	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only (black)</u> <u>Case only (black)</u>	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV Installed trim CM sculptured CM full-length visor Rounded doors Squared doors Squared doors Squared doors Case only All 69-1/4 68-3/4 - / 70-1/4 23-7/8 26-3/4 29-3/16 / 28-5/16	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM Rounded doors Case only (black) ● Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16	1 2 (1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors • Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16
Wire slide-out baskets Wire cobinet shelves Wire tit-out door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle™ configuration Door handles* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of hange (in.) A Height to top of case (in.) B Height to top of case (in.) B Desth without door nandle (in.) C Case depth with door handle (in.) E Depth w/fresh food door open 30° (in.) F Width (in.) G	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All 70-1/2† 70-1/2 24-3/8 27-1/4 29-11/16 46-1/16	4 (3 full-ext.) 2 3 (2 adj.) Dual <u>SV</u> <u>WV, CV, BV</u> <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor <u>Squared doors</u> <u>Case only (black)</u> <u>69-1/4</u> 68-3/4 70-1/4 23-7/8 26-3/4 28-5/16 45-9/16	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual WW, BB WW, CC, BB Trimless CM sculptured Rounded doors All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual <u>SV</u> <u>WV, CV, BV</u> <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor <u>Case only (black)</u> <u>Case only (</u>	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV Intralled trim Full-length visor CM full-length visor Squared doors Case only (black) Case only All <u>69-1/4</u> <u>68-3/4</u> 28-5/16 45-9/16	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV Irrimless Installed trim CM sculptured CM full-length visor Rounded doors Squared doors Case only All 69-1/4 68-3/4 - / 70-1/4 23-7/8 26-3/4 29-3/16 / 28-5/16 45-9/16	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM Rounded doors Case only (black) ● Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16	1 2 (1 slide-out) 3 (2 odj.) Single WW, BB Trimless CM Rounded doors • Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16
Wire slide-out baskets Wire clit-out door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle™ configuration Door handles* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of finge (in.) A Height to top of case (in.) B Height to top of case (in.) B Height to top of cose (in.) B Height to top of cose (in.) C Case depth without door (in.) C Case depth with door handle (in.) E Depth w/fresh food door open 90° (in.) F Width (in.) G Width w/door open 90° w/door handle (in.) H	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All 70-1/2† 70-1/2 24-3/8 27-1/4 29-11/16 46-1/16 36-3/16† 41-5/16	4 (3 full-ext.) 2 3 (2 adj.) Dual SV WV, CV, BV Irrimless Installed trim Full-length visor CM full-length visor CM full-length visor Squared doors Case only (black) All 68-3/4 70-1/4 23-7/8 26-3/4 28-5/16 35-3/4 40	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 35-3/4 41	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 35-3/4 41	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual WW, BB WW, CC, BB Trimless CM sculptured Rounded doors All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 35-3/4 41	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SV WV, CV, BV Installed trim Full-length visor CM full-length visor Squared doors Case only (black) Case only All 69-1/4 68-3/4 70-1/4 23-7/8 26-3/4 28-5/16 35-3/4 40	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only (black)</u> <u>Case only (black)</u>	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV Installed trim CM sculptured CM full-length visor Squared doors Squared doors Squared doors Case only All 69-1/4 68-3/4 - / 70-1/4 23-7/8 26-3/4 29-3/16 / 28-5/16 35-3/4 41/40	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM Rounded doors Case only (black) ● Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41-3/16 40-3/4	1 2 (1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors • Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 40-3/4
Wire slide-out baskets Wire cobinet shelves Wire tit-out door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle™ configuration Door handles* Exterior design Fextured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Height to top of case (in.) B Height to top of door trim (in.) Case depth with door handle (in.) D Case depth with door handle (in.) E Depth w/fresh food door open 90° (in.) F Width (in.) G Width (in.) G Width (in.) H Air clearances Each side (in.)	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All 70-1/2† 70-1/2 24-3/8 27-1/4 29-11/16 46-1/16 36-3/16†† 41-5/16 1/8	4 (3 full-ext.) 2 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only</u> (black) <u>0</u> All <u>69-1/4</u> <u>68-3/4</u> 70-1/4 <u>23-7/8</u> <u>26-3/4</u> <u>28-5/16</u> <u>45-9/16</u> <u>35-3/4</u> <u>40</u> <u>1/8</u>	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/8	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 35-3/4 41 1/8	4 (3 full-ext.) 2 (1 slide-out) 3 (2 odj.) Dual WW, BB WW, CC, BB Trimless CM sculptured Rounded doors All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 35-3/4 41 1/8	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only</u> (black) Case only All 69-1/4 68-3/4 70-1/4 28-5/16 45-9/16 35-3/4 40 1/8	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV <u>Installed trim</u> <u>Full-length visor</u> CM full-length visor CM full-length visor Squared doors <u>Case only</u> blackly <u>Case only</u> blackly <u>Case only</u> All <u>69-1/4</u> <u>68-3/4</u> 70-1/4 <u>23-7/8</u> <u>26-3/4</u> <u>28-5/16</u> <u>35-3/4</u> <u>40</u> 1/8	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV Irimless Installed trim CM sculptured CM sculptured CM full-length visor Rounded doors Squared doors Squared doors Case only All 69-1/4 68-3/4 -/ 70-1/4 23-7/8 26-3/4 29-3/16 / 28-5/16 35-3/4 41/40 1/8	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular CM Comment CM Rounded doors Case only (black) Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41-3/16 40-3/4 1/8	1 2 (1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors • Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 40-3/4 1/8
Wire slide-out baskets Wire slide-out door bin(s) Door shelves Mire clit-out door bin(s) Door shelves nterior light Exterior Color(s) available* CustomStyle™ configuration Door handles* Exterior design Fextured steel door and case Adjustable rollers Weights & Dimensions Height to top of case (in.) B Height to top of door trim (in.) Case depth without door (in.) C Case depth with door handle (in.) B Weight N/fresh food door open B0° (in.) F Width (in.) G Width w/door open 90° w/door handle (in.) H Air clearances Each side (in.) Top (in.)	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All 70-1/2† 70-1/2 24-3/8 27-1/4 29-11/16 36-3/16†† 41-5/16 1/8 1	4 (3 full-ext.) 2 3 (2 adj.) Dual WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only</u> (black) 69-1/4 68-3/4 70-1/4 23-7/8 26-3/4 28-5/16 45-9/16 35-3/4 40 1/8 1	4 (3 full-ext.) 2 (1 slide-out) 3 (2 odj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/8 1	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/8 1	4 (3 full-ext.) 2 (1 slide-out) 3 (2 odj.) Dual WW, BB WW, CC, BB Trimless CM sculptured Rounded doors All 69-1/4 68-3/4 23-7/8 26-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/8 1	4 (3 full-ext.) 2 (1 slide-out) 3 (2 odj.) Dual <u>SV</u> WV, CV, BV <u>Inimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only (black)</u> <u>Case only (black)</u>	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual SV WV, CV, BV Trimless Installed trim Full-length visor CM full-length visor Squared doors Case only (black) Case only All 69-1/4 68-3/4 70-1/4 23-7/8 26-3/4 28-5/16 35-3/4 40 1/8 1	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV <u>Trimless</u> Installed trim <u>CM sculptured</u> CM sculptured CM full-length visor <u>Rounded doors</u> Squared doors Squared doors <u>Case only</u> All <u>69-1/4</u> 68-3/4 - / 70-1/4 23-7/8 26-3/4 29-3/16 (28-5/16 35-3/4 41/40 1/8 1	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM Rounded doors Case only (black) 69-1/4 68-3/4 23-7/8 26-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41-3/16 40-3/4 1/8 1	1 2 (1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors • Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 40-3/4 1/8 1
Mire slide-out baskets Mire cobinet shelves Mire titt-out door bin(s) Door shelves nterior light Exterior Color(s) available* CustomStyle™ configuration Door handles* Exterior design Exterior design Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of finge (in.) A Height to top of fange (in.) A Height to top of door trim (in.) Case depth without door (in.) C Case depth without door (in.) C Case depth with door handle (in.) E Dopth w/fresh food door open 90° (in.) F Midth (in.) G Width w/door open 90° w/door handle (in.) H Air clearance Each side (in.) Top (in.) Back (in.)	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All 70-1/2† 70-1/2 24-3/8 27-1/4 29-11/16 46-1/16 36-3/16†† 41-5/16 1/8 1 1	4 (3 full-ext.) 2 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Irimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only (black)</u> • All • • • • • • • •	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/8 1 1/2	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 35-3/4 41 1/8 1 1/2	4 (3 full-ext.) 2 (1 slide-out) 3 (2 odj.) Dual WW, BB WW, CC, BB Trimless CM sculptured Rounded doors All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 35-3/4 41 1/8 1 1/2	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Intimless</u> Installed trim <u>Full-length</u> visor Squared doors <u>Case only (black)</u> <u>Case only (black)</u>	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV <u>Installed trim</u> <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only (black)</u> Case only (black) <u>Case only (black)</u> <u>Case only </u>	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV <u>Trimless</u> Installed trim <u>CM sculptured</u> CM full-length visor Rounded doors Squared doors Squared doors Squared doors Case only All 68-3/4 - / 70-1/4 23-7/8 26-3/4 29-3/16 / 28-5/16 35-3/4 41/40 1/2	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM Rounded doors Case only (black) ● Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41-3/16 40-3/4 1/2	1 2 (1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors • Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 35-3/4 45-9/16 35-3/4 40-3/4 1/8 1 1/2
Wire slide-out baskets Wire cabinet shelves Wire tito-out door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle™ configuration Door handles* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Height to top of door trim (in.) Case depth with door handle (in.) E Depth w/fresh food door open 90° (in.) F Width (in.) G Width (in.) H Air clearances Each side (in.) Back (in.) Approx. shipping weight (lbs.)	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All 70-1/2† 70-1/2 24-3/8 27-1/4 29-11/16 46-1/16 36-3/16†† 41-5/16 1/8 1 1 350	4 (3 full-ext.) 2 3 (2 adj.) Dual WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only</u> (black) 69-1/4 68-3/4 70-1/4 23-7/8 26-3/4 28-5/16 45-9/16 35-3/4 40 1/8 1	4 (3 full-ext.) 2 (1 slide-out) 3 (2 odj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/8 1	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/8 1	4 (3 full-ext.) 2 (1 slide-out) 3 (2 odj.) Dual WW, BB WW, CC, BB Trimless CM sculptured Rounded doors All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/8 1 1/2 334	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SV WV, CV, BV Trimless Installed trim Full-length visor CM full-length visor Squared doors Case only (black) Case only (black) Case only All 69-1/4 68-3/4 70-1/4 28-5/16 45-9/16 35-3/4 40 1/8 1 1/2 334	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual SV WV, CV, BV Trimless Installed trim Full-length visor CM full-length visor Squared doors Case only (black) Case only All 69-1/4 68-3/4 70-1/4 23-7/8 26-3/4 28-5/16 35-3/4 40 1/8 1	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV <u>Trimless</u> Installed trim <u>CM sculptured</u> CM sculptured CM full-length visor <u>Rounded doors</u> Squared doors Squared doors <u>Case only</u> All <u>69-1/4</u> 68-3/4 - / 70-1/4 23-7/8 26-3/4 29-3/16 (28-5/16 35-3/4 41/40 1/8 1	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM Rounded doors Case only (black) 69-1/4 68-3/4 23-7/8 26-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41-3/16 40-3/4 1/8 1	1 2 (1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors • Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 40-3/4 1/8 1 1/2 334
Wire slide-out baskets Wire clit-out door bin(s) Door shelves Door shelves Exterior Color(s) available* CustomStyle™ configuration Door handles* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of case (in.) B Height to I bas door handle (in.) C Case depth with door handle (in.) E Dopth w/fresh food door open 90° (in.) F Width (in.) G Width (in.) A Approx. shipping weight (lbs.) Power/Rating	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All 70-1/2† 70-1/2 24-3/8 27-1/4 29-11/16 46-1/16 36-3/16†† 41-5/16 1/8 1 1	4 (3 full-ext.) 2 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Irimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only (black)</u> • All • • • • • • • •	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/8 1 1/2	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 35-3/4 41 1/8 1 1/2	4 (3 full-ext.) 2 (1 slide-out) 3 (2 odj.) Dual WW, BB WW, CC, BB Trimless CM sculptured Rounded doors All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/8 1 1/2 334	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Intimless</u> Installed trim <u>Full-length</u> visor Squared doors <u>Case only (black)</u> <u>Case only (black)</u>	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV <u>Installed trim</u> <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only (black)</u> Case only (black) <u>Case only (black)</u> <u>Case only </u>	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV <u>Trimless</u> Installed trim <u>CM sculptured</u> CM full-length visor Rounded doors Squared doors Squared doors Squared doors Case only All 68-3/4 - / 70-1/4 23-7/8 26-3/4 29-3/16 / 28-5/16 35-3/4 41/40 1/2	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM Rounded doors Case only (black) ● Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41-3/16 40-3/4 1/2	1 2 (1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors • Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 35-3/4 45-9/16 35-3/4 40-3/4 1/8 1 1/2
Mire slide-out baskets Mire cobinet shelves Mire tit-out door bin(s) Door shelves nterior light Exterior Color(s) available* CustomStyle™ configuration Door handles* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Height to top of door trim (in.) Case depth without door (in.) C Case depth with door handle (in.) D Case depth with door handle (in.) E Depth w/fresh food door open 30° (in.) F Width (in.) G Width (in.) G Width (in.) H Air clearances Each side (in.) Back (in.) Paprox. shipping weight (lbs.) Pacessories	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All 70-1/2† 70-1/2 24-3/8 27-1/4 29-11/16 46-1/16 36-3/16†† 41-5/16 1/8 1 350 ◀	4 (3 full-ext.) 2 3 (2 adj.) Dual <u>SV</u> <u>WV, CV, BV</u> <u>Installed trim</u> <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only (black)</u> <u>All</u> 69-1/4 68-3/4 70-1/4 23-7/8 26-3/4 28-5/16 45-9/16 35-3/4 40 1/8 1 1 338	4 (3 full-ext.) 2 (1 slide-out) 3 (2 odj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/8 1 1/2 334	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/8 1 1/2 334	4 (3 full-ext.) 2 (1 slide-out) 3 (2 odj.) Duol WW, BB WW, CC, BB Trimless CM sculptured Rounded doors All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/8 1 1/2 334 - 120V, 60H	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SV WV, CV, BV Trimless Installed trim Full-length visor CM full-length visor Squared doors Case only (black) Case only (black) Case only All 69-1/4 68-3/4 70-1/4 28-5/16 45-9/16 35-3/4 40 1/8 1 1/2 334	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual SV WV, CV, BV Trimless Installed trim Full-length visor CM full-length visor Squared doors <u>Case only</u> (black) Case only All 68-3/4 70-1/4 23-7/8 26-3/4 28-5/16 35-3/4 40 1/8 1 1/2 334	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV Irimless Installed trim CM sculptured CM sculptured CM full-length visor Rounded doors Squared doors Squared doors Squared doors Case only All 69-1/4 68-3/4 - / 70-1/4 23-7/8 26-3/4 29-3/16 / 28-5/16 35-3/4 41/40 1/8 1 1/2 334	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM Rounded doors Case only (black) ● Front 69-1/4 68-3/4 26-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41-3/16 40-3/4 1 1/2 334	1 2(1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors ● Front 69-1/4 68-3/4 23-7/8 26-3/4 26-3/4 29-3/16 45-9/16 35-3/4 40-3/4 1 1/2 334 ●
Wire slide-out baskets Wire cabinet shelves Wire tabor to door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle™ configuration Door handles* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of door trim (in.) Case depth without door (in.) C Case depth without door (in.) C Case depth without door (in.) C Case depth without door nandle (in.) D Case depth without door nandle (in.) D Case depth without door nandle (in.) E Depth w/fresh food door open 90° (in.) F Width (in.) G Width (in.) H Air clearances Each side (in.) Back (in.) Approx. shipping weight (lbs.) Power/Rating Accessories Factory trim kit attached	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All 70-1/2† 70-1/2 24-3/8 27-1/4 29-11/16 46-1/16 36-3/16†† 41-5/16 1/8 1 1 350	4 (3 full-ext.) 2 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Irimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only (black)</u> • All • • • • • • • •	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/8 1 1/2 334	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 35-3/4 41 1/8 1 1/2	4 (3 full-ext.) 2 (1 slide-out) 3 (2 odj.) Dual WW, BB WW, CC, BB Trimless CM sculptured Rounded doors All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/8 1 1/2 334	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SV WV, CV, BV Trimless Installed trim Full-length visor CM full-length visor Squared doors Case only (black) Case only All 69-1/4 68-3/4 70-1/4 28-5/16 45-9/16 35-3/4 40 1/8 1 1/2 334 iz, 15Amps	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV <u>Installed trim</u> <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only (black)</u> Case only (black) <u>Case only (black)</u> <u>Case only </u>	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV Irimless Installed trim CM sculptured CM scul	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM Rounded doors Case only (black) ● Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41-3/16 40-3/4 1/8 1 1/2 334	1 2 (1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors • Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 40-3/4 1/8 1 1/2 334
Mire slide-out baskets Mire cobinet shelves Mire tit-out door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle™ configuration Door handles* Exterior design Fextured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Height to In J Case depth with door handle (in.) F Do? (in.) F Width (in.) G Width (in.) H Approx. shipping weight (lbs.) Power/Rating Accessories Factory trim kit attached Black acrylic panels (optional)	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All 70-1/2† 70-1/2 24-3/8 27-1/4 29-11/16 46-1/16 36-3/16†† 41-5/16 1/8 1 350 ◀	4 (3 full-ext.) 2 3 (2 adj.) Dual SV WV, CV, BV Trimless Installed trim Full-length visor CM full-length visor Squared doors Case only (black) 0 All 69-1/4 68-3/4 70-1/4 26-3/4 28-5/16 45-9/16 35-3/4 40 1/8 1 338 N/A/●	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 35-3/4 41 1/8 1 1/2 334 N/A N/A	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/8 1 1/2 334	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual WW, BB WW, CC, BB Trimless CM sculptured Rounded doors All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/8 1 1/2 334 120V, 60H	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SV WV, CV, BV Trimless Installed trim Full-length visor CM full-length visor Squared doors Case only (black) Case only All 69-1/4 68-3/4 70-1/4 28-5/16 45-9/16 35-3/4 40 1/8 1 1/2 334 iz, 15Amps	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV <u>Trimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only (black)</u> <u>Case only (black)</u>	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV <u>Trimless</u> Installed trim <u>CM sculptured</u> CM <u>sculptured</u> CM <u>sculptured</u> CM <u>sculptured</u> CM <u>sculptured</u> CM <u>sculptured</u> CM <u>sculptured</u> CM <u>sculptured</u> CM <u>sculptured</u> 2 adj. <u>Rounded doors</u> <u>©</u> <u>Case only</u> All <u>69-1/4</u> 68-3/4 - / 70-1/4 <u>23-7/8</u> 26-3/4 29-3/16 / 28-5/16 35-3/4 <u>41/40</u> <u>1/8</u> <u>1</u> <u>1/2</u> <u>1/2</u> <u>334</u> <u>N/A / ●</u> N/A / ●SPK23DBB	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM Rounded doors Case only (black) ● Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41-3/16 40-3/4 1/8 1 1/2 334	1 2 (1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors • Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 40-3/4 1/2 334 •
Wire slide-out baskets Wire cabinet shelves Wire tabor to door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle™ configuration Door handles* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of door trim (in.) Case depth withod door (in.) C Case depth withod door (in.) C Case depth withod door nandle (in.) B Depth w/fresh food door open 90° (in.) F Width (in.) G Width (in.) H Air clearances Each side (in.) Top (in.) Back (in.) Approx. shipping weight (lbs.) Power/Rating Accessories Factory tim kit attached Black acrylic panels (optional) White acrylic panels (optional) Bisque acrylic panels (optional)	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All 70-1/2† 70-1/2 24-3/8 27-1/4 29-11/16 46-1/16 36-3/16†† 41-5/16 1/8 1 350 ◀ N/A N/A N/A N/A	4 (3 full-ext.) 2 3 (2 adj.) Dual <u>SV</u> <u>WV, CV, BV</u> <u>Trimless</u> Installed trim <u>Full-length visor</u> <u>CM full-length</u> visor <u>Squared doors</u> <u>Case only (black)</u> <u>6</u> <u>All</u> <u>6</u> <u>6</u> <u>6</u> <u>6</u> <u>7</u> <u>7</u> <u>7</u> <u>7</u> <u>6</u> <u>8</u> <u>8</u> <u>8</u> <u>8</u> <u>8</u> <u>8</u> <u>8</u> <u>8</u>	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/8 1 1/2 334 N/A N/A N/A N/A	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/8 1 1/2 334 N/A N/A N/A N/A	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual WW, BB WW, CC, BB Trimless CM sculptured Rounded doors All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/8 1 1/2 334 120V, 60H N/A N/A N/A	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SV WV, CV, BV Trimless Installed trim Full-length visor CM full-length visor Case only (black) Case only (4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV <u>Installed trim</u> <u>Full-length visor</u> CM full-length visor Squared doors <u>Case only</u> (black) <u>Case only</u> (black) <u>Case only</u> (black) <u>Case only</u> (black) <u>Case only</u> All <u>69-1/4</u> <u>68-3/4</u> 70-1/4 <u>23-7/8</u> <u>26-3/4</u> <u>28-5/16</u> <u>35-3/4</u> <u>40</u> <u>1/8</u> <u>1</u> <u>1/2</u> <u>334</u> <u>N/A / ●</u> <u>N/A / ●</u> <u>SPK23CBB</u> <u>N/A / ●</u> <u>N/A / ●</u> <u>SPK23CCW</u>	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV <u>Trimless</u> Installed trim <u>CM sculptured</u> CM sculptured CM full-length visor Rounded doors Squared doors Squared doors Squared doors Case only All 68-3/4 - / 70-1/4 23-7/8 26-3/4 29-3/16 / 28-5/16 35-3/4 29-3/16 / 28-5/16 35-3/4 1/2 334 N/A / ● N/A / ● SPK23DBB N/A / ●SPK23DBB N/A / ●SPK23DBB	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular tubular CM Rounded doors Case only (black) ● Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41-3/16 40-3/4 1/2 334 N/A N/A N/A N/A	1 2(1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors ● Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 35-3/4 45-9/16 35-3/4 40-3/4 1 1/2 334 ● N/A N/A N/A N/A
Wire slide-out baskets Wire cabinet shelves Wire tit-out door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle™ configuration Door handles* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Height to top of case (in.) Case depth without door nand (in.) C Case depth with door handle (in.) D Case depth with door handle (in.) D Case depth with door nande (in.) E Depth w/fresh food door open 90° (in.) F Width (in.) G Width (in.) G Width (in.) A Air clearances Each side (in.) Top (in.) Back (in.) Approx. shipping weight (lbs.) Power/Rating Accessories Factory tim kit attached Black acrylic panels (optional) Wihte acrylic panels (optional) Bisque acrylic panels (optional)	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All 70-1/2† 70-1/2 24-3/8 27-1/4 29-11/16 46-1/16 36-3/16†† 41-5/16 11 350 ◀ N/A N/A N/A N/A	4 (3 full-ext.) 2 3 (2 adj.) Dual SV WV, CV, BV Trimless Installed trim Full-length visor CM full-length visor Squared doors Case only (black) ● All 69-1/4 68-3/4 70-1/4 23-7/8 26-3/4 28-5/16 45-9/16 35-3/4 40 1/8 1 1 338 N/A / ●SPK23DBB N/A / PSPK23DBB N/A / PSPK23DCB	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 35-3/4 41 1/8 1 1/2 334 N/A N/A N/A N/A N/A	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 35-3/4 41 1/8 1 1/2 334 N/A N/A N/A N/A	4 (3 full-ext.) 2 (1 slide-out) 3 (2 odj.) Dual WW, BB WW, CC, BB Trimless CM sculptured Rounded doors All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 35-3/4 41 1/8 1 1/2 334 - 120V, 60H N/A N/A N/A N/A	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SV WV, CV, BV Trimless Installed trim Full-length visor CM full-length visor Squared doors Case only (black) Case only (blac	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual <u>SV</u> WV, CV, BV <u>Installed trim</u> <u>Full-length visor</u> CM full-length visor Squared doors <u>Squared doors</u> <u>Case only blackly</u> <u>Case only blackly blackly blackl</u>	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV Irimless Installed trim CM sculptured CM sculptured CM full-length visor Rounded doors Squared doors Case only All 69-1/4 68-3/4 - / 70-1/4 68-3/4 - / 70-1/4 23-7/8 26-3/4 29-3/16 / 28-5/16 35-3/4 41/40 1/8 1 1/2 334 N/A / ● N/A / PSPK23DBB N/A / PSPK23DCB	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM Rounded doors Case only (black) Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41-3/16 40-3/4 1/8 1 1/2 334 N/A N/A N/A N/A N/A	1 2(1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors ● Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 40-3/4 1/8 1 1/2 334 ■ N/A N/A N/A N/A N/A
Wire slide-out baskets Wire cabinet shelves Wire tit-out door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle™ configuration Door handles* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of case (in.) B Height to top of case (in.) B Height to top of door trim (in.) Case depth without door (in.). C Case depth with door handle (in.) D Case depth with door nandle (in.) D Case depth with door nandle (in.) E Depth w/fresh food door open 90° (in.). F Width (in.) G Width (in.) A Approx. shipping weight (lbs.) Power/Rating Accessories Factory trim kit attached Black acrylic panels (optional) Bicale acrylic panels (optional) Bicale carylic panels (optional) Bicale carylic panels (optional) Bicale carylic panels (optional)	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All 70-1/2† 70-1/2 70-1/2 24-3/8 27-1/4 29-11/16 46-1/16 36-3/16†† 41-5/16 1/8 1 1 350 ◀ N/A N/A N/A N/A N/A	4 (3 full-ext.) 2 3 (2 adj.) Dual SV WV, CV, BV Installed trim Full-length visor CM full-length visor Squared doors Case only (black) 69-1/4 68-3/4 70-1/4 23-7/8 26-3/4 28-5/16 45-9/16 35-3/4 40 1/8 1 1 338 N/A / ● N/A / PSPK23DBB N/A / PSPK23DBW N/A / PSPK23DBW N/A / PSPK23DBW N/A / PSPK23DSW N/A / PSPK23DSW	4 (3 full-ext.) 2 (1 slide-out) 3 (2 odj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 29-3/16 45-9/16 35-3/4 21/8 1 1/8 1 1/2 334 N/A N/A N/A N/A N/A N/A	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 29-3/16 45-9/16 35-3/4 29-3/16 45-9/16 35-3/4 29-3/16 45-9/16 33-3/4 N/A N/A N/A N/A N/A N/A N/A N/A	4 (3 full-ext.) 2 (1 slide-out) 3 (2 odj.) Dual WW, BB WW, CC, BB Trimless CM sculptured Rounded doors All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/8 1 1/2 334 1/8 1 1/2 334 120V, 60H N/A N/A N/A N/A N/A	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Inimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors Case only (black) Case only (black) Case only All <u>69-1/4</u> 68-3/4 70-1/4 23-7/8 26-3/4 28-5/16 <u>45-9/16</u> 35-3/4 <u>40</u> 1/8 <u>1</u> <u>1/2</u> <u>334</u> iz, 15Amps — <u>PSPK23DBB</u> <u>PSPK23DBB</u> <u>PSPK23DBB</u> <u>PSPK23DBB</u> <u>PSPK23DBB</u> <u>PSPK23DBB</u> <u>PSPK23DBB</u> <u>PSPK23DBB</u> <u>PSPK23DBB</u> <u>PSPK23DBB</u> <u>PSPK23DSS</u> <u>TRMBISBB</u>	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual SV WV, CV, BV Installed trim Full-length visor CM full-length visor Squared doors Case only (black) Case	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV <u>Trimless</u> Installed trim CM sculptured CM sculptured CM full-length visor <u>Rounded doors</u> Squared doors Squared doors <u>Case only</u> All <u>69-1/4</u> 68-3/4 - / 70-1/4 23-7/8 26-3/4 29-3/16 / 28-5/16 35-3/4 29-3/16 / 28-5/16 35-3/4 <u>41/40</u> <u>1/8</u> <u>1</u> <u>1/2</u> <u>334</u> <u>N/A / ●</u> N/A / PSPK23DBB N/A / PSPK23DDSW N/A / PSPK23DSWW N/A / PSPK23DSS N/A / TRMBISBB	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM Rounded doors Case only (black) Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41-3/16 40-3/4 1/8 1 1/2 1/8 1 1/8 1 1/8 1 1/8 1 1/8 1 1/8 N/A N/A N/A N/A N/A N/A N/A N/A	1 2(1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors ● Front 69-1/4 68-3/4 23-7/8 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 40-3/4 1/2 1/2 334 N/A N/A N/A N/A N/A N/A N/A N/A
Wire slide-out baskets Wire cabinet shelves Wire tit-out door bin(s) Door shelves Interior light Exterior Color(s) available* CustomStyle™ configuration Door handles* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of door trim (in.) Case depth without door (in.) C Case depth without door (in.) C Case depth without door (in.) C Case depth with door handle (in.) B Height to top of ase (in.) B Height to ID of Case (in.) B Height to top of for a (in.) B Case depth with door handle (in.) P Case depth with door handle (in.) P Case depth with door handle (in.) P Width u/door open 90° w/door handle (in.) H Air clearances Each side (in.) Back (in.) Back (in.) Back (in.) Bisque acrylic panels (optional) White acrylic panels (optional) White collar trim (optional) White collar trim (optional)	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All 70-1/2† 70-1/2 24-3/8 27-1/4 29-11/16 36-3/16†† 41-5/16 1/8 1 1 1 350 ◀ N/A N/A N/A N/A N/A N/A	4 (3 full-ext.) 2 3 (2 adj.) Dual SV WV, CV, BV Trimless Installed trim Full-length visor CM full-length visor Squared doors Case only (black) ● All 69-1/4 68-3/4 70-1/4 23-7/8 26-3/4 28-5/16 35-3/4 40 1/8 1 1 1 338 N/A / ● N/A / PSPK23DBE N/A / PSPK23DWW N/A / TRMBISBB N/A / TRMBISBW	4 (3 full-ext.) 2 (1 slide-out) 3 (2 odj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 23-7/8 26-3/4 23-7/8 26-3/4 41 1/2 35-3/4 41 1/2 334 N/A N/A N/A N/A N/A N/A	4 (3 full-ext.) 2 (1 slide-out) 3 (2 odj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/2 334 1/8 1 1/2 334 N/A N/A N/A N/A N/A N/A	4 (3 full-ext.) 2 (1 slide-out) 3 (2 odj.) Duol WW, BB WW, CC, BB Trimless CM sculptured Rounded doors • All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/8 1 1/2 334 41 1/2 334 N/A N/A N/A N/A N/A	4 (3 full-ext.) 2 (1 slide-out) 3 (2 odj.) Dual SV WV, CV, BV Installed trim Full-length visor CM full-length visor Squared doors Case only (black) Case o	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual SV WV, CV, BV Trimless Installed trim Full-length visor CM full-length visor Squared doors Case only (black) Case only (black) Case only (black) Case only (black) Case only (black) Case only All 68-3/4 70-1/4 23-7/8 26-3/4 26-3/4 28-5/16 35-3/4 40 1/8 1 1/2 334 N/A / ●SPK23CCS N/A / PSPK23CCW N/A / PSPK23CCW N/A / PSPK23CCW N/A / PSPK23CCCC N/A / PSPK23CCCC N/A / PSPK23CCCC N/A / PSPK23CCCC N/A / TRMBISBB N/A / TRMBISBB	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV Irimless Installed trim CM sculptured CM sculptured CM full-length visor Rounded doors Squared doors Squared doors Case only All 68-3/4 - / 70-1/4 23-7/8 26-3/4 29-3/16 / 28-5/16 35-3/4 41/40 1/8 1 1/2 334 N/A / ●SPK23DBB N/A / PSPK23DBB N/A / PSPK23DCW N/A / PSPK23DCW N/A / PSPK23DCW N/A / PSPK23DCW N/A / PSPK23DCW N/A / PSPK23DCW	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM Rounded doors Case only (black) ● Front 69-1/4 68-3/4 23-7/8 26-3/4 23-7/8 26-3/4 23-7/8 26-3/4 41-3/16 40-3/4 1 1 1/2 334 N/A N/A N/A N/A N/A N/A N/A N/A	1 2(1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors ● Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 40-3/4 10 11 1/2 334 N/A N/A N/A N/A N/A N/A N/A N/A
Color(s) available* CustomStyle™ configuration Door handles* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of door trim (in.) Case depth without door (in.) C Case depth without door open 90° (in.) F Width (in.) G Width (in.) H Air clearances Each side (in.) Back (in.) Approx. shipping weight (lbs.) Power/Rating Accessories Factory trim kit attached	4 (3 full-ext.) 2 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Full-wrap contoured All 70-1/2† 70-1/2 24-3/8 27-1/4 29-11/16 46-1/16 36-3/16†† 41-5/16 1/8 1 1 350 ◀ N/A N/A N/A N/A N/A	4 (3 full-ext.) 2 3 (2 adj.) Dual SV WV, CV, BV Installed trim Full-length visor CM full-length visor Squared doors Case only (black) 69-1/4 68-3/4 70-1/4 23-7/8 26-3/4 28-5/16 45-9/16 35-3/4 40 1/8 1 1 338 N/A / ● N/A / PSPK23DBB N/A / PSPK23DBW N/A / PSPK23DBW N/A / PSPK23DBW N/A / PSPK23DSW N/A / PSPK23DSW	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/2 334 N/A N/A N/A N/A N/A N/A N/A N/A	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual SS Trimless Sculptured stainless steel Rounded doors Case only (black) All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 29-3/16 45-9/16 35-3/4 29-3/16 45-9/16 35-3/4 29-3/16 45-9/16 33-3/4 N/A N/A N/A N/A N/A N/A N/A N/A	4 (3 full-ext.) 2 (1 slide-out) 3 (2 odj.) Dual WW, BB WW, CC, BB Trimless CM sculptured Rounded doors All 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41 1/8 1 1/2 334 1/8 1 1/2 334 120V, 60H N/A N/A N/A N/A N/A	4 (3 full-ext.) 2 (1 slide-out) 3 (2 adj.) Dual <u>SV</u> WV, CV, BV <u>Inimless</u> Installed trim <u>Full-length visor</u> CM full-length visor Squared doors Case only (black) Case only (black) Case only All <u>69-1/4</u> 68-3/4 70-1/4 23-7/8 26-3/4 28-5/16 <u>45-9/16</u> 35-3/4 <u>40</u> 1/8 <u>1</u> <u>1/2</u> <u>334</u> iz, 15Amps — <u>PSPK23DBB</u> <u>PSPK23DBB</u> <u>PSPK23DBB</u> <u>PSPK23DBB</u> <u>PSPK23DBB</u> <u>PSPK23DBB</u> <u>PSPK23DBB</u> <u>PSPK23DBB</u> <u>PSPK23DBB</u> <u>PSPK23DBB</u> <u>PSPK23DSS</u> <u>TRMBISBB</u>	4 (3 full-ext.) 2 (1 slide-out) 4 (3 adj.) Dual SV WV, CV, BV Installed trim Full-length visor CM full-length visor Squared doors Case only (black) Case	3 2 (1 slide-out) 3 (2 adj.) Dual WW, CC, BB WV, CV, BV Irimless Installed trim CM sculptured CM sculptured CM full-length visor Rounded doors Squared doors Squared doors Case only All 68-3/4 - / 70-1/4 23-7/8 26-3/4 29-3/16 / 28-5/16 35-3/4 41/40 1/8 1 1/2 334 N/A / ●SPK23DBB N/A / PSPK23DBB N/A / PSPK23DCW N/A / PSPK23DCW N/A / PSPK23DCW N/A / PSPK23DCW N/A / PSPK23DCW N/A / PSPK23DCW	3 2 (1 slide-out) 4 (2 adj.) Dual SS WW, BB Trimless Tubular stainless steel CM Rounded doors Case only (black) Front 69-1/4 68-3/4 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 41-3/16 40-3/4 1/8 1 1/2 1/8 1 1/8 1 1/8 N/A N/A N/A N/A N/A N/A N/A	1 2(1 slide-out) 3 (2 adj.) Single WW, BB Trimless CM Rounded doors ● Front 69-1/4 68-3/4 23-7/8 23-7/8 26-3/4 29-3/16 45-9/16 35-3/4 40-3/4 1/2 1/2 334 N/A N/A N/A N/A N/A N/A N/A N/A

 Stainless steel collar trim (optional)
 N/A
 TRMBISSS / N/A
 N/A
 N/A
 N/A

 **Color(s) available: SV = Stainless steel with visor handles, SS = Stainless steel, WV = White with visor handles, WW = White on white, CV = Bisque with visor handles, CC = Bisque on bisque, BV = Black with visor handles, BB = Black on black, CM = Color-Matched.
 TWhen cap is removed: 69-1/4".


 †Width excluding caps: 35-7/8".
 *
 *
 *
 *

 N/A
 TRMBISSS / N/A
 N/A
 N/A
 N/A

 If installed against a wall, allow clearance of 13-15/16" on freezer side to remove bin.
 Clearance required to remove fresh food full size pan without disassembling is 18-5/8".
 ALL MODELS AVAILABLE IN U.S. AND CANADA.


GE Profile Arctica CustomStyle[™] side-by-side installation information & specifications

Rough-in dimensions

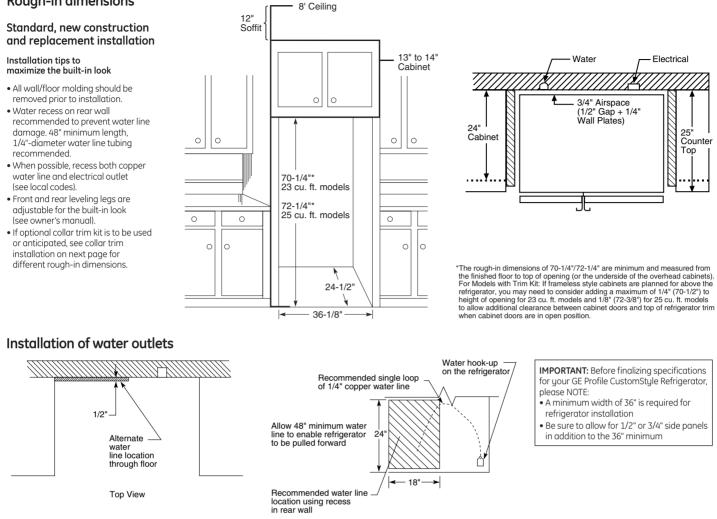

Create a custom look for your GE Profile CustomStyle side-by-side refrigerator

Still another advantage offered by GE Profile CustomStyle Refrigerators is ease of installation. For a refrigerator that does so much to enhance the beauty of your kitchen, the "behind-the-scenes" preparation and installation are surprisingly simple.

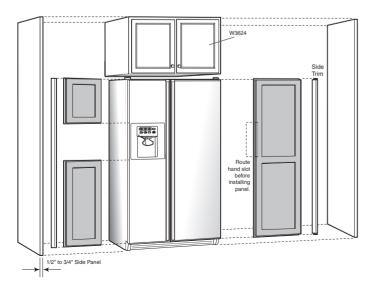

Fabricating the enclosure


Bear Wall View

- The drawing shows an 84" cabinet elevation. Adjust dimensions accordingly for other cabinet elevations
- Cabinet pieces to order: (2) side panels and (1) wall cabinet.
- Side panels will typically be attached to adjacent cabinets and/or cleated to rear wall and floor
- Refer to GE refrigerator installation instructions for proper plumbing, and electrical and air clearances
- (1) Some framed cabinet lines will make a refrigerator enclosure with a cabinet 12" high x 39" wide with sides and 1-1/2" face frame extended down to floor to create the refrigerator space. This will replace the above construction. (2) A tall cabinet on either side of the refrigerator can replace a side panel.
- Counter overhangs on either side of the refrigerator should have clipped corners to allow for full door swing.
- If the refrigerator has a wall returning beyond the front of the refrigerator on either side, a 2" tall filler will help allow for movement of the door.

Door Panels

- See drawings for exact dimensions of the fresh-food and freezer door panels.
- Refrigerator door fronts from stock and most semi-custom cabinet manufacturers will be supplied as 1/4"-thick panels cut to dimensions, with closest available standard door sizes applied to front.
- -This will leave a "reveal" at top/bottom and sides. Width of "reveal" will depend on manufacturer's standard door sizes
- -Door will be affixed on the 1/4" panels at factory or in the field by the local supplier, depending on manufacturer.
- Local shop-built or custom cabinet supplier may fabricate custom 3/4" panels. In this case, edges must be routed.
- Follow notes on drawing to assure room for fingers/hands to open handles.

Door panel dimensions

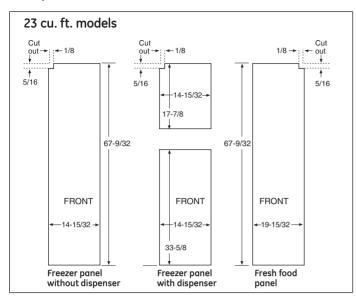


Order your own custom wood panels to match cabinetry or other decor.


Panels up to 1/4" thick will fit door frame with no special preparation. Add filler behind material thinner than 1/4" for proper fit.

Weight Limits: Total weight of panels (i.e., both freezer panels)—Fresh Food = 38 lbs., Freezer = 28 lbs.

Note: Panels up to 3/4" will require special routing area around handles. Dimensions may vary depending on depth of panel.

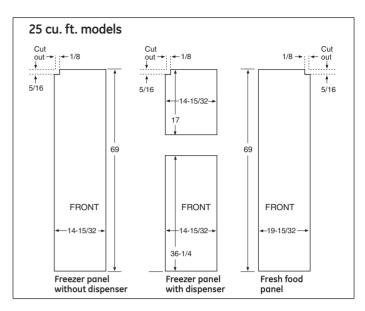

Detail C

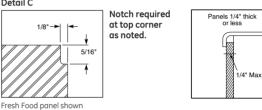



Collar trim installation

An enclosure is required to match up to the trim (see Typical Installation). To obtain the most integrated look, the cabinet or soffit above the refrigerator should extend out to the same depth as the side panels. The refrigerator opening must have minimum dimensions of 70-1/4" high x 36-1/8" wide x 24-1/2" deep for 23 cu. ft. models and 72-1/4" high x 36-1/8" wide x 24-1/2" for 25 cu. ft. models, as shown at right. If there is an overhead cabinet, allow 1" for cabinet door clearance with the top trim piece so the cabinet doors can be opened without hitting the top trim. If 1/2" side panels are used, then side trim and panel will be even. If 3/4" side panels are used, then some of the side panel will extend beyond the trim and must be finished.


IMPORTANT: Before finalizing specifications for your GE Profile CustomStyle Refrigerator, please NOTE


- A minimum width of 36-1/8" is required for refrigerator installation with collar
- Be sure to allow for 1/2" or 3/4" side panels in addition to the 36-1/8" minimum

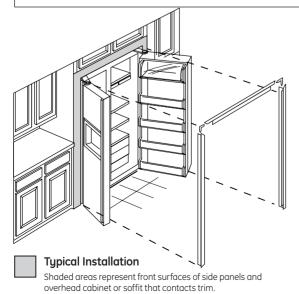

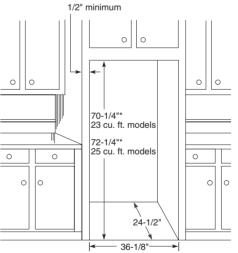

"The rough-in dimensions of 70-1/4"/72-1/4" are minimum and measured from the finished floor to top of opening (or the underside of the overhead cabinets). For Models with Trim Kit: If frameless style cabinets are planned for above the refrigerator, you may need to consider adding a maximum of 1/4" (70-1/2") to height of opening for 23 cu. ft. models and 1/8" (72-3/8") for 25 cu. ft. models to allow additional clearance between cabinet doors and top of refrigerator trim when cabinet doors are in open position.





GE Profile Arctica® side-by-side refrigerators


	GE Profile™								
	PSS29NHS	PSS29NGS	PSS27SGR	PSW26PSS	PSS26PSS	PSF26PGS	PSS26SHR	PSS26NHS	
Stainless steel model			•	•	•		•		
Capacity									
Total (cu. ft.)	28.7	28.6	26.5	25.5	25.5	25.5	25.5	25.5	
Fresh food (cu. ft.)	17.92	17.85	16.60	15.81	15.81	15.81	16.18	16.18	
Freezer (cu. ft.)	10.68	10.68	9.92	9.71	9.71	9.71	9.48	9.48	
Shelf area (sq. ft.)	24.0	25.0	23.8	23.1	23.7	23.7	22.1	22.1	
Fresh food features									
Refreshment center	•						•	•	
Beverage center				•	•	•			
ClimateKeeper™ system	•	•	•	ClimateKeeper 2	ClimateKeeper2	ClimateKeeper 2 ™	•	•	
Dual evaporator				•	•	•			
Multiflow air system	•	•	•	•	•	•	•	•	
Upfront electronic digital temp. display	•	•	•	٠	•	•	•	•	
Upfront electronic touch									
temperature controls	•	•	•	•	•	•	•	•	
Electronic sensors	•	٠	•	•	•	•	٠	•	
TurboCool™ setting	•	•	•	•	•	•	•	•	
SmartWater™ filtration system	Plus	Plus	Plus	Plus	Plus	Plus	Plus	Plus	
	Crushed ice,	Crushed ice,	Crushed ice,	Crushed ice,	Crushed ice,	Crushed ice,	Crushed ice,	Crushed ice,	
LightTouch! dispenser	cubes, water	cubes, water	cubes, water	cubes, water	cubes, water	cubes, water	cubes, water	cubes, water	
Light	•	•	•	LED	LED	LED	•	•	
Child lock	•	•	•	•	•	•	•	•	
Door alarm	•	•	•	•	•	•	•	•	
Quick Ice™ feature	•	•	•	•	•	•	•	•	
Water filter indicator light	•	•	•	•	•	•	•	•	
Cabinet shelves	3 glass	3 glass	3 glass	3 glass	3 glass	3 glass	3 glass	3 glass	
Adjustable	3	3	3	3	3	3	3	3	
Slide-out, spillproof	2	2	2	2	2	2	2	2	
QuickSpace™ shelf	•	•	•	•	•	•	•	•	
Integrated shelf support system	•	•	•	•	•	•	•	•	
Snugger™ clip(s)	2	2	2	2	2	2	2	2	
3-stack drawer system	•	•	•	•	•	•	•	•	
Deli drawer	Adj. temp.	Adj. temp.	Adj. temp.	Adj. temp.	Adj. temp.	Adj. temp.	Adj. temp.	Adj. temp.	
Vegetable/fruit crisper	Adj. humidity	Adj. humidity	Adj. humidity	Adj. humidity	Adj. humidity	Adj. humidity	Adj. humidity	Adj. humidity	
vegetable/Itali crisper	CustomCool™	CustomCool	CustomCool	CustomCool	CustomCool	CustomCool	CustomCool	CustomCool	
Sealed drawer	w/full-extension	w/full-extension	w/full-extension	w/full-extension	w/full-extension	w/full-extension	w/full-extension	w/full-extension	
ClearLook™ door bins	3 (1 adj.)	4 (3 adj.)	4 (3 adj.)	3 (2 adj.)	3 (2 adj.)	3 (2 adj.)	3 (1 adj.)	3 (1 adj.)	
Dairy compartment (removable)	•	• (5 ddj./	• (5 ddj.)	•	• •	•	•	•	
Beverage rack	Can storage rack	In-the-door	In-the-door	-	-	-	Can storage rack	Can storage rack	
Interior light system	Tri-level	Tri-level	Tri-level	Tri-level	Tri-level	Tri-level	Tri-level	Tri-level	
Quiet Design	Premium	Premium	Premium	Premium	Premium	Premium	Premium	Premium	
NeverClean™ condenser	•	•	•	•	•	•	•	•	
ENERGY STAR®	•	•	•	•	•	•	•	•	
Freezer features				•	•	•	•	•	
FrostGuard™ technology	•	•	•	•	•	•	•	•	
Integrated Ice™ system	•	•	•	•	•	•	•	•	
	-					-			
Wire slide-out baskets Wire cabinet shelves	4 (3 full-ext.) 2	4 (3 full-ext.) 2	4 (3 full-ext.) 2	4 (3 full-ext.) 2	4 (3 full-ext.) 2	4 (3 full-ext.) 2	4 (3 full-ext.)	4 (3 full-ext.) 2	
Wire tilt-out door bin(s)	2 3 (2 adj.)	2 3 (2 adj.)	2 3 (2 adj.)	2 3 (2 adj.)	2 3 (2 adj.)	2 3 (2 adj.)	2 3 (2 adj.)	2 3 (2 adj.)	
		3 (2 ddj.) 1			3 (2 ddj.) 1		3 (2 ddj.) 1		
Door shelves Interior light	1 Dual	Dual	1 Dual	1 Dual	Dual	1 Dual	Dual	1 Dual	
Exterior	Duui	Duui	Duui	Duui		Duui	Duui	Duui	
	14/14/ 00	14/14/ DD	CC	CC	- CC		CC	WW, CC, BB	
Color(s) available*	WW, BB	WW, BB	SS	SS	SS	WW, WS, BB	SS		
Door handle(s)	Color-matched	Color-matched	Sculptured	Sculptured stainless steel	Sculptured	Color-matched	Sculptured	Color-matched	
	sculptured	sculptured	stainless steel		stainless steel	sculptured	stainless steel	sculptured	
Exterior design	Contourod	Contourod	Contoured	Full-Wrap	Contourod	High-gloss contoured	Contourod	Contourod	
Exterior design Textured steel door and case	Contoured	Contoured •	Contourea Case only (black)	contoured	Contoured Case only (black)	Case only	Contoured Case only (black)	Contoured •	
				Front					
Adjustable rollers	Front	Front	Front	Front	Front	Front	Front	Front	
Weights & Dimensions	CO 1/4	C0.1/4	C0 1/4	70.1/0++	C0.1//	CO 1/4	C0.1//	(0.1//	
Height to top of hinge (in.) A	69-1/4	69-1/4	69-1/4	70-1/2++	69-1/4	69-1/4	69-1/4	69-1/4	
		co 7//	68-3/4	70-1/2	68-3/4	68-3/4	68-3/4	68-3/4	
Height to top of case (in.) B	68-3/4	68-3/4		20 1 /2				28	
Case depth without door(in.) C †	68-3/4 28	28	28	28-1/2	28	28	28		
Case depth without door(in.) C † Case depth less door handle (in.) D†	68-3/4 28 33-9/16	28 33-9/16	28 32-1/4	32-3/4	32-1/4	32-1/4	32-1/4	32-1/4	
Case depth without door(in.) C † Case depth less door handle (in.) D† Case depth with door handle (in.) E†	68-3/4 28 33-9/16 36	28 33-9/16 36	28 32-1/4 34-7/8	32-3/4 35-3/8	32-1/4 34-7/8	32-1/4 34-11/16	32-1/4 34-7/8	32-1/4 34-11/16	
Case depth without door(in.) C † Case depth less door handle (in.) D† Case depth with door handle (in.) E† Depth w/fresh food door open 90°(in.) F †	68-3/4 28 33-9/16 36 50-1/16	28 33-9/16 36 50-1/16	28 32-1/4 34-7/8 50-1/16	32-3/4 35-3/8 50-9/16	32-1/4 34-7/8 50-1/16	32-1/4 34-11/16 50-1/16	32-1/4 34-7/8 50-1/16	32-1/4 34-11/16 50-1/16	
Case depth without door(in.) C † Case depth less door handle (in.) D† Case depth with door handle (in.) E† Depth w/fresh food door open 90°(in.) F † Width (in.) G	68-3/4 28 33-9/16 36	28 33-9/16 36	28 32-1/4 34-7/8	32-3/4 35-3/8	32-1/4 34-7/8	32-1/4 34-11/16	32-1/4 34-7/8	32-1/4 34-11/16	
Case depth without door(in.) C † Case depth less door handle (in.) D† Case depth with door handle (in.) E† Depth w/fresh food door open 90°(in.) F † Width (in.) G Width w/door open 90°	68-3/4 28 33-9/16 36 50-1/16 35-3/4	28 33-9/16 36 50-1/16 35-3/4	28 32-1/4 34-7/8 50-1/16 35-3/4	32-3/4 35-3/8 50-9/16 36-3/16**	32-1/4 34-7/8 50-1/16 35-3/4	32-1/4 34-11/16 50-1/16 35-3/4	32-1/4 34-7/8 50-1/16 35-3/4	32-1/4 34-11/16 50-1/16 35-3/4	
Case depth without door(in.) C † Case depth less door handle (in.) D† Case depth with door handle (in.) E† Depth w/fresh food door open 90°(in.) F † Width (in.) G Width w/door open 90° w/door handle (in.) H	68-3/4 28 33-9/16 36 50-1/16 35-3/4 45-1/2	28 33-9/16 36 50-1/16 35-3/4 45-1/2	28 32-1/4 34-7/8 50-1/16 35-3/4 42-3/8	32-3/4 35-3/8 50-9/16 36-3/16** 42-3/8	32-1/4 34-7/8 50-1/16 35-3/4 42-3/8	32-1/4 34-11/16 50-1/16 35-3/4 42	32-1/4 34-7/8 50-1/16 35-3/4 42-3/8	32-1/4 34-11/16 50-1/16 35-3/4 42	
Case depth without door(in.) C † Case depth less door handle (in.) D† Case depth with door handle (in.) E† Depth wifresh food door open 90°(in.) F † Width (in.) G Width wi/door open 90° widdor handle (in.) H Air clearances Each side (in.)	68-3/4 28 33-9/16 36 50-1/16 35-3/4 45-1/2 1/8	28 33-9/16 36 50-1/16 35-3/4 45-1/2 1/8	28 32-1/4 34-7/8 50-1/16 35-3/4 42-3/8 1/8	32-3/4 35-3/8 50-9/16 36-3/16** 42-3/8 1/8	32-1/4 34-7/8 50-1/16 35-3/4 42-3/8 1/8	32-1/4 34-11/16 50-1/16 35-3/4 42 1/8	32-1/4 34-7/8 50-1/16 35-3/4 42-3/8 1/8	32-1/4 34-11/16 50-1/16 35-3/4 42 1/8	
Case depth without door(in.) C † Case depth less door handle (in.) D† Case depth with door handle (in.) E† Depth w/fresh food door open 90°(in.) F † Width (in.) G Width w/door open 90° w/door handle (in.) H Air clearances Each side (in.) Top (in.)	68-3/4 28 33-9/16 36 50-1/16 35-3/4 45-1/2	28 33-9/16 36 50-1/16 35-3/4 45-1/2 1/8 1	28 32-1/4 34-7/8 50-1/16 35-3/4 42-3/8	32-3/4 35-3/8 50-9/16 36-3/16** 42-3/8	32-1/4 34-7/8 50-1/16 35-3/4 42-3/8	32-1/4 34-11/16 50-1/16 35-3/4 42 1/8 1	32-1/4 34-7/8 50-1/16 35-3/4 42-3/8	32-1/4 34-11/16 50-1/16 35-3/4 42 1/8 1	
Case depth without door(in.) C † Case depth less door handle (in.) D† Case depth with door handle (in.) E† Depth w/fresh food door open 90°(in.) F † Width (in.) G Width w/door open 90° w/door handle (in.) H Air clearances Each side (in.) Top (in.) Back (in.)	68-3/4 28 33-9/16 36 50-1/16 35-3/4 45-1/2 1/8 1 1	28 33-9/16 36 50-1/16 35-3/4 45-1/2 1/8 1 1	28 32-1/4 50-1/16 35-3/4 42-3/8 1/8 1 1	32-3/4 35-3/8 50-9/16 36-3/16** 42-3/8 1/8 1 1	32-1/4 34-7/8 50-1/16 35-3/4 42-3/8 1/8 1 1	32-1/4 34-11/16 50-1/16 35-3/4 42 1/8 1 1	32-1/4 34-7/8 50-1/16 35-3/4 42-3/8 1/8 1 1	32-1/4 34-11/16 50-1/16 35-3/4 42 1/8 1 1	
Case depth without door(in.) C † Case depth less door handle (in.) D† Case depth with door handle (in.) E† Depth w/fresh food door open 90°(in.) F † Width (in.) G Width w/door open 90° w/door handle (in.) H Air clearances Each side (in.) Top (in.)	68-3/4 28 33-9/16 36 50-1/16 35-3/4 45-1/2 1/8 1	28 33-9/16 36 50-1/16 35-3/4 45-1/2 1/8 1	28 32-1/4 34-7/8 50-1/16 35-3/4 42-3/8 1/8 1	32-3/4 35-3/8 50-9/16 36-3/16** 42-3/8 1/8 1	32-1/4 34-7/8 50-1/16 35-3/4 42-3/8 1/8 1	32-1/4 34-11/16 50-1/16 35-3/4 42 1/8 1	32-1/4 34-7/8 50-1/16 35-3/4 42-3/8 1/8 1	32-1/4 34-11/16 50-1/16 35-3/4 42 1/8 1 1 360	
Case depth without door(in.) C † Case depth less door handle (in.) D† Case depth with door handle (in.) E† Depth w/fresh food door open 90°(in.) F † Width (in.) G Width w/door open 90° w/door handle (in.) H Air clearances Each side (in.) Top (in.) Back (in.)	68-3/4 28 33-9/16 36 50-1/16 35-3/4 45-1/2 1/8 1 1 390	28 33-9/16 36 50-1/16 35-3/4 45-1/2 1/8 1 1 1 390	28 32-1/4 34-7/8 50-1/16 35-3/4 42-3/8 1/8 1 1 1 360	32-3/4 35-3/8 50-9/16 36-3/16** 42-3/8 1/8 1 1 390 	32-1/4 34-7/8 50-1/16 35-3/4 42-3/8 1/8 1 1 360 iz, 15Amps	32-1/4 34-11/16 50-1/16 35-3/4 42 1/8 1 1	32-1/4 34-7/8 50-1/16 35-3/4 42-3/8 1/8 1 1	32-1/4 34-11/16 50-1/16 35-3/4 42 1/8 1 1	

*Color(s) available: SS = Stainless steel, WW = White on white, WS = White with stainless-look handles, CC = Bisque on bisque, BB = Black on black. **Width excluding caps is 35-7/8". †Water hook-up fits in back air clearance when calculating installation depth.

White moves prime in back on consider the constraint constraints and the constraint of the constraint ALL MODELS AVAILABLE IN U.S. AND CANADA. Energy information available at www.ge.com

 PSS26SGR PSS23SGS	PSS26NGS PSS23NGS	PSW26MSR	PSS26MSR PSS23MSS	PSS26MGS PSS23MGS	PSS26LSR PSS23LSS	PSS26LGS PSS23LGS
•		•	•		•	
25.5 / 22.6	25.5 / 22.6	25.0	25.6 / 22.6	25.6 / 22.6	25.6./22.6	25.6./22.6
 25.5/22.6	25.5/22.6	25.6	25.6 / 22.6	25.6 / 22.6	25.6/22.6	25.6 / 22.6
16.02 / 16.0	16.02 / 16.0 9.48 / 6.6	16.02	16.02 / 16.0	16.02 / 16.0	16.02 / 16.0	16.02 / 16.0
9.48 / 6.6 23.7 / 23.8	9.48 / 6.6	9.48	9.48 / 6.6	9.48 / 6.6	9.6 / 6.6	9.6 / 6.6
23.7723.8	23.7723.8	23.8	23.8	23.8	23.8	23.8
					1	
•	•	•	•	•		
•	•	•	•	•		
•	•	•	•	•		
•	•	•	•	•		
-	-					
•	•	•	•	•	•	•
•	•	٠	•	٠	•	•
•	•	٠	•	٠	•	•
Plus	Plus	Plus	Plus	Plus	Plus	Plus
Crushed ice,	Crushed ice,	Crushed ice,	Crushed ice,	Crushed ice,	Crushed ice,	Crushed ice,
cubes, water	cubes, water	cubes, water	cubes, water	cubes, water	cubes, water	cubes, water
•	•	٠	•	٠	•	•
 •	•	•	•	•	•	•
 •	•	٠	•	٠	•	•
 •	•	٠	•	٠	•	•
•	•	•	•	•	•	•
3 glass	3 glass	3 glass	3 glass	3 glass	3 glass	3 glass
 3	3	3	3	3	3	3
2	2	2	2	2	2	2
 •	•	•	•	•	•	•
•	•	•	•	•	•	•
 2	2	2	2	2		
 •	•	•	•	•	•	•
 Adj. temp.	Adj. temp.	Adj. temp.	Adj. temp.	Adj. temp.	•	•
 Adj. humidity	Adj. humidity	Adj. humidity	Adj. humidity	Adj. humidity	Adj. humidity	Adj. humidity
CustomCool	CustomCool		- II	- II		
w/full-extension	w/full-extension	Full-extension	Full-extension	Full-extension	• (7	(7 and 1)
4 (3 adj.)	4 (3 adj.)	4 (3 adj.)	4 (3 adj.)	4 (3 adj.)	4 (3 adj.)	4 (3 adj.)
 La di su di su	La Alice de con		Un Alexandreau	La Alexa de ca		Mensional
In-the-door Tri-level	In-the-door Tri-level	In-the-door Dual-level	In-the-door Dual-level	In-the-door Dual-level	Wine rack Dual-level	Wine rack Dual-level
 Premium		Premium			Premium	Premium
	Premium	e	Premium	Premium	● Premium	•
						-
•	•					
	•	•	•	•	•	٠
•	•	•				
•		•	•	•		•
•	•	•	•	•	•	•
• • • • • • • •	• • 4 (3 full-ext.)	• • 3	• • 3	• • 3	• • 3	•
• • • • • • • • • • • • • • • • • • •	• • 4 (3 full-ext.) 2	• • 3 2	• • 3 2	• • 3 2	•	•
• • • • • • • •	• • 4 (3 full-ext.)	• • 3	• • 3	• • 3	• • 3 2	• • 3 2
4 (3 full-ext.) 2 3 (2 adj.)	• • 4 (3 full-ext.) 2 3 (2 adj.)	• • 3 2 3 (2 adj.)	• • 3 2 3 (2 adj.)	• 3 2 3 (2 adj.)	• • 3	•
4 (3 full-ext.) 2 3 (2 adj.) 1	• 4 (3 full-ext.) 2 3 (2 adj.) 1	• 3 2 3 (2 adj.) 1		• 3 2 3 (2 adj.) 1		• 3 2 3 (2 adj.)
4 (3 full-ext.) 2 3 (2 adj.) 1	• 4 (3 full-ext.) 2 3 (2 adj.) 1	• 3 2 3 (2 adj.) 1		• 3 2 3 (2 adj.) 1		• 3 2 3 (2 adj.)
4 (3 full-ext.) 2 3 (2 adj.) 1 Dual	• 4 (3 full-ext.) 2 3 (2 odj.) 1 Dual	• 3 2 3 (2 adj.) 1 Dual		• 3 2 3 (2 adj.) 1 Dual	3 2 3 (2 adj.) Dual	• 3 2 3 (2 adj.) Dual
4 (3 full-ext.) 2 3 (2 adj.) 1 Dual	• 4 (3 full-ext.) 2 3 (2 adj.) 1 Dual WW, CC, BB	• 3 2 3 (2 adj.) 1 Dual SS		• 3 2 3 (2 adj.) 1 Dual WW, CC, BB		• • 3 2 3 (2 adj.) Dual WW, CC, BB
4 (3 full-ext.) 2 3 (2 adj.) 1 Dual SS Sculptured stainless steel	• 4 (3 full-ext.) 2 3 (2 adj.) 1 Dual WW, CC, BB Color-matched				S Sculptured stainless steel	
4 (3 full-ext.) 2 3 (2 adj.) 1 Dual SS Sculptured stainless steel Contoured	• 4 (3 full-ext.) 2 3 (2 adj.) 1 Dual WW, CC, BB Color-matched				Contoured	
4 (3 full-ext.) 2 3 (2 adj.) 1 Dual SS Sculptured stainless steel Contoured Case only (black)	● 4 (3 full-ext.) 2 3 (2 adj.) 1 Dual WW, CC, BB Color-matched sculptured Contoured ●					Contoured
4 (3 full-ext.) 2 3 (2 adj.) 1 Dual SS Sculptured stainless steel Contoured					Contoured	Contoured
4 (3 full-ext.) 2 3 (2 adj.) 1 Dual SS Sculptured stainless steel Contoured Case only (black) Front	(3 full-ext.) 2 3 (2 dj.) 1 Dual WW, CC, BB Color-matched sculptured Contoured • Front		Outer and the second seco	Contoured Front	S S Sculptured stainless steel Contoured Case only (black) Front	● 3 2 3 (2 adj.) Dual WW, CC, BB Color-matchee sculptured Contoured ● Front
4 (3 full-ext.) 2 3 (2 adj.) 1 Dual SS Sculptured stainless steel Contoured Case only (black) Front 69-1/4	(3 full-ext.) 2 3 (2 adj.) 1 Dual WW, CC, BB Color-matched sculptured Contoured Front front 69-1/4		O S S Sculptured stainless steel Contoured Case only (black) Front 69-1/4	A Scale of the second	Outer of the second secon	Contoured Front
4 (3 full-ext.) 2 3 (2 adj.) 1 Dual SS Sculptured stainless steel Contoured Case only (black) Front 69-1/4 68-3/4	• 4 (3 full-ext.) 2 3 (2 adj.) 1 Dual WW, CC, BB Color-matched sculptured Contoured • Front 69-1/4 68-3/4			• 3 2 3 (2 adj.) 1 Dual WW, CC, BB Color-matched sculptured Contoured • Front 69-1/4 68-3/4	SS Sculptured stainless steel Contoured Case only (black) Front 69-1/4 68-3/4	● 3 2 3 (2 adj.) Dual WW, CC, BB Color-matched sculptured Contoured ● Front 69-1/4 68-3/4
A (3 full-ext.) 2 3 (2 adj.) 1 Dual SS Sculptured stainless steel Contoured Case only (black) Front 69-1/4 68-3/4 28	●		• 3 3 2 3 (2 adj.) 1 Dual SS Sculptured stainless steel Contoured Case only (black) Front 69-1/4 68-3/4 28	• 3 2 3 (2 adj.) 1 Dual WW, CC, BB Color-matched sculptured Contoured • Front 69-1/4 68-3/4 28	O S S S Sculptured Stainless steel Contoured Case only (black) Front G9-1/4 68-3/4 28	A state of the state of th
A (3 full-ext.) 2 3 (2 adj.) 1 Dual SS Sculptured stainless steel Contoured Case only (black) Front 69-1/4 68-3/4 28 32-1/4	● 4 (3 full-ext.) 2 3 (2 ddj.) 1 Dual WW, CC, BB Color-matched sculptured Contoured ● Front 69-1/4 68-3/4 28 32-1/4			• 3 3 2 3 (2 adj.) 1 Dual WW, CC, BB Color-matched sculptured Contoured • Front 69-1/4 68-3/4 28 32-1/4		● 3 2 3 (2 adj.) Dual WW, CC, BB Color-matchere sculptured Contoured ● Front 69-1/4 68-3/4 28 32-1/4
A (3 full-ext.) 2 3 (2 adj.) 1 Dual SS Sculptured stainless steel Contoured Case only (black) Front 69-1/4 68-3/4 28	●			• 3 2 3 (2 adj.) 1 Dual WW, CC, BB Color-matched sculptured Contoured • Front 69-1/4 68-3/4 28 32-1/4 34-11/16		A state of the state of th
((((● 4 (3 full-ext.) 2 3 (2 ddj.) 1 Dual WW, CC, BB Color-matched sculptured Contoured ● Front 69-1/4 68-3/4 28 32-1/4			• 3 2 3 (2 adj.) 1 Dual WW, CC, BB Color-matched sculptured Contoured • Front 69-1/4 68-3/4 28 32-1/4 34-11/16 50-1/16	● 3 2 3 (2 adj.) Dual SS Sculptured stainless steel Contoured Case only (black) Front 69-1/4 68-3/4 28 32-1/4 34-7/8 50-1/16	● 3 2 3 (2 adj.) Dual WW, CC, BB Color-matchere sculptured Contoured ● Front 69-1/4 68-3/4 28 32-1/4
(3 full-ext.) 2 3 (2 adj.) 1 Dual SS Sculptured stainless steel Contoured Case only (black) Front 69-1/4 68-3/4 28 32-1/4 34-7/8	● 4 (3 full-ext.) 2 3 (2 odj.) 1 Dual WW, CC, BB Color-matched sculptured Contoured ● Front 69-1/4 68-3/4 28 32-1/4 34-11/16			• 3 2 3 (2 adj.) 1 Dual WW, CC, BB Color-matched sculptured Contoured • Front 69-1/4 68-3/4 28 32-1/4 34-11/16		• 3 2 3 (2 adj.) Dual WW, CC, BB Color-matched sculptured Contoured • Front 69-1/4 68-3/4 28 32-1/4 34-11/16 50-1/16
(3 full-ext.) 2 3 (2 adj.) 1 Dual SS Sculptured stainless steel Contoured Case only (black) Front 69-1/4 68-3/4 28 32-1/4 34-7/8 50-1/16 35-3/4 / 32-3/4	●	• • 3 2 3 (2 adj.) 1 Dual SS Sculptured stainless steel Full-wrap contoured Front 70-1/2†† 70-1/2 28-1/2 32-3/4 35-3/16 50-9/16 36-3/16**	• • 3 2 3 (2 adj.) 1 Dual SS Sculptured stainless steel Contoured Case only (black) Front 69-1/4 68-3/4 28 32-1/4 34-7/8 50-1/16 35-3/4 / 32-3/4	● 3 3 2 3 (2 adj.) 1 Dual WW, CC, BB Color-matched sculptured Contoured ● Front 69-1/4 68-3/4 28 32-1/4 34-11/16 50-1/16 35-3/4 / 32-3/4		● 3 2 3 (2 adj.) Dual WW, CC, BB Color-matchece sculptured Contoured ● Front 69-1/4 68-3/4 28 32-1/4 34-11/16 50-1/16 50-1/16 35-3/4 / 32-3/4
((((● ● 4 (3 full-ext.) 2 3 (2 adj.) 1 Dual WW, CC, BB Color-matched sculptured Contoured ● Front 69-1/4 68-3/4 28 32-1/4 34-11/16 50-1/16			• 3 2 3 (2 adj.) 1 Dual WW, CC, BB Color-matched sculptured Contoured • Front 69-1/4 68-3/4 28 32-1/4 34-11/16 50-1/16	● 3 2 3 (2 adj.) Dual SS Sculptured stainless steel Contoured Case only (black) Front 69-1/4 68-3/4 28 32-1/4 34-7/8 50-1/16	• 3 2 3 (2 adj.) Dual WW, CC, BB Color-matched sculptured Contoured • Front 69-1/4 68-3/4 28 32-1/4 34-11/16 50-1/16
(3 full-ext.) 2 3 (2 adj.) 1 Dual SS Sculptured stainless steel Contoured Case only (black) Front 69-1/4 68-3/4 28 32-1/4 34-7/8 50-1/16 35-3/4 / 32-3/4	●	• • 3 2 3 (2 adj.) 1 Dual SS Sculptured stainless steel Full-wrap contoured Front 70-1/2†† 70-1/2 28-1/2 32-3/4 35-3/16 50-9/16 36-3/16**		● 3 3 2 3 (2 adj.) 1 Dual WW, CC, BB Color-matched sculptured Contoured ● Front 69-1/4 68-3/4 28 32-1/4 34-11/16 50-1/16 35-3/4 / 32-3/4		● 3 2 3 (2 adj.) Dual WW, CC, BB Color-matchece sculptured Contoured ● Front 69-1/4 68-3/4 28 32-1/4 34-11/16 50-1/16 50-1/16 35-3/4 / 32-3/4
(((● ● 4 (3 full-ext.) 2 3 (2 adj.) 1 Dual WW, CC, BB Color-matched sculptured Contoured ● Front 69-1/4 68-3/4 28 32-1/4 32-1/4 32-1/4 32-1/4 32-1/4 34-11/16 50-1/16 35-3/4 / 32-3/4 42 / 40-1/2			● 3 2 3 (2 adj.) 1 Dual WW, CC, BB Color-matched sculptured Contoured ● Front 69-1/4 68-3/4 28 32-1/4 34-11/16 50-1/16 35-3/4/32-3/4 42/40-1/2		● 3 2 3 (2 adj.) Dual WW, CC, BB Color-matchec sculptured Contoured ● Front 69-1/4 68-3/4 28 32-1/4 34-11/16 50-1/16 35-3/4 / 32-3/4 42 / 40-1/2
(3 full-ext.) 2 3 (2 adj.) 1 Dual SS Sculptured stainless steel Contoured Case only (black) Front 69-1/4 68-3/4 28 32-1/4 34-7/8 50-1/16 35-3/4 / 32-3/4 42-3/8 / 40-3/4 1/8	● ● 4 (3 full-ext.) 2 3 (2 adj.) 1 Dual WW, CC, BB Color-matched sculptured Contoured ● Front 69-1/4 68-3/4 28 32-1/4 34-11/16 50-1/16 35-3/4 / 32-3/4 42 / 40-1/2 1/8		● 3 3 2 3 (2 adj.) 1 Dual SS Sculptured stainless steel Contoured Case only (black) Front 69-1/4 68-3/4 28 32-1/4 34-7/8 50-1/16 35-3/4 / 32-3/4 42-3/8 / 40-3/4 1/8	● 3 2 3 (2 adj.) 1 Dual WW, CC, BB Color-matched sculptured Contoured ● Front 69-1/4 68-3/4 28 32-1/4 34-11/16 50-1/16 35-3/4 / 32-3/4 42 / 40-1/2 1/8	● 3 3 2 3 (2 adj.) Dual SS Sculptured stainless steel Contoured Case only (black) Front 69-1/4 68-3/4 28 32-1/4 34-7/8 50-1/16 35-3/4 / 32-3/4 42-3/8 / 40-3/4 1/8	● 3 2 3 (2 adj.) Dual WW, CC, BB Color-matchea sculptured Contoured ● Front 69-1/4 68-3/4 28 32-1/4 28 32-1/4 34-11/16 50-1/16 35-3/4 / 32-3/4 42 / 40-1/2 1/8

Side-by-side refrigerators






GE[®] side-by-side refrigerators

	GE "X" Series		GE "K" Series	CEEDEWCC	GE "J" Series	CCI 25 150	CC1125.150	CCC25 152
	GSS25XSR	GSF25XGR	GSS25SGS GSS23SGS	GSS25KGS GSS23KGS	GSH25JSR GSH22JSR	GSL25JFR GSL22JFR	GSH25JFR GSH22JFR	GSS25JER GSS22JER
tainless steel model	03323A3K	03123701	•	03323103	03112233K	GSEZZJIK	GSHZZJIK	GSSZZJEK
Capacity								1
otal (cu. ft.)	25.4	25.4	25.0 / 22.6	25.0 / 22.6	25.0 / 22.0	25.0 / 22.0	25.0 / 22.0	25.0 / 22.0
resh food (cu. ft.)	15.9	15.9	15.40 / 16.0	15.40 / 6.0	15.48 / 14.84	15.48 / 14.84	15.40 / 14.84	15.40 / 14.8
Freezer (cu. ft.)	9.49	9.49	9.56 / 6.6	9.56 / 6.6	9.56 / 7.14	9.56/ 7.14	9.56 / 7.14	9.56 / 7.14
Shelf area (sq. ft.)	22.9	22.9	24.3 / 23.7	24.3 / 23.7	22.3 / 20.3	22.3 / 20.3	22.3 / 20.3	22.3 / 20.3
Fresh food features								
SmartWater™ filtration system	Plus	Plus	Plus	Plus	•	•	•	
	Crushed ice,	Crushed ice,	Crushed ice,	Crushed ice,	Crushed ice,	Crushed ice,	Crushed ice,	Crushed ice
ightTouch! dispenser features	cubes, water	cubes, water	cubes, water	cubes, water	cubes, water	cubes, water	cubes, water	cubes, wate
Light	•	•	•	٠	•	•	•	•
Child lock	•	•	•	•	•	•	•	
Water filter indicator light	•	•	•	•				
Jpfront electronic touch								
emperature controls	•	•	•	•				
Jpfront electronic temperature controls	•	•	•	•	Dial	Dial	Dial	Dial
Cabinet shelves	3 glass	3 glass	3 glass	3 glass	3 glass	3 glass	3 glass	3 glass
Adjustable	3	3	3	3	3	3	3	3
Slide-out	3	3	3	3	3	3	3	3
Spillproof	3	3	3	3	3	3	3	3
ntegrated shelf support system	•	•	•	•				
Snugger™ clip			1	1				ļ
3-stack drawer system	•	•						
Deli drawer	•	•						
Vegetable/fruit crisper	1 adj. humidity	1 adj. humidity						
Sealed pan	•	•						
2-stack drawer system			•	•	•	•	•	•
Deli drawer			1 adj. temp.	1 adj. temp.	1 adj. temp.	1 adj. temp.	1 adj. temp.	1 adj. temp
Vegetable/fruit crisper	ļ!		1 adj. humidity	1 adj. humidity	1 adj. humidity	1 adj. humidity	1 adj. humidity	1 sealed
Snack pan			•	•	•			
	4 (3 adj. with	4 (3 adj. with	4 (2 adj. with	4 (2 adj. with	4 (2 adj. with	4 (2 adj. with	4 (2 adj. with	4 (2 adj. wit
Adjustable door bins	gallon storage)	gallon storage)	gallon storage)	gallon storage)	gallon storage)	gallon storage)	gallon storage)	gallon storag
Dairy compartment	•	•	•	•	•	•	•	•
nterior light system	Dual-level	Dual-level	Dual-level	Dual-level	Dual-level	Dual-level	Dual-level	Single-leve
Quiet Design	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe
NeverClean™ condenser	•	•	•	•	•	•	•	•
NERGY STAR®	•	•	•	•	•	•	•	
Freezer features								
actory-installed icemaker and bin	Integrated	Integrated	•	•	•	•	•	•
rostGuard™ technology	•	•	•	•	•	•	•	•
Vire cabinet shelves	2	2	4 (3 adj.)	4 (3 adj.)	4 (3 adj.)	4 (3 adj.)	4 (3 adj.)	4 (3 adj.)
Storage basket(s)	1 slide-out	1 slide-out	1 slide-out	1 slide-out	1 bin	1 bin	1 bin	1 bin
Door shelves	3 (2 adj.)	3 (2 adj.)	5	5	5	5	5	5
nterior light	•	•	•	•	•	•	•	•
Appearance								
Color(s) available*	SS	WW, CC, BB	SS	WW, CC, BB	SS	CleanSteel	WW, CC, BB	WW, CC, BE
			Stainless steel	CM promium	Staiplace steel	Black	CM premium	CM premiur
Deluxe door handle(s)*	Stainless steel	CM premium	Stainless steel	CM premium	Stainless steel	Dideit		
	Stainless steel	High-gloss						
Deluxe door handle(s)* Exterior design	Stainless steel Rounded doors	High-gloss rounded doors	Rounded doors	Rounded doors	Rounded doors	Rounded doors	Rounded doors	Rounded doo
Deluxe door handle(s)* Exterior design Extured steel door and case	Stainless steel Rounded doors Case only (black)	High-gloss rounded doors Case only	Rounded doors Case only (black)	Rounded doors	Rounded doors Case only (black)	Rounded doors Case only (black)	Rounded doors	•
Deluxe door handle(s)* Exterior design Textured steel door and case Adjustable rollers	Stainless steel Rounded doors	High-gloss rounded doors	Rounded doors	Rounded doors	Rounded doors	Rounded doors	Rounded doors	
Deluxe door handle(s)* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions	Stainless steel Rounded doors Case only (black) Front	High-gloss rounded doors Case only Front	Rounded doors Case only (black) Front	Rounded doors Front	Rounded doors Case only (black) Front	Rounded doors Case only (black) Front	Rounded doors Front	• Front
Deluxe door handle(s)* Exterior design Textured steel door and case Adjustable rollers	Stainless steel Rounded doors Case only (black) Front 69-1/4	High-gloss rounded doors Case only Front 69-1/4	Rounded doors Case only (black) Front 69-1/4	Rounded doors Front 69-1/4	Rounded doors Case only (black) Front 69-3/4 / 67-1/2	Rounded doors Case only (black) Front 69-3/4 / 67-1/2	Rounded doors • Front 69-3/4 / 67-1/2	Front 69-3/4 / 67-1
Deluxe door handle(s)* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions	Stainless steel Rounded doors Case only (black) Front	High-gloss rounded doors Case only Front	Rounded doors Case only (black) Front	Rounded doors Front	Rounded doors Case only (black) Front	Rounded doors Case only (black) Front	Rounded doors Front	Front 69-3/4 / 67-1
Deluxe door handle(s)* Exterior design extured steel door and case dijustable rollers Weights & Dimensions Height to top of hinge (in.) A	Stainless steel Rounded doors Case only (black) Front 69-1/4	High-gloss rounded doors Case only Front 69-1/4	Rounded doors Case only (black) Front 69-1/4	Rounded doors Front 69-1/4	Rounded doors Case only (black) Front 69-3/4 / 67-1/2	Rounded doors Case only (black) Front 69-3/4 / 67-1/2	Rounded doors • Front 69-3/4 / 67-1/2	Front 69-3/4 / 67-1
Deluxe door handle(s)* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B	Stainless steel Rounded doors Case only (black) Front 69-1/4 68-3/4	High-gloss rounded doors Case only Front 69-1/4 68-3/4	Rounded doors Case only (black) Front 69-1/4 68-3/4	Rounded doors • Front 69-1/4 68-3/4	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2	Rounded doors • Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2	Front 69-3/4 / 67-1 68-3/4 / 66-1
Deluxe door handle(s)* Exterior design extured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Case depth without door (in.) C†	Stainless steel Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16	High-gloss rounded doors Case only Front 69-1/4 68-3/4 28 31-1/4 33-9/16	Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16	Rounded doors Front 69-1/4 68-3/4 28 31-1/4 33-9/16	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2 28 31-1/4 33-9/16	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2 28 31-1/4 33-9/16	Rounded doors Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2 28 31-1/4 33-9/16	Front 69-3/4 / 67-1 68-3/4 / 66-1 28 31-1/4 33-9/16
Deluxe door handle(s)* Exterior design Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Case depth without door (in.) C† Case depth less door handle (in.) D†	Stainless steel Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4	High-gloss rounded doors Case only Front 69-1/4 68-3/4 28 31-1/4	Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4	Rounded doors Front 69-1/4 68-3/4 28 31-1/4	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2 28 31-1/4	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2 28 31-1/4	Rounded doors Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2 28 31-1/4	● Front 69-3/4 / 67-1 68-3/4 / 66-1 28 31-1/4
Deluxe door handle(s)* Exterior design Extured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Case depth without door (in.) C† Case depth less door handle (in.) D† Case depth with door handle (in.) E†	Stainless steel Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16	High-gloss rounded doors Case only Front 69-1/4 68-3/4 28 31-1/4 33-9/16	Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16	Rounded doors Front 69-1/4 68-3/4 28 31-1/4 33-9/16	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2 28 31-1/4 33-9/16	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2 28 31-1/4 33-9/16	Rounded doors Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2 28 31-1/4 33-9/16	Front 69-3/4 / 67-1 68-3/4 / 66-1 28 31-1/4 33-9/16 49-3/8
Deluxe door handle(s)* Exterior design extured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Case depth without door (in.) C† Case depth less door handle (in.) D† Case depth less door handle (in.) E†	Stainless steel Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4	High-gloss rounded doors Case only Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16	Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16	Rounded doors Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2 28 31-1/4 33-9/16 49-3/8	Rounded doors Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16	Front 69-3/4 / 67-1 68-3/4 / 66-3 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1 38-3/16
Deluxe door handle(s)* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Tase depth without door (in.) C† Case depth without door (in.) C† Case depth with door handle (in.) C† Case depth with door handle (in.) E† Depth with fresh food door open 90° (in.) F† Width (in.) G Width w/door open 90° with	Stainless steel Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16	High-gloss rounded doors Case only Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16	Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 / 32-3/4	Rounded doors Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4/32-3/4	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2	Rounded doors Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2	Front 69-3/4 / 67-1 68-3/4 / 66-1 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1
Deluxe door handle(s)* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Case depth without door (in.) C† Case depth less door handle (in.) D† Case depth with door handle (in.) E† Depth with fresh food door open 90° (in.) F† Width (in.) G	Stainless steel Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4	High-gloss rounded doors Case only Front 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4	Rounded doors Case only (black) Front 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 / 32-3/4 38-9/16	Rounded doors Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 / 32-3/4 38-9/16	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16	Rounded doors Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16	Front 69-3/4 / 67-1 68-3/4 / 66-1 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1 38-3/16
Deluxe door handle(s)* Exterior design extured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A deight to top of case (in.) B Case depth without door (in.) C† Case depth less door handle (in.) D† Case depth with door handle (in.) E† Depth with fresh food door open 90° (in.) F† Width (in.) G Width w/door open 90° with door handle (in.) H	Stainless steel Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 36-1/4	High-gloss rounded doors Case only Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 36-1/4	Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 / 32-3/4 38-9/16 35-7/16	Rounded doors Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 / 32-3/4 38-9/16 35-7/16	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2 28 31-11/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16	Rounded doors Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16	Front 69-3/4/67-1 68-3/4/66-1 28 31-1/4 33-9/16 49-3/8 35-3/4/33-1 38-3/16 35-15/16
Deluxe door handle(s)* Exterior design Extured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Case depth without door (in.) C† Case depth without door handle (in.) D† Case depth with door handle (in.) E† Depth with fresh food door open 90° (in.) F† Width (in.) G Width w/door open 90° with Ioor handle (in.) H Each side (in.) Top (in.) Air clearances Back (in.)	Stainless steel Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 36-1/4 1/8	High-gloss rounded doors Case only Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 36-1/4 1/8	Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4/32-3/4 38-9/16 35-7/16 1/8	Rounded doors Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 / 32-3/4 38-9/16 35-7/16 1/8	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 53-15/16 1/8	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16 1/8 1 1	Rounded doors • Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16 1/8	Front 69-3/4 / 67-1 68-3/4 / 66-3 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1 38-3/16 35-15/16 1/8 1 1 1
beluxe door handle(s)* Exterior design Extured steel door and case Extured steel for the steel door and case Extured steel for the steel door (in.) A External to top of hinge (in.) A External to top of case (in.) B External to top of case (in.) B External to top of a case (in.) Cf External to top of a case (in.) H External to top of a case (in.) External to top of	Stainless steel Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 36-1/4 1/8 1	High-gloss rounded doors Case only Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/4 35-3/4 36-1/4 1/8 1	Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4/32-3/4 38-9/16 35-7/16 1/8 1	Rounded doors Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4/32-3/4 38-9/16 35-7/16 1/8 1	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16 1/8 1	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16 1/8 1	Rounded doors Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16 1/8 1	Front 69-3/4/67-1 68-3/4/66-1 28 31-1/4 33-9/16 49-3/8 35-3/4/33-1 38-3/16 35-15/16 1/8 1
Deluxe door handle(s)* Exterior design Exterior design Extract design Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Case depth without door (in.) C† Case depth without door (in.) D† Case depth with door handle (in.) D† Case depth with door handle (in.) E† Depth with fresh food door open 90° (in.) F† Width (in.) G Width w/door open 90° with Loor handle (in.) H Each side (in.) Top (in.) Air clearances Back (in.) Spprox. shipping weight (lbs.)	Stainless steel Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 36-1/4 1/8 1 1	High-gloss rounded doors Case only Front 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 36-1/4 1/8 1 1	Rounded doors Case only (black) Front 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 / 32-3/4 38-9/16 35-7/16 1/8 1 1	Rounded doors Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 / 32-3/4 38-9/16 35-7/16 1/8 1 290 / 270	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16 1/8 1 1	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16 1/8 1 1	Rounded doors Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16 1/8 1 1 1	Front 69-3/4 / 67-1 68-3/4 / 66-3 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-3 38-3/16 35-15/16 1/8 1 1 1
Deluxe door handle(s)* Exterior design Textured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Case depth without door (in.) C† Case depth with door handle (in.) D† Case depth with door handle (in.) E† Width (in.) G Width w/door open 90° with Hoor handle (in.) H Each side (in.) Top (in.)	Stainless steel Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 36-1/4 1/8 1 1 391 ◀	High-gloss rounded doors Case only Front 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 36-1/4 1/8 1 1 1 391	Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4/32-3/4 38-9/16 33-7/16 1/8 1 1 290/270	Rounded doors Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 / 32-3/4 38-9/16 35-7/16 1/8 1 1 1 290 / 270 -120V, 60H	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16 1/8 1 1 344/ 323 z, 15Amps	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16 1/8 1 1 1 344/323	Rounded doors Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16 1/8 1 1 1	Front 69-3/4 / 67-1 68-3/4 / 66-3 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-3 38-3/16 35-15/16 1/8 1 1 1
Deluxe door handle(s)* Exterior design Extured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Case depth without door (in.) C† Case depth without door (in.) C† Case depth without door open 90° (in.) F† Width (in.) G Width widoor open 90° with Idoor handle (in.) H Each side (in.) Approx. shipping weight (lbs.) Prover/Ratings Color(s) available: SS = Stainless steel, WW = WH	Stainless steel Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 36-1/4 1 1 1 391 ◄	High-gloss rounded doors Case only Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 50-1/16 35-3/4 36-1/4 1 1 1 1 391 sque on bisque, BB= on depth.	Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 / 32-3/4 38-9/16 35-7/16 1/8 1 1 290 / 270 Black on black, Clec	Rounded doors Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 / 32-3/4 38-9/16 35-7/16 1/8 1 290 / 270 	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16 1/8 1 1 344 / 323 z, 15Amps ppearance, CM = Col	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16 1/8 1 1 1 344/323	Rounded doors Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16 1/8 1 1 1	Front 69-3/4 / 67-1 68-3/4 / 66-3 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-3 38-3/16 35-15/16 1/8 1 1 1
beluxe door handle(s)* xterior design extured steel door and case extured steel door and case digustable rollers Weights & Dimensions leight to top of hinge (in.) A leight to top of case (in.) B case depth without door (in.) C† case depth without door (in.) C† case depth with door handle (in.) D† case depth with door handle (in.) E† Vidth (in.) G Vidth w/door open 90° with loor handle (in.) Each side (in.) Top (in.) ir clearances Back (in.) pprox. shipping weight (lbs.) color/Ratings Color(s) available: S5 = Stainless steel, WW = WW Water hook-up fits in back air clearance when d installed against a wall, allow clearance of 10-	Stainless steel Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 36-1/4 1/8 1 1 391 ◀ (C = Bit calculating installatic (X ⁴ on 20 cu. ft. and	High-gloss rounded doors Case only Front 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 36-1/4 1/8 1 1 1 391 sque on bisque, BB= in depth. 22 cu. ft. models; 14	Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16 35-3/4 / 32-3/4 38-9/16 35-7/16 1/8 1 1 290 / 270 Elack on black, Cleo -3/16° on 25 cu. ft. m	Rounded doors Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 / 32-3/4 38-9/16 35-7/16 1/8 1 1 1 290 / 270 120V, 60H anSteel = Stainless a nodels on freezer sid	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16 1 1 344 / 323 z, 15Amps ppearance, CM = Col e to remove bin.	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16 1/8 1 1 1 344/323	Rounded doors Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16 1/8 1 1 1	Front 69-3/4 / 67- 68-3/4 / 66- 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33- 38-3/16 35-15/16 1/8 1 1 1
eluxe door handle(s)* xterior design extured steel door and case djustable rollers Weights & Dimensions leight to top of hinge (in.) A leight to top of case (in.) B case depth without door (in.) C† case depth without door (in.) C† case depth with door handle (in.) D† case depth with door handle (in.) F† vidth (in.) G Vidth w/door open 90° with oor handle (in.) Each side (in.) pprox. shipping weight (lbs.) ower/Ratings Color(s) available: S5 = Stainless steel, WW = WW Water hook-up fits in back air clearance when a installed against a wall, allow clearance of 10-	Stainless steel Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 36-1/4 1/8 1 1 391 ◀ (C = Bit calculating installatic (X ⁴ on 20 cu. ft. and	High-gloss rounded doors Case only Front 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 36-1/4 1/8 1 1 1 391 sque on bisque, BB= in depth. 22 cu. ft. models; 14	Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16 35-3/4 / 32-3/4 38-9/16 35-7/16 1/8 1 1 290 / 270 Elack on black, Cleo -3/16° on 25 cu. ft. m	Rounded doors Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 / 32-3/4 38-9/16 35-7/16 1/8 1 1 1 290 / 270 120V, 60H anSteel = Stainless a nodels on freezer sid	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16 1 1 344 / 323 z, 15Amps ppearance, CM = Col e to remove bin.	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16 1/8 1 1 1 344/323	Rounded doors Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16 1/8 1 1 1	Front 69-3/4 / 67- 68-3/4 / 66- 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33- 38-3/16 35-15/16 1/8 1 1 1
beluxe door handle(s)* Exterior design Extured steel door and case Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Case depth with door (in.) C† Case depth with door handle (in.) D† Case depth with door handle (in.) D† Vidth (in.) G Width (in.) G Width w/door open 90° with loor handle (in.) H Each side (in.) Top (in.) Sir clearances Back (in.) Approx. shipping weight (lbs.) Weight dings Color(s) available: SS = Stainless steel, WW = WH	Stainless steel Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 36-1/4 1/8 1 1 391 ◀ 4 301 ◀ 1 1 391 ◀ 1 1 1 3/4 on 20 cu. ft. and ze pan without disass	High-gloss rounded doors Case only Front 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 36-1/4 1/8 1 1 1 391 sque on bisque, BB= in depth. 22 cu. ft. models; 14	Rounded doors Case only (black) Front 69-1/4 68-3/4 28 31-1/4 33-9/16 35-3/4 / 32-3/4 38-9/16 35-7/16 1/8 1 1 290 / 270 Elack on black, Cleo -3/16° on 25 cu. ft. m	Rounded doors Front 69-1/4 68-3/4 28 31-1/4 33-9/16 50-1/16 35-3/4 / 32-3/4 38-9/16 35-7/16 1/8 1 1 1 290 / 270 120V, 60H anSteel = Stainless a nodels on freezer sid	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 68-3/4 / 66-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16 1 1 344 / 323 z, 15Amps ppearance, CM = Col e to remove bin.	Rounded doors Case only (black) Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16 1/8 1 1 1 344/323	Rounded doors Front 69-3/4 / 67-1/2 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1/2 38-3/16 35-15/16 1/8 1 1 1	Front 69-3/4 / 67-1 68-3/4 / 66-1 28 31-1/4 33-9/16 49-3/8 35-3/4 / 33-1 38-3/16 35-15/16 1/8 1 1 1


Side-by-side refrigerators





GSL25IFR GSS22IFR GSS20IFP GSS20IFF		GE "I" Series				GE "D" Series
Total [c., ft] 250 250/220 200 219/199 199 Freesh God(cu,ft) 15.48 15.48/14.84 12.37 12.87 7.287 Freesh God(cu,ft) 9.56 9.56/71.4 7.14 7.04 7.04 Shef area (sq, ft) 22.3 22.3/20.3 17.3 21.1/18.0 7.04 Shef area (sq, ft) 22.3 22.3/20.3 17.3 21.1/18.0 7.04 Shef area (sq, ft) 22.3 22.3/20.3 17.3 21.1/18.0 7.04 Shef area (sq, ft) 22.3 22.3/20.3 17.3 21.1/18.0 7.04 Shef area (sq, ft) 22.3 22.3/20.3 17.3 21.1/18.0 7.04 Shef area (sq, ft) 0				GSS20IEP		
Fresh food [ci, ft.] 15.48 15.48/14.84 12.87 14.87/12.87 12.87 Presert (ci, ft.) 9.56 9.56/7.14 71.4 70.6 70.4 Shelf area (sq, ft.) 22.3 22.3/20.3 17.3 21.1/18.0 18.1 Fresh food features	Capacity					
Freezer(cl, ft) 9.56 9.56/7.14 7.14 7.04 7.04 Shelf arcelsa, ft.) 22.3 22.3/2.3 17.3 21.1/18.0 18.1 SmartWater filtation system • • • • • SmartWater filtation system • • • • • Upfort electronic diatemperature controls • • • • • Spliproof 3 3 3 3 3 3 3 Spliproof 3 3 3 3 3 3 3 Deli drower 1 sealed <	Total (cu. ft.)	25.0	25.0 / 22.0	20.0	21.9 / 19.9	19.9
Shef area (s. ft.) 22.3 22.3 / 20.3 17.3 21.1 / 18.0 18.1 Fresh food features Crushed ice, cubes, water Crushed ice, cubes, water Cubes, water 17.3 21.1 / 18.0 18.1 Grushed ice, cubes, water Cubes, water Cubes, water 18.1 18.1 18.1 Upfnot electronic dial temperature controls •	Fresh food (cu. ft.)	15.48	15.48/14.84	12.87	14.87 / 12.87	12.87
Shef area (s. ft.) 22.3 22.3 / 20.3 17.3 21.1 / 18.0 18.1 Fresh food features Crushed ice, cubes, water Crushed ice, cubes, water Cubes, water 17.3 21.1 / 18.0 18.1 Grushed ice, cubes, water Cubes, water Cubes, water 18.1 18.1 18.1 Upfnot electronic dial temperature controls •	Freezer (cu. ft.)	9.56	9.56 / 7.14	7.14		7.04
Fresh food features Crushed ice, cubes, water Crushed ice, cubes, water Crushed ice, cubes, water Crushed ice, cubes, water Upfront electronic dial temperature controls • • • • Adjustable 3 3 3 3 3 Spillproof 3 3 3 3 3 3 Deli drower 1 sealed 1 sealed 1 sealed 1 sealed 1 sealed oppout 1 sealed 1 sealed oppout 0 single-level 0 pt. (MSSS)		22.3		17.3		18.1
SmartWater filtration system •						
Crushed ice, LightToucht dispenser features Crushed ice, cubes, water Crushed ice, cubes, water Crushed ice, cubes, water Upfort electronic dial temperature controls • <td></td> <td>•</td> <td>•</td> <td></td> <td></td> <td></td>		•	•			
Light ● <td></td> <td>Crushed ice.</td> <td>Crushed ice.</td> <td>Crushed ice.</td> <td></td> <td></td>		Crushed ice.	Crushed ice.	Crushed ice.		
Light ● <td>LightTouch! dispenser features</td> <td>cubes, water</td> <td>cubes, water</td> <td>cubes, water</td> <td></td> <td></td>	LightTouch! dispenser features	cubes, water	cubes, water	cubes, water		
Cabinet shelves 3 glass						
Cabinet shelves 3 glass		•	•	•	•	•
Adjustable 3 3 3 3 3 3 3 3 Spillproof 3 <td></td> <td>3 alass</td> <td>3 alass</td> <td>3 alass</td> <td>3 alass</td> <td>3 wire Everwhite</td>		3 alass	3 alass	3 alass	3 alass	3 wire Everwhite
Spillproof 3 3 1 1 Deli drower 1 sealed 1 sealed <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td></t<>						
Deli I sealed I sealed <thi i="" sealed<="" th=""> I sealed <</thi>				_	-	-
Vegetable/fruit crisper 1 sealed 1 seal		-	-	1 sealed	1 sealed	1 sealed opaque
Alg adj, with gallon storage 4 (2 adj, with gallon storage) Dairy compartment • • • • • Interior light system Single-level Single-level Single-level Single-level Single-level Single-level Deluxe						
Door bins gallon storage gallon stor	<u></u>					
Dairy compartment ●	Door bins					
Interior light system Single-level Single-level Single-level Single-level Single-level Single-level Single-level Single-level Single-level Deluxe Deluxe <thdecember d<="" td=""><td></td><td></td><td></td><td>•</td><td></td><td>- × ×</td></thdecember>				•		- × ×
Quiet Design Deluxe D		Single-level	Single-level	Single-level	Single-level	Single-level
NeverClean condenser • • • • Freezer features Freezer features • • Opt. (IMSSS) Opt. (IMSSS) FrostGuard technology • • • • • • FrostGuard technology • • • • • • Wire cabinet shelves 3 (2 adj.) 3 (2 adj.) 3 (2 adj.) 4 (3 adj.) 4 (3 adj.) Storage basket(s) 1 bin 1						
Freezer featuresFactory-installed icemaker and bin••Opt. (IM5SS)Opt. (IM5SS)FrostGuard technology•••••Wire cabinet shelves3 (2 adj.)3 (2 adj.)3 (2 adj.)4 (3 adj.)4 (3 adj.)Storage basketts)1 bin1 bin1 bin1 bin1 bin1 binDoor shelves556Interior light•••••AppearanceCleanSteelWW, CC, BBWW, CC, BBWW, CCWW, CCColor(s) available*CleanSteelWW, CC, BBWW, CC, BBWW, CCWW, CCDeluxe door handle(s)*BlackCMCMCMCMCadjustable rollersFrontFrontFrontFrontFrontHeight to top of fninge (in.) A69-3/469-3/4 / 67-1/267-1/267-1/266-1/2Case depth without door (in.) C†282828282828Case depth with door handle (in.) D†31-1/431-1/431-1/431-1/431-1/4Case depth with door nopen 90° (in.) F†49-3/849-3/847-3/847-3/847-3/847-3/8Width (in.) G35-3/435-3/4 / 35-3/4 / 33-1/231-1/233-15/1633-15/1633-15/1633-15/16With door handle (in.) H38-3/1635-3/4 / 35-15/1633-15/1633-15/1633-15/1633-15/1633-15/16With door handle (in.) H38-3/1635-3/4 / 33-12/231-1/2<						
Factory-installed icemaker and binOpt. (IMSSS)Opt. (IMSSS)Opt. (IMSSS)FrostGuard technology </td <td></td> <td></td> <td></td> <td><u> </u></td> <td>•</td> <td>-</td>				<u> </u>	•	-
FrostGuard technology ● <td></td> <td></td> <td></td> <td></td> <td>Opt (IM5SS)</td> <td>Opt (IM5SS)</td>					Opt (IM5SS)	Opt (IM5SS)
Instruction counting Image Imag						
Wire cabinet shelves $3 [2 adj.]$ $3 [2 adj.]$ $3 [2 adj.]$ $4 [3 adj.]$ $4 [3 adj.]$ Storage basket(s) 1 bin Door shelves 5 5 6 6 Interior light • • • • • Appearance • • • • • • Color(s) available* CleanSteel WW, CC, BB WW, CC WW, CC WW, CC Deluxe door handle(s)* Black CM CM CM CM Textured steel door and case Case only (black) • • • • Adjustable rollers Front Front Front Front Front Front C Height to top of hinge (in.) A 69-3/4 69-3/4 / 67-1/2 67-1/2 67-1/2 67-1/2 Case depth without door (in.) C† 28 28 28 28 28 28 28 28 28 28	riostadara technology	•	•	•	-	-
Storage basket(s) 1 bin 1 bin <td>Wire cabinet shelves</td> <td>3 (2 adi.)</td> <td>3 (2 adi)</td> <td>3 (2 adi)</td> <td></td> <td>(1 (3 adi.)</td>	Wire cabinet shelves	3 (2 adi.)	3 (2 adi)	3 (2 adi)		(1 (3 adi.)
Door shelves 5 5 6 Interior light ● </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
Interior light ●		1 DIT	TOIL			
Appearance Color(s) available* CleanSteel WW, CC, BB WW, CC, BB WW, CC W CC CA						
Color(s) available* CleanSteel WW, CC, BB WW, CC, BB WW, CC WW, CC Deluxe door handle(s)* Black CM CG GF:1/2		, , , , , , , , , , , , , , , , , , ,	•	•	•	•
Deluxe door handle(s)* Black CM CM CM CM CM Textured steel door and case Case only (black) •		ClassChael	WWW.CC. DD	MAN CC DD		MANI CC
Textured steel door and case Case only (black) ● ● ● ● Adjustable rollers Front						
Adjustable rollers Front Front <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
Weights & Dimensions 69-3/4 69-3/4/67-1/2 67-1/2 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
Height to top of hinge (in.) A 69-3/4 69-3/4 / 67-1/2 66-1/2 67-1/2 67-1/2 67-1/2 67-1/2 67-1/2 67-1/2 67-1/2 67-1/2 <		FIOIIL	FIOIIL	FIOIL	FIOIL	FIOIL
Height to top of case (in.) B 68-3/4 68-3/4/66-1/2 66-1/2 66-1/2 66-1/2 Case depth without door (in.) C† 28		co 7//	60 7/4 / 67 1/2	(7.1/2	67.1/2	(7.1/2
Cose depth without door (in.) C† 28 28 28 28 28 28 28 Case depth without door fin.) C† 31-1/4 31-1/2						
Case depth less door handle (in.) D† 31-1/4 31-1/2 3						
Case depth with door handle (in.) Et 33-9/16 33-12/2 31-1/2						
Each side (in.) 1 4 9-3/8 49-3/8 49-3/8 49-3/8 49-3/8 47-3/8 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
Width (in.) G 35-3/4 35-3/4/33-1/2 31-1/2 33-1/2/31-1/2 31-1/2 Width (in.) G 35-3/4 35-3/4/33-1/2 31-1/2 31-1/2 31-1/2 31-1/2 Width (in.) G 38-3/16 38-3/16 33-15/16 35-15/16 33-15/16 with door handle (in.) H 38-3/16 35-15/16 33-15/16 33-15/16 33-15/16 Air clearances Back (in.) 1 1 1 1 1 Approx. shipping weight (lbs.) 344 344/321 306 321/306 306 Power/Ratings 120V, 60 Hz, 15Amps 120V, 60 Hz, 15Amps						
Width w/door open 90° with door handle (in.) H 38-3/16 38-3/16 35-15/16 33-15/16 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
with door handle (in.) H 38-3/16 35-15/16 33-15/16 33-15/16 33-15/16 Image: A constraint of the state of the		35-3/4		31-1/2		31-1/2
Each side (in.) 1/8 1/8 1/8 1/8 1/8 Air clearances Top (in.) 1 1 1 1 1 Approx. shipping weight (lbs.) 344 344 / 321 306 321 / 306 306 Power/Ratings 120V, 60 Hz, 15Amps 120V, 60 Hz, 15Amps						
Top (in.) 1 1 1 1 1 Air clearances Back (in.) 1 1 1 1 1 Approx. shipping weight (lbs.) 344 344/321 306 321/306 306 Power/Ratings 120V, 60 Hz, 15Amps						
Air clearances Back (in.) 1 1 1 1 1 Approx. shipping weight (lbs.) 344 344/321 306 321/306 306 Power/Ratings 120V, 60 Hz, 15Amps						
Approx.shipping weight (lbs.) 344 344/321 306 321/306 306 Power/Ratings 120V, 60 Hz, 15Amps						
Power/Ratings 120V, 60 Hz, 15Amps						
						306
*Color(s) available WW = White on white CC = Bisque on bisque BB= Black on black CleanSteel = Stainless appearance CM = Color-Matched						>

Side-by-side refrigerators






GE Profile™ and GE® bottom-freezer refrigerators

	GE Profile PFS22SIS	PFS22SBS		PDS22SIS	PDS22MIS		PDS22SBS	PDS20SFS	PDS20MFS
	PFS22MIS	PFS22MBS	PDW22SIS	PDS22SFS	PDS22MFS	PDF22MFS	PDS22MBS	PDS20SBS	PDS20MBS
Stainless steel model	•/-	• / -	•	•			•/-	•	
French-door model	•	•							
Capacity									
Total (cu. ft.)	22.2	22.2	22.2	22.2	22.2	22.2	22.2	19.5	19.5
Fresh food (cu. ft.)	15.21	15.21	15.21	15.21	15.21	15.21	15.21	13.21	13.21
Freezer (cu. ft.)	7.04	7.04	7.04	7.04	7.04	7.04	7.04	6.31	6.31
Shelf area (sq. ft.)	27.66	27.66	27.66	27.66	27.66	27.66	27.66	24.44	24.44
Fresh food features									
Upfront electronic touch temp. controls	•	•	٠	•	•	•	•	•	•
TurboCool™ setting	•	•	•	•	•	•	•	•	•
Cabinet shelves	4 glass	4 glass	4 glass	4 glass	4 glass	4 glass	4 glass	4 glass	4 glass
Adjustable	4 split	4 split	4 split	4 split	4 split	4 split	4 split	4 split	4 split
Slide-out	2	2	2	2	2	2	2	2	2
Spillproof	3	3	3	3	3	3	3	3	3
QuickSpace shelf	•	•	•	•	•	•	•	•	•
Internal water dispenser	•		•	• / -	• / -				
GE SmartWater™ filtration	Plus		Plus	Plus	Plus	Plus		Plus / –	Plus / –
Water filter indicator light	•		•	•	•	•		•/-	•/-
ShelfSaver™ rack	•	•	•	•	•	•	•	•	•
Vegetable/fruit crisper(s)	2 adj. humidity	2 adj. humidity	2 adj. humidity	2 adj. humidity	2 adj. humidity	2 adj. humidity	2 adj. humidity	2 adj. humidity	2 adj. humiditu
Deli drawer	Adj. humidity	Adj. humidity	Adj. humidity	Adj. humidity	Adj. humidity	Adj. humidity	Adj. humidity	Adj. humidity	Adj. humidity
ClearLook™ adjustable gallon door bins	4	4	4	4	4	4	4	4	4
Snugger™ clip	•	•	•	•	•	•	•	•	•
	1 with	1 with	1 f/w with	1 f/w with	1 f/w with	1 f/w with	1 f/w with	1 f/w with	1 f/w with
Fixed door bins	gallon storage	gallon storage	gallon storage	gallon storage	gallon storage	gallon storage	gallon storage	gallon storage	gallon storage
Dairy compartment	•	•	•	•	•	•	•	•	•
Interior light (GE Reveal™)	Dual	Dual	Dual	Dual	Dual	Dual	Dual	Dual	Dual
Quiet Design	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe
VeverClean™ condenser	•	•	•	•	•	•	•	•	•
ENERGY STAR®	•	•	•	•	•	•	•	•	•
Freezer features	-	•		-			-	•	
					1			Integrated	Integrated
Factory-installed icemaker & bin	Integrated	Opt. (IM4A)	Integrated	Integrated	Integrated	Integrated	Opt. (IM4A)	Opt. (IM4A)	Opt. (IM4A)
Ice 'N Easy trays	Integrated	2	integrated	integratea	integratea	integratea	2	-/2	-/2
Full slide-out wire basket(s)	2 f/w, 1 split	2 f/w, 1 split	2 f/w, 1 split	2 f/w, 1 split	2 f/w, 1 split	2 f/w, 1 split	2 f/w, 1 split	2 f/w, 1 split	2 f/w, 1 split
Interior light (GE Reveal)	• 2 1/ VV, 1 3pirc	€ 17 W, 1 Spiit	• 2 1/ W, 1 3pin	•	• 2 1/ W, 1 Spire	• 1/ W, 1 Spire	2 i/ w, 1 Spiit	•	2 1/ W, 1 Split
Exterior	-	, U	-	-	-		-	-	
Exterior	22	22		1			22		
Color(s) available*	<u>SS</u> WW, BB	<u>SS</u> WW. BB	SS	SS	WW, CC, BB	WW, BB	<u>SS</u> WW, CC, BB	SS	WW, CC, BB
	Sculptured SS	Sculptured SS			VVVV, CC, DD	VV VV, DD	Sculptured SS		VV VV, CC, DD
Door handle(s)	Color-matched	Color-matched	Sculptured SS	Sculptured SS	Color-matched	Color-matched	Color-matched	Sculptured SS	Color-matched
Factory-installed handles		•	Sculptureu 33	Scuptured 35		Color-Indiched	Color-Indiched		
l de tol g-il istalled l'allales	-	•	Full-wrap	-	•	Contoured	-	•	-
Exterior design	Contoured doors	Contoured doors	contoured	Contoured doors	Contoured doors	high-gloss	Contoured doors	Contoured doors	Contoured doo
Exterior design	Case only (black)	Case only (black)	contoured	Contoured doors	Contoured doors	nign-gioss	Case only (black)	Contoured doors	Contoured door
Textured steel door and case		•		Case only (black)	•	Case only	•	Case only (black)	
Door stops	•	•	•	• Cuse only (bluek)	•	•	•	•	•
Reversible doors	•	•	•	•	•	•	-/•	•	•
Choose left or right door opening			Right only	•		•	•/-	•	•
choose left of right door opening				Front	Front	Front	Front	Front	Front
A altratala a llava	Frank						Front	Front	Front
	Front	Front	Front	FIUIL	I ITOIL	TION			
Weights & Dimensions						•	co 5/0		
Weights & Dimensions Height to top of hinge (in.) A	68-5/8	68-5/8	69-7/8**	68-5/8	68-5/8	68-5/8	68-5/8	68	68
Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B	68-5/8 67-7/8	68-5/8 67-7/8	69-7/8** 69-7/8	68-5/8 67-7/8	68-5/8 67-7/8	68-5/8 67-7/8	67-7/8	67-1/4	67-1/4
Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Case depth without door (in.) C	68-5/8 67-7/8 28-1/4	68-5/8 67-7/8 28-1/4	69-7/8** 69-7/8 28-1/2	68-5/8 67-7/8 28-1/4	68-5/8 67-7/8 28-1/4	68-5/8 67-7/8 28-1/4	67-7/8 28-1/4	67-1/4 28-1/4	67-1/4 28-1/4
Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Case depth without door (in.) C	68-5/8 67-7/8	68-5/8 67-7/8	69-7/8** 69-7/8	68-5/8 67-7/8	68-5/8 67-7/8	68-5/8 67-7/8	67-7/8	67-1/4	67-1/4
Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Case depth without door (in.) C Case depth less door handle (in.) D Case depth with door handle (in.) E	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8	69-7/8** 69-7/8 28-1/2 32-1/4 34-3/8	68-5/8 67-7/8 28-1/4	68-5/8 67-7/8 28-1/4	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8	67-7/8 28-1/4	67-1/4 28-1/4	67-1/4 28-1/4 31-3/4 33-7/8
Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Case depth without door (in.) C Case depth less door handle (in.) D Case depth with door handle (in.) E	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62	69-7/8** 69-7/8 28-1/2 32-1/4	68-5/8 67-7/8 28-1/4 31-3/4	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62	68-5/8 67-7/8 28-1/4 31-3/4	67-7/8 28-1/4 31-3/4	67-1/4 28-1/4 31-3/4 33-7/8 59	67-1/4 28-1/4 31-3/4 33-7/8 59
Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Case depth without door (in.) C Case depth less door handle (in.) D Case depth with door handle (in.) E Depth wifresh food door open 90° (in.) F	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8	69-7/8** 69-7/8 28-1/2 32-1/4 34-3/8	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8	67-7/8 28-1/4 31-3/4 33-7/8	67-1/4 28-1/4 31-3/4 33-7/8	67-1/4 28-1/4 31-3/4 33-7/8
Adjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Case depth without door (in.) C Case depth with door handle (in.) D Case depth with door handle (in.) E Depth wiffresh food door open 90° (in.) F Width (in.) G Width with door open 90° w/door	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62	69-7/8** 69-7/8 28-1/2 32-1/4 34-3/8 61-7/8	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62	67-7/8 28-1/4 31-3/4 33-7/8 62	67-1/4 28-1/4 31-3/4 33-7/8 59	67-1/4 28-1/4 31-3/4 33-7/8 59
Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Case depth without door (in.) C Case depth less door handle (in.) D Case depth with door handle (in.) E Depth w/fresh food door open 90° (in.) F Width (in.) G	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62	69-7/8** 69-7/8 28-1/2 32-1/4 34-3/8 61-7/8	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62	67-7/8 28-1/4 31-3/4 33-7/8 62	67-1/4 28-1/4 31-3/4 33-7/8 59	67-1/4 28-1/4 31-3/4 33-7/8 59
Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Case depth without door (in.) C Case depth less door handle (in.) D Case depth with door handle (in.) E Depth wifresh food door open 90° (in.) F Width (in.) G Width with door open 90° w/door handle (in.) H	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62 32-7/8	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62 32-7/8	69-7/8** 69-7/8 28-1/2 32-1/4 34-3/8 61-7/8 33-1/8†	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62 32-7/8	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62 32-7/8	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62 32-7/8	67-7/8 28-1/4 31-3/4 33-7/8 62 32-7/8	67-1/4 28-1/4 31-3/4 33-7/8 59 29-7/8 33-1/4	67-1/4 28-1/4 31-3/4 33-7/8 59 29-7/8
Weights & Dimensions Height to top of finge (in.) A Height to top of case (in.) B Case depth without door (in.) C Case depth less door handle (in.) D Case depth with door handle (in.) E Depth w/fresh food door open 90° (in.) F Width (in.) G Width with door open 90° w/door handle (in.) H Each side (in.)	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62 32-7/8 36-1/4	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62 32-7/8 36-1/4	69-7/8** 69-7/8 28-1/2 32-1/4 34-3/8 61-7/8 33-1/8† 37-1/2	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62 32-7/8 36-1/4 1/8	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62 32-7/8 36-1/4	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62 32-7/8 36-1/4	67-7/8 28-1/4 31-3/4 33-7/8 62 32-7/8 36-1/4	67-1/4 28-1/4 31-3/4 33-7/8 59 29-7/8 33-1/4 1/8	67-1/4 28-1/4 31-3/4 33-7/8 59 29-7/8 33-1/4
Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Case depth without door (in.) C Case depth without door handle (in.) D Case depth with door handle (in.) E Depth wift door handle (in.) E Width (in.) G Width with door open 90° w/door handle (in.) H Each side (in.) Top (in.)	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62 32-7/8 36-1/4 1/8 1	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62 32-7/8 36-1/4 1/8 1	69-7/8** 69-7/8 28-1/2 32-1/4 34-3/8 61-7/8 33-1/8† 37-1/2 1/8 1	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62 32-7/8 36-1/4 1/8 1	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62 32-7/8 36-1/4 1/8 1	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62 32-7/8 36-1/4 1/8 1	67-7/8 28-1/4 31-3/4 62 32-7/8 36-1/4 1/8 1	67-1/4 28-1/4 31-3/4 33-7/8 59 29-7/8 33-1/4 1/8 1	67-1/4 28-1/4 31-3/4 33-7/8 59 29-7/8 33-1/4 1/8 1
Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Case depth without door (in.) C Case depth less door handle (in.) D Case depth with door handle (in.) E Depth w/fresh food door open 90° (in.) F Width (in.) G Width with door open 90° w/door handle (in.) H Each side (in.)	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62 32-7/8 36-1/4 1/8	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62 32-7/8 36-1/4 1/8	69-7/8** 69-7/8 28-1/2 32-1/4 34-3/8 61-7/8 33-1/8† 37-1/2 1/8	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62 32-7/8 36-1/4 1/8	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62 32-7/8 36-1/4 1/8	68-5/8 67-7/8 28-1/4 31-3/4 33-7/8 62 32-7/8 36-1/4 1/8	67-7/8 28-1/4 31-3/4 33-7/8 62 32-7/8 36-1/4 1/8	67-1/4 28-1/4 31-3/4 33-7/8 59 29-7/8 33-1/4 1/8	67-1/4 28-1/4 31-3/4 33-7/8 59 29-7/8 33-1/4 1/8

Power/Ratings
"Color(s) available: SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.
"When cap is removed: 68-5/8".
tWidth excluding caps: 33".

ALL MODELS AVAILABLE IN U.S. AND CANADA.

Bottom-Freezer Refrigerators






GE bottom-freezer refrigerators

GDS20SCS						
	GDS20SBS	GDS20KBS	GBS22KBR	GBS20KBR	GBS22HBR	GBS20HBS
•	•					
19.5	19.5	19.5	22.3	19.5	22.3	19.5
13.21	13.21	13.21	15.21	13.21	15.22	13.21
6.31	6.31	6.31	7.05	6.32	7.09	6.32
21.4	21.4	21.4	24.0	21.4	24.3	21.4
4 glass	4 glass	4 glass	4 glass	4 glass	3 glass	3 glass
4 split	4 split	4 split	4 split	4 split	2 split, 1 f/w	2 split, 1 f/w
4	4	4	4	4		
2 adj. humidity	2 adj. humidity	2 adj. humidity	2 adj. humidity	2 adj. humidity	2 clear	2 clear
Clear	Clear	Clear	Clear	Clear	Clear	Clear
4 opaque	4 opaque	4 opaque	4 opaque	4 opaque		
•	•	•				
			1 f/w	1 f/w with	2 f/w with	2 f/w with
						gallon storage
-	-	-				•
						Dual
						Deluxe
						•
•	•	•	•	•	•	•
		1	1			
bin Integrated						Opt. (IM4A)
					2	2
	-	-	-	-		
1 f/w, 1 split	1 f/w, 1 split	1 f/w, 1 split	1 f/w, 1 split	1 f/w, 1 split		1 f/w
						1 f/w
						1 split
•	•	•	•	•	•	•
SS	SS	WW, CC, BB	WW, CC, BB	WW, CC, BB	WW, CC, BB	WW
			Color-matched	Color-matched	Color-matched	Color-matched
						Rounded doors
Case only (black	Case only (black)	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
Front	Front	Front	Front	Front	Front	Front
68	68	68	68-5/8	68	68-5/8	68
67-1/4	67-1/4	67-1/4	67-7/8	67-1/4	67-7/8	67-1/4
)C 28-1/4	28-1/4	28-1/4	28-1/4	28-1/4	28-1/4	28-1/4
(in.) D 31-3/4	31-3/4	31-3/4	31-3/4	31-3/4	31-3/4	31-3/4
e (in.) E 33-7/8	33-7/8	33-7/8	34-1/8	34-1/8	34-1/8	33-7/8
						59
	29-7/8	29-7/8	32-7/8	29-7/8	32-7/8	29-7/8
33-1/2	33-1/2	33-1/2	36-1/2	33-1/2	36-1/2	33-1/2
	1/8	1/8	1/8	1/8	1/8	1/8
	1	1	1	1	1	1
	1	1	1	1	1	1
265	265	265	287	265	287	265
<		1	20V, 60Hz, 15Amp)S		>
	13.21 13.21 6.31 21.4 4 glass 4 split 4 2 adj. humidity Clear 4 opaque • 11/w 0 11/w 0 <td>13.21 13.21 6.31 6.31 21.4 21.4 4 glass 4 glass 4 split 4 split 2 adj. humidity 2 adj. humidity 0 0 1 f/w 1 f/w 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 f/w, 1 split 1 f/w, 1 split 1 f/w, 1 split 1 f/w, 1 split 1 f/w, 1 split 1 f/w, 1 split 0 0 0 0 0 0 0</td> <td>13.21 13.21 13.21 6.31 6.31 6.31 6.31 21.4 21.4 21.4 21.4 4 glass 4 glass 4 glass 4 glass 4 split 4 split 4 split 4 split 2 adj. humidity 2 adj. humidity 2 adj. humidity 2 adj. humidity Clear Clear Clear Clear 4 opaque 4 opaque 4 opaque 4 opaque 4 opaque 4 opaque 4 opaque 4 opaque 0 0 0 0 0 1 f/w 1 f/w 1 f/w 1 f/w 1 f/w 0 0 0 0 0 0 0 0 0 0 0 0 0 1 f/w, 1 split 1 f/w, 1 split 1 f/w, 1 split 1 f/w, 1 split 1 f/w, 1 split 1 f/w, 1 split 1 f/w, 1 split 1 f/w, 1 split</td> <td>13.21 13.21 13.21 13.21 15.21 6.31 6.31 6.31 6.31 705 21.4 21.4 21.4 21.4 21.4 24.0 4 glass 4 glass 4 glass 4 glass 4 glass 4 glass 4 4 plit 4 split 4 split 4 split 4 split 4 split 2 adj.humidity 2 adj.humidity 2 adj.humidity 2 adj.humidity 2 adj.humidity 2 adj.humidity Clear Clear Clear Clear Clear Clear Clear 4 opaque 4 opaque 4 opaque 4 opaque 4 opaque 4 opaque • • • • • • • 1 f/w 1 f/w 1 f/w 1 f/w 1 glust 0 pt. (IM4A) 0 pt. (IM4A) 0 pt. (IM4A) 2 2 2 2 2 2 2 bin Integrated 0 pt. (IM4A) 0 pt. (IM4A) 0 pt. (IM4A) 0 pt. (IM4A) 0 pt.</td> <td>13.21 13.21 13.21 13.21 13.21 6.31 6.31 6.31 705 6.32 21.4 21.4 21.4 21.4 24.0 21.4 4 gloss 4 split 2 adj.humidity 2 adj.humidit</td> <td>13.21 13.21 13.21 15.21 13.21 15.22 6.31 6.31 6.31 7.05 6.32 7.09 21.4 21.4 21.4 24.0 21.4 24.3 4 glass 3 glass 4 split 4 split 4 split 4 split 4 split 4 split 2 split, 1 f/w 4 4 4 4 4 4 4 4 2 adj, humidity 2 adj, humidity 2 adj, humidity 2 clear <t< td=""></t<></td>	13.21 13.21 6.31 6.31 21.4 21.4 4 glass 4 glass 4 split 4 split 2 adj. humidity 2 adj. humidity 0 0 1 f/w 1 f/w 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 f/w, 1 split 1 f/w, 1 split 1 f/w, 1 split 1 f/w, 1 split 1 f/w, 1 split 1 f/w, 1 split 0 0 0 0 0 0 0	13.21 13.21 13.21 6.31 6.31 6.31 6.31 21.4 21.4 21.4 21.4 4 glass 4 glass 4 glass 4 glass 4 split 4 split 4 split 4 split 2 adj. humidity 2 adj. humidity 2 adj. humidity 2 adj. humidity Clear Clear Clear Clear 4 opaque 4 opaque 4 opaque 4 opaque 4 opaque 4 opaque 4 opaque 4 opaque 0 0 0 0 0 1 f/w 1 f/w 1 f/w 1 f/w 1 f/w 0 0 0 0 0 0 0 0 0 0 0 0 0 1 f/w, 1 split 1 f/w, 1 split 1 f/w, 1 split 1 f/w, 1 split 1 f/w, 1 split 1 f/w, 1 split 1 f/w, 1 split 1 f/w, 1 split	13.21 13.21 13.21 13.21 15.21 6.31 6.31 6.31 6.31 705 21.4 21.4 21.4 21.4 21.4 24.0 4 glass 4 glass 4 glass 4 glass 4 glass 4 glass 4 4 plit 4 split 4 split 4 split 4 split 4 split 2 adj.humidity 2 adj.humidity 2 adj.humidity 2 adj.humidity 2 adj.humidity 2 adj.humidity Clear Clear Clear Clear Clear Clear Clear 4 opaque 4 opaque 4 opaque 4 opaque 4 opaque 4 opaque • • • • • • • 1 f/w 1 f/w 1 f/w 1 f/w 1 glust 0 pt. (IM4A) 0 pt. (IM4A) 0 pt. (IM4A) 2 2 2 2 2 2 2 bin Integrated 0 pt. (IM4A) 0 pt. (IM4A) 0 pt. (IM4A) 0 pt. (IM4A) 0 pt.	13.21 13.21 13.21 13.21 13.21 6.31 6.31 6.31 705 6.32 21.4 21.4 21.4 21.4 24.0 21.4 4 gloss 4 split 2 adj.humidity 2 adj.humidit	13.21 13.21 13.21 15.21 13.21 15.22 6.31 6.31 6.31 7.05 6.32 7.09 21.4 21.4 21.4 24.0 21.4 24.3 4 glass 3 glass 4 split 4 split 4 split 4 split 4 split 4 split 2 split, 1 f/w 4 4 4 4 4 4 4 4 2 adj, humidity 2 adj, humidity 2 adj, humidity 2 clear Clear <t< td=""></t<>

*Color(s) couldable: SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black. ALL MODELS AVAILABLE IN U.S. AND CANADA.

Bottom-Freezer Refrigerators






GE Profile Arctica® top-freezer refrigerators

PTTS25H5 PTS25H5 PTS25H5 PTS22H6 PTS22H5		GE Profile™					
Copacity 20.6 20.6 21.7		PTS25SHS	PTS25LHS	PTS22SHS	PTS22LHS	PTS22SCS	PTS22LCS
Total (2.1) 22.6 23.6 21.7 7 21.7 7 21.7 7 21.7 7 21.7 7 21.7 7 21.7 7 21.7 7 21.7 7 21.7 7 21.7 7 21.7 7 21.7 7 7 7 7 7 7 7 7 <td>Stainless steel model</td> <td>•</td> <td></td> <td>•</td> <td></td> <td>•</td> <td></td>	Stainless steel model	•		•		•	
Fresh Tool (b, 1L) 17.51 17.51 17.53 15.35 15.35 15.35 Sheff ered (b, 1L) 708 708 6.35	Capacity						
Freezer (cut h) 708 708 708 6.35	Total (cu. ft.)	24.6	24.6	21.7	21.7	21.7	21.7
Shef area (b, ft) 28.7 28.9 25.9 <td>Fresh food (cu. ft.)</td> <td>17.51</td> <td>17.51</td> <td>15.35</td> <td>15.35</td> <td>15.35</td> <td>15.35</td>	Fresh food (cu. ft.)	17.51	17.51	15.35	15.35	15.35	15.35
Fresh food features Image of the segment Image of t	Freezer (cu. ft.)	7.08	7.08	6.35	6.35	6.35	6.35
Internet outbodt disenser Image of the system Image of the system <thimage of="" system<="" th="" the=""> Image of the system<</thimage>	Shelf area (sq. ft.)	28.7	28.7	25.9	25.9	25.9	25.9
Internet outbodt disenser Image of the system Image of the system <thimage of="" system<="" th="" the=""> Image of the system<</thimage>	Fresh food features						
Cimcate/segref* system <td></td> <td>•</td> <td>•</td> <td>•</td> <td>•</td> <td>1</td> <td></td>		•	•	•	•	1	
MultiRow of system Image: Constraint of the system Image: Consthe system Image: Constraintof the system		•	•	•	•	•	•
Upford electronic touch temperture controls Image: Control temperture controls <td></td> <td>•</td> <td>•</td> <td>•</td> <td>٠</td> <td>•</td> <td>•</td>		•	•	•	٠	•	•
Electronic sensors Image: Sensor Micro Sensors Image: Sensors <thimage: sensors<="" th=""> Image: Sensors</thimage:>		•	•	•	•	•	•
Electronic sensors Image: Sensor Micro Sensors Image: Sensors <thimage: sensors<="" th=""> Image: Sensors</thimage:>	touch temperature controls						
Cabinet shelves 4 gloss 4		•	•	•	•	•	•
Cabinet shelves 4 gloss 4	GE SmartWater™ filtration	•	•	•	•		
Adjustable 4 split		4 alass	4 alass	4 alass	4 alass	4 alass	4 alass
Side-out, removable 3		4 split					
Splipporf 4							
SheffSour#* rock •							
Dell por Adj. temp. Adj. tem							
Vegetablefruit crisperisi 2 adj, humidity							
ClearLock™ odjustable gallon door bins 4							
Srugger* clip(a) 2							
Fixed door bins 1 (tail bottle) Dual Dual <thdual< th=""> Dual <thdual< th=""> D</thdual<></thdual<>							
Daing compartment Ouel Dual Dual <thdual< th=""> Dual Dual</thdual<>			-		-		
Interior light system Dual Quiet Design Premium Premium <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td></t<>							
Quiet Design Premium							
Neverclean™ condenser Image: Conde							
ENERGY STAR* • • • • • • • Freezer features Frectory-installed icemaker and bin • <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
Freezer features ●							
Factory-installed icemaker and bin Image: Construction of the end end of the end of the end end end end of the end		•	•	•	•	•	•
Multiflow air system (freezer) • <th< td=""><td></td><td>-</td><td></td><td></td><td>-</td><td></td><td>-</td></th<>		-			-		-
FrostGuard™ technology ●		-	-	-		-	-
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $					-		
$\begin{array}{c c c c c c c c c c c c c c c c c c c $		-	•	•	•	-	-
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$				-	•		
Freezer door bins 2 (1 adj.)							
Tilt-out locking freezer door bin •							
Interior light • • • • • • Exterior Color(s) available* SS WW, CC, BB SS WW, CC, BB SC WW, CC, BB Sc Uptured Deluxe door handle(s) Stainless steel Color-matched Sc uptured stainless steel Color-matched stainless steel							
Exterior SS WW, CC, BB SS WW, CC, BB SS WW, CC, BB SCulptured Deluxe door handle(s) stainless steel Color-matched Sculptured Sculptured Sculptured Letward to the stainless steel Color-matched Sculptured Sculptured Sculptured Letware installed handles Exterior design Rounded doors Rounded d		-			-		-
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		•	•	•	•	•	•
Sculptured betwee door handle(s)Sculptured stainless steelSculptured color-matchedSculptured stainless steelSculptured stainless steelSculptured stainless steelSculptured 			1	1		1	1
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	Color(s) available*		WW, CC, BB		WW, CC, BB		WW, CC, BB
Customer installed handles • </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
Exterior designRounded doorsRounded doorsRou							
Textured steel door and case Case only (black) Case only (black) Case only (black) Case only (black) Reversible doors • <		-	-			-	
Reversible doors •			Rounded doors		Rounded doors		
Adjustable rollers Front Front <td></td> <td></td> <td>•</td> <td></td> <td>•</td> <td>J</td> <td></td>			•		•	J	
Weights & Dimensions Height to top of hinge (in.) A 68-5/8 68-5/8 67-1/2 67-1/2 67-1/2 Height to top of case (in.) B 67-7/8 67-7/8 66-7/8 66-7/8 66-7/8 Case depth without door (in.) C 27-5/8 33-5/8 33-5/8 33-5/8 </td <td></td> <td></td> <td>-</td> <td>-</td> <td>•</td> <td>-</td> <td></td>			-	-	•	-	
Height to top of hinge (in.) A 68-5/8 68-5/8 67-1/2 67-1/2 67-1/2 67-1/2 Height to top of case (in.) B 67-7/8 67-7/8 66-7/8 67-7/8 27-5/8 27-5/8 27-5/8 27-5/8 27-5/8 27-5/8 27-5/8 27-5/8 27-5/8 27-5/8 27-5/8 27-5/8 31-5/8 31-5/8 31-5/8 31-5/8 31-5/8 31-5/8 31-5/8 31-5/8 33-5/8 33-5/8 33-5/8 33-5/8 33-5/8 33-5/8 33-5/8 33-5/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 35 35 35 35 35 35 35 35 <		Front	Front	Front	Front	Front	Front
Height to top of case (in.) B 67-7/8 67-7/8 66-7/8 67-7/8 27-5/8 27-5/8 27-5/8 27-5/8 27-5/8 27-5/8 27-5/8 31-5/8 32-7/8 32-7/8 32-7/8 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
Case depth without door (in.) C 27-5/8 31-5/8 33-5/8 33-5/8 33-5/8 33-5/8 33-5/8 33-5/8 33-5/8 33-5/8 33-5/8 33-5/8 33-5/8 33-5/8 33-5/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 33-5/8 35-5/8 35-5/8 35-5/8 35-5/8 35-5/8 35-5/8 35-5/8 35-5/8 35-5/8 35-7/8 32-7/8	Height to top of hinge (in.) A	68-5/8	68-5/8	67-1/2	67-1/2	67-1/2	67-1/2
Case depth less door handle (in.) D 31-5/8 33-5/8 33-5/8 33-5/8 33-5/8 33-5/8 33-5/8 33-5/8 33-5/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 35-5 35 35-5		67-7/8	67-7/8	66-7/8	66-7/8	66-7/8	66-7/8
Case depth with door handle (in.) E 33-5/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 33-5/8 33-5/8 33-5/8 33-5/8 33-5/8 33-5/8 33-5/8 33-5/8 33-5/8 33-5/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32-7/8 32	Case depth without door (in.) C	27-5/8	27-5/8	27-5/8	27-5/8	27-5/8	27-5/8
Depth w/fresh food door open 90° (in.) F 66 66 63 63 63 63 Width (in.) G 35 7/8 35-7/8 32-7/8 32-7/8 32-7/8 32-7/8 Width w/door open 90° w/door handle (in.) H 38 38 35 35 35 Air clearances Each side (in.) 1/8 1/8 1/8 1/8 1/8		31-5/8	31-5/8	31-5/8	31-5/8	31-5/8	31-5/8
Depth w/fresh food door open 90° (in.) F 66 66 63 63 63 63 Width (in.) G 35 7/8 35-7/8 32-7/8 32-7/8 32-7/8 32-7/8 Width w/door open 90° w/door handle (in.) H 38 38 35 35 35 Air clearances Each side (in.) 1/8 1/8 1/8 1/8 1/8	Case depth with door handle (in.) E	33-5/8	33-5/8	33-5/8	33-5/8	33-5/8	33-5/8
Width (in.) G 35 7/8 35-7/8 32-7/8 35 35 35 35 35 35 35 35 35 35 35 35 35 35 35 36 36 36							
Width w/door open 90° 38 38 35 35 35 w/door handle (in.) H 38 38 35 35 35 35 Air clearances Each side (in.) 1/8 1/8 1/8 1/8 1/8 Joint Clearances Each side (in.) 1 1 1 1 1 Back (in.) 1 1 1 1 1 1 1 Approx. shipping weight (lbs.) 310 310 260 260 260 260							
w/door handle (in.) H 38 38 35 35 35 35 Air clearances Each side (in.) 1/8 1/8 1/8 1/8 1/8 1/8							
Air clearances Each side (in.) 1/8 </td <td></td> <td>38</td> <td>38</td> <td>35</td> <td>35</td> <td>35</td> <td>35</td>		38	38	35	35	35	35
Top (in.) 1 1 1 1 1 1 Back (in.) 1 1 1 1 1 1 Approx. shipping weight (lbs.) 310 310 260 260 260 260							
Back (in.) 1 1 1 1 1 1 Approx.shipping weight (lbs.) 310 310 260 260 260 260							
Approx.shipping weight (lbs.) 310 310 260 260 260 260							
					_		
	Approx. shipping weight (lbs.)	510	310	260	260	260	260

*Color(s) available: SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.

ALL MODELS AVAILABLE IN U.S. AND CANADA.

Top-freezer no-frost refrigerators






GE® top-freezer refrigerators

	GE "K" Series						
	GTH22SBS GTH22SHS	<u>GTS22KCP</u> GTS22KHP	<u>GTH22KBR</u> GTS22KBP	GTS18SBS GTS18SHS	<u>GTS18KCP</u> GTS18KHP	<u>GTH18KBR</u> GTS18KBP	GTS17KBS
Capacity							
Total (cu. ft.)	21.7	21.7	21.7	17.9	17.9	17.9	16.6
resh food (cu, ft.)	15.35	15.35	15.35	12.90	12.87	12.87	12.54
reezer (cu, ft.)	6.35	6.35	6.35	5.04	4.98	4.98	4.10
Shelf area (sq. ft.)	25.3 / 24.9	24.9	25.3	22.0	22.0	22.0	19.7
Fresh food features	20.07 2 1.0	21.5	20.0		22.0	22.0	23.1
Jpfront temperature controls	Illuminated	Illuminated	Illuminated	Illuminated	Illuminated	Illuminated	•
Cabinet shelves	4 glass	4 glass	4 glass	4 glass	4 glass	4 glass	4 glass
Adjustable	4 Split	4 split	4 split	4 split	4 split	4 split	4 split
Spillproof	4	4	4	4	4	4	4
nternal water dispenser	-/•	-/ •	4	-/•	-/•	4	4
GE SmartWater filtration	-/•	-/ •		-/•	-/ •		
/egetable/fruit crisper(s)	2 adj. humidity	2 adj. humidity	2 adj. humidity	2 adj. humidity	2 adj. humidity	2 adj. humidity	2 adj. humidity
nack pan	2 daj. Hurnialty	2 duj. Hurmuny	2 daj. Narmany	2 duj. Hurmany	2 duj. Hurmany	2 daj. Harmany	
	3	3	3	3	3	3	•
djustable gallon door bins ixed door bins	3	3	5	3	3	3	2 full-width
ixed door bins	1 (tall bottle)	1 (tall bottle)	1 (tall bottle)	1 (tall bottle)	1 (tall bottle)	1 (tall bottle)	with gallon storag
Dairy compartment							
nterior light system	Dual	Dual	Dual	Dual	Dual	Dual	Single
	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	
Quiet Design	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe
leverClean condenser	•	•	•/-		•	•/-	•
NERGY STAR®	•		•/-	<u> </u>		•/-	
Freezer features	0.1/04/01/0	-	0.1.(0.1.1)			0.1.(0.1.1.)	0.1/04/11
actory-installed icemaker and bin	Opt. (IM4A) / •	•	Opt. (IM4A)	Opt. (IM4A) / •	•	Opt. (IM4A)	Opt. (IM4A)
ce 'N Easy trays	2/-		2	2/-		2	2
rostGuard technology	•		•/-				
pillproof freezer floor	•	•	•	•	•	•	
Vire freezer compartment shelves	1 full-width (2 pos.)	1 full-width (2 pos.)	1 full-width (2 pos.)	Step	Step	Step	Step
djustable door bins	1	1	1				
ixed door bins	1 split (1 full-width)	1 split (1 full-width)	1 split (1 full-width)	2 split (1 full-width)	2 split (1 full-width)	2 split (1 full-width)	2 full-width
nterior light		•	•	•	•	•	•
Exterior							
Color(s) available*	SS	WW, CC, BB	WW/WW, CC, BB	SS	WW, CC, BB	WW, CC, BB	WW, CC
Door handle(s)*	Tubular stainless steel	CM	CM	Tubular stainless steel	CM	CM	
						CM	CM
ustomer installed handles	•	•	•	•	•	 ●	CM
	• Rounded doors	 Rounded doors 		Rounded doors			CM Square doors
xterior design	•		•	•	•	•	
xterior design extured steel door and case	Rounded doors	Rounded doors	• Rounded doors	Rounded doors	 Rounded doors 	Rounded doors	Square doors
xterior design extured steel door and case eversible doors	Rounded doors Case only (black)	Rounded doors	Rounded doors	Rounded doors Case only (black)	Rounded doors	Rounded doors	Square doors
xterior design extured steel door and case leversible doors djustable rollers	Rounded doors Case only (black)	Rounded doors	Rounded doors	Rounded doors Case only (black)	Rounded doors	Rounded doors	Square doors •
xterior design extured steel door and case leversible doors djustable rollers Weights & Dimensions	Rounded doors Case only (black)	Rounded doors Front	Rounded doors	Rounded doors Case only (black) Front	Rounded doors Front	Rounded doors	Square doors
xterior design extured steel door and case teversible doors djustable rollers Weights & Dimensions leight to top of hinge (in.) A	Rounded doors Case only (black) Front 67-1/2	Rounded doors Front 67-1/2	Rounded doors Front 67-1/2	Rounded doors Case only (black) Front 66-5/8	Rounded doors	Rounded doors Front 66-5/8	Square doors Front 64-3/4
xterior design extured steel door and case eversible doors djustable rollers Weights & Dimensions leight to top of hinge (in.) A leight to top of case (in.) B	Rounded doors Case only (black) Front 67-1/2 66-7/8	Rounded doors Front 67-1/2 66-7/8	Rounded doors	Rounded doors Case only (black) Front 66-5/8 66-1/8	Rounded doors Front 66-5/8 66-1/8	Rounded doors	Square doors Front 64-3/4 64-1/4
xterior design extured steel door and case eversible doors djustable rollers Weights & Dimensions leight to top of hinge (in.) A leight to top of case (in.) B leight to mid-freezer (in.)	Rounded doors Case only (black) Front 67-1/2 66-7/8 54-1/2	Rounded doors Front 67-1/2 66-7/8 54-1/2	Rounded doors	Rounded doors Case only (black) Front 66-5/8 66-1/8 53-15/16	Rounded doors Front 66-5/8 66-1/8 53-15/16	Rounded doors	Square doors Front 64-3/4 64-1/4 54-3/8
xterior design extured steel door and case eversible doors djustable rollers Weights & Dimensions leight to top of hinge (in.) A leight to top of case (in.) B leight to mid-freezer (in.) ase depth without door (in.) C	Rounded doors Case only (black) Front 67-1/2 66-7/8 54-1/2 27-5/8	Rounded doors Front 67-1/2 66-7/8 54-1/2 27-5/8	Rounded doors Front 67-1/2 66-7/8 54-1/2 27-5/8	Rounded doors Case only (black) Front 66-5/8 66-1/8 53-15/16 27-1/2	Rounded doors Front 66-5/8 66-1/8 53-15/16 27-1/2	Rounded doors Front 66-5/8 66-1/8 53-15/16 27-1/2	Square doors Front 64-3/4 64-1/4 54-3/8 25-7/8
xterior design extured steel door and case eversible doors djustable rollers Weights & Dimensions leight to top of hinge (in.) A leight to top of case (in.) B leight to mid-freezer (in.) ase depth without door (in.) C ase depth less door handle (in.) D	Rounded doors Case only (black) Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8	Rounded doors Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8	Rounded doors Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8	Rounded doors Case only (black) Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4	Rounded doors Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4	Rounded doors Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4	Square doors Front 64-3/4 64-1/4 54-3/8 25-7/8 29-1/8
xterior design extured steel door and case eversible doors djustable rollers Weights & Dimensions eight to top of hinge (in.) A eight to top of case (in.) B eight to mid-freezer (in.) ase depth without door (in.) C ase depth less door handle (in.) D ase depth with door handle (in.) E	Rounded doors Case only (black) Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 33-5/8	Rounded doors Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 33-5/8	Rounded doors Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 33-5/8	Rounded doors Case only (black) Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8	€ Rounded doors € Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8	Rounded doors Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8	Square doors Front 64-3/4 64-1/4 54-3/8 25-7/8 29-1/8 31
xterior design extured steel door and case eversible doors djustable rollers Weights & Dimensions leight to top of hinge (in.) A leight to top of case (in.) B leight to mid-freezer (in.) ase depth without door (in.) C ase depth less door handle (in.) D ase depth with door handle (in.) E leight tor inch food door open 90° (in.) F	Rounded doors Case only (black) Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 33-5/8 63	Rounded doors Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 33-5/8 63	Rounded doors Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 33-5/8 63	Rounded doors Case only (black) Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8 58-1/8	€ Rounded doors ● Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8 58-1/8	Rounded doors Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8 58-1/8	Square doors Front 64-3/4 64-1/4 54-3/8 25-7/8 29-1/8 31 54-7/8
xterior design extured steel door and case leversible doors djustable rollers Weights & Dimensions leight to top of hinge (in.) A leight to top of case (in.) A case depth with-door fin.) C case depth with door handle (in.) E lepth w/fresh food door open 90° (in.) F Width (in.) G	Rounded doors Case only (black) Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 33-5/8	Rounded doors Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 33-5/8	Rounded doors Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 33-5/8	Rounded doors Case only (black) Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8	€ Rounded doors € Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8	Rounded doors Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8	Square doors Front 64-3/4 64-1/4 54-3/8 25-7/8 29-1/8 31
xterior design extured steel door and case teversible doors udjustable rollers Weights & Dimensions Height to top of hinge (in.) A Height to top of case (in.) B Height to mid-freezer (in.) case depth without door (in.) C case depth without door (in.) C case depth with door handle (in.) D case depth with door handle (in.) E Depth w/fresh food door open 90° (in.) F Vidth (in.) G Vidth (in.) G	Rounded doors Case only (black) Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 33-5/8 63 32-7/8	Rounded doors Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 33-5/8 63 32-7/8	Rounded doors Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 33-5/8 63 32-7/8	Rounded doors Case only (black) Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8 58-1/8 29-1/2	€ Rounded doors € Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8 58-1/8 29-1/2	Rounded doors Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8 58-1/8 29-1/2	Square doors Front 64-3/4 64-1/4 54-3/8 25-7/8 29-1/8 31 54-7/8 28
xterior design extured steel door and case eversible doors djustable rollers Weights & Dimensions leight to top of case (in.) A leight to top of case (in.) B leight to mid-freezer (in.) ase depth without door (in.) C ase depth less door handle (in.) D ase depth with door handle (in.) E leight wifresh food door open 90° (in.) F Vidth (in.) G Vidth wi/door open 90° v/door handle (in.) H	Rounded doors Case only (black) Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 33-5/8 63 32-7/8 35	Rounded doors Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 33-5/8 63 32-7/8 35	Rounded doors Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 33-5/8 63 32-7/8 35	Rounded doors Case only (black) Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8 58-1/8 29-1/2 32	€ Rounded doors ● Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8 58-1/8 29-1/2 32	Rounded doors • Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8 58-1/8 29-1/2 32	Square doors Front 64-3/4 64-1/4 54-3/8 25-7/8 29-1/8 31 54-7/8 28 30-1/2
xterior design extured steel door and case eversible doors djustable rollers Weights & Dimensions leight to top of hinge (in.) A leight to top of case (in.) B leight to nid-freezer (in.) ase depth without door (in.) C ase depth without door fun.) C ase depth with door handle (in.) D ase depth with door handle (in.) E lepth w/fresh food door open 90° (in.) F Vidth (in.) G Vidth w/door open 90° //door handle (in.) H ir clearances Each side (in.)	Rounded doors Case only (black) Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 63 32-7/8 35 1/8	Rounded doors Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 63 32-7/8 35 1/8	Rounded doors Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 33-5/8 63 32-7/8 35 1/8	Rounded doors Case only (black) Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8 58-1/8 29-1/2 32 1/8	€ Rounded doors € Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8 58-1/8 29-1/2 32 1/8	Rounded doors • • Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8 58-1/8 29-1/2 32 1/8	Square doors Front 64-3/4 64-1/4 54-3/8 25-7/8 29-1/8 29-1/8 29 31 54-7/8 28 30-1/2 3/4
xterior design extured steel door and case eversible doors djustable rollers Weights & Dimensions leight to top of hinge (in.) A leight to top of case (in.) B leight to top of case (in.) B leight to mid-freezer (in.) ase depth without door (in.) C ase depth without door (in.) C ase depth with door handle (in.) D ase depth with door handle (in.) E leight with door open 90° (in.) F Vidth (in.) G Vidth w/door open 90° //door handle (in.) H Each side (in.) Top (in.)	Rounded doors Case only (black) Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 33-5/8 33-5/8 63 32-7/8 35 1/8 1	Rounded doors Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 33-5/8 63 32-7/8 35 1/8 1	Rounded doors Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 63 32-7/8 35 1/8 1	Rounded doors Case only (black) Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8 58-1/8 29-1/2 32 1/8 1	€ Rounded doors € Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8 58-1/8 29-1/2 32 1/8 1	Rounded doors Front Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8 58-1/8 29-1/2 32 1/8 1	Square doors Front 64-3/4 64-1/4 54-3/8 25-7/8 29-1/8 29-1/8 28 30-1/2 3/4 1
	Rounded doors Case only (black) Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 63 32-7/8 35 1/8	Rounded doors Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 63 32-7/8 35 1/8	Rounded doors Front 67-1/2 66-7/8 54-1/2 27-5/8 31-5/8 33-5/8 63 32-7/8 35 1/8	Rounded doors Case only (black) Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8 58-1/8 29-1/2 32 1/8	€ Rounded doors € Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8 58-1/8 29-1/2 32 1/8	Rounded doors • • Front 66-5/8 66-1/8 53-15/16 27-1/2 30-1/4 32-1/8 58-1/8 29-1/2 32 1/8	Square doors Front 64-3/4 64-1/4 54-3/8 25-7/8 29-1/8 31 54-7/8 28 30-1/2 3/4

Power/Ratings
CC = Bisque on bisque, BB = Black on black, CM = Color-Matched.

ALL MODELS AVAILABLE IN U.S. AND CANADA.

Top-freezer no-frost refrigerators



G ≁ Е

→

Top view

Note: All Top-Freezer No-Frost Right-Hand Refrigerator Doors: As you face the front of the refrigerator, the handle is on your left and the hinges are on your right. All Top-Freezer No-Frost Left-Hand Refrigerator Doors: As you face the front of the refrigerator, the handle is on your right and the hinges are on your left.




Listed by Underwriters Laboratories

GE® top-freezer refrigerators

		GE "J" Series					GE "H" Series	GE "G" Series	GE "F" Series	GE "E" Series
		GTL22JBP GTL22JCP	<u>GTS22JBP</u> GTS22JCP	GTL18JCP GTS18JCP	<u>GTL18JBP</u> <u>GTH18JBR</u> GTS18JBP	<u>GTL17JBS</u> GTS17JBS	GTS18HBS GTS18HCS	GTS18GBS	GTS18FBS	GTS18EBS
Capacity		OTELESCI	GTOLLOGI	01010001	01010001	01011000	010101100	01010000	01010105	01010200
Total (cu. ft.)		21.8	21.8	17.9	17.9	16.6	18.2	18.2	18.2	18.2
Fresh food (cu. ft.)		15.47	15.47	12.89	12.89	12.54	13.89	13.89	13.89	13.89
Freezer (cu. ft.)		6.37	6.37	5.03	5.03	4.10	4.27	4.27	4.27	4.27
Shelf area (sq. ft.)		25.1	25.1	22.2	22.2	21.0	21.7	21.7	21.1	23.2
Fresh food featu	roc	23.1	23.1	22.2	22.2	21.0	21.7	21.7	21.1	2.3.2
Upfront temperatur		Illuminated	Illuminated	Illuminated	Illuminated	•	•	•	•	•
ophonic temperatur	econtrois	illuminatea	murminuteu	IIIummatea	murminatea	•	•	•	3 (1 F/W wire.	3 (1 F/W wire.
									1 split wire,	1 split wire,
Cabinet shelves		3 glass	3 glass	3 glass	3 glass	3 glass	3 glass	2 glass	1 split glass)	1 split glass)
Adjustable		2 split, 1 f/w	2 split, 1 f/w	2 split, 1 f/w	2 split, 1 f/w	2 split, 1 f/w	2 split, 1 f/w	2 full-width	3	3
Spillproof		2 spiit, 1 i/w	2 spiit, 1 1/W	2 Split, 1 1/W	2 spiit, 1 1/ W	2 Split, 1 1/ W	2 Split, 1 1/W	2 101-101011		
Vegetable/fruit cris	por(c)	2 clear	2 clear	2 clear	2 clear	2 adj. humidity	2 clear	2 clear	2 clear	2
Snack pan	perio	Clear	Clear	Clear	Clear	Clear	Clear	Clear	Clear	•
зпаскрап		2 full-width,	2 full-width,	2 full-width,	2 full-width,	Cieur	Cieui	Cieur	Cieur	•
Fixed door bins					1 w/gallon storage					
		1/2 with	1/2 with	1/2 with	1/2 with	2 full-width	3 full-width (2	3 full-width (2	3 full-width (2	3 full-width (2
Door shelves		gallon storage	gallon storage	gallon storage	gallon storage	2 Tull-Width w/gallon storage	3 full-width (2 w/gallon storage)	w/gallon storage)		w/gallon storage)
	+	Gallori storage	Gallon storage	guilon storage	•	•	•	• w/guilon storuge/	•	• w/guilon storuge/
Dairy compartmen Interior light system		Dual	Dual	Dual	Dual	Single	Single	Single	Single	Single
Quiet Design	1	Dudi Deluxe	Deluxe	Deluxe	Dudi Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe
		Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe
NeverClean™ cond	enser	•	•	•		•	•	•	•	•
ENERGY STAR®					-/•/-					
Freezer features				1						
Factory-installed ic	emaker & bin	Opt. (IM4A) /	Opt. (IM4A) /	•	Opt. (IM4A)	Opt. (IM4A)	Opt. (IM4A) / 🛛	Opt. (IM4A)	Opt. (IM4A)	Opt. (IM4A)
Ice 'N Easy trays		2/-	2/-		2	2	2/-	2	2	2
Spillproof freezer flo		•	•	•	•					
Wire freezer compo	artment shelves	1 f/w (2 pos.)	1 f/w (2 pos.)	Step	Step	Step	Step	Step	Step	Step
Fixed door shelves		2 full-width	2 full-width	2 full-width	2 full-width	2 full-width	2 full-width	2 full-width	2 full-width	2 full-width
Exterior										
					CleanSteel					
				CleanSteel	WW, CC	CleanSteel				
Color(s) available*		CleanSteel™	WW, CC	WW, CC, BB	WW, CC, BB	WW, BB	WW, CC	WW, CC	WW, CC	WW, CC
Door handle(s)*		Black	CM	Black / CM	Black / CM / CM	Black / CM	CM	CM	CM	CM
Customer installed	handles	•	•	•	•					
Exterior design		Rounded doors	Rounded doors	Rounded doors	Rounded doors	Square doors	Square doors	Square doors	Square doors	Square doors
					Case only (black)					
					•	Case only (black)				
Textured steel door	and case	Case only (black)	•	Case only (black)	•	•	•	•	•	•
Reversible doors		•	•	•	•	•	•	•	•	•
Adjustable rollers		Front	Front	Front	Front	Front	Front	Front	Front	Front
Weights & Dimer	nsions									
Height to top of hir		67-1/2	67-1/2	66-5/8	66-5/8	64-3/4	67-3/8	67-3/8	67-3/8	67-3/8
Height to top of ca		66-7/8	66-7/8	66-1/8	66-1/8	64-1/4	66-7/8	66-7/8	66-7/8	66-7/8
Height to mid-free		54-1/2	54-1/2	53-15/16	53-15/16	54-3/8	57	57	57	57
Case depth withou		27-5/8	27-5/8	27-1/2	27-1/2	25-7/8	26-3/4	26-3/4	26-3/4	26-3/4
Case depth less do		31-5/8	31-5/8	30-1/4	30-1/4	29-1/8	30-1/2	30-1/2	30-1/2	30-1/2
		31-5/8	31-5/8	30-1/4 32-1/8	30-1/4 32-1/8	29-1/8 31	30-1/2 32-3/8	30-1/2 32-3/8	30-1/2 32-3/8	30-1/2 32-3/8
Case depth with do										
	d door open 90° (in.) F	63	63	58-1/8	58-1/8	54-7/8	56-3/8	56-3/8	56-3/8	56-3/8
Width (in.) G		32-7/8	32-7/8	29-1/2	29-1/2	28	28	28	28	28
Width w/door oper						30-1/2				30-3/4
w/door handle (in.)		35	35	32	32		30-3/4	30-3/4	30-3/4	
Air clearances	Each side (in.)	1/8	1/8	1/8	1/8	3/4	3/4	3/4	3/4	3/4
	Top (in.)	1	1	1	1	1	1	1	1	1
	Back (in.)	1	1	1	1	1	1	1	1	1
Approx. shipping w	eight (lbs.)	260	260	226	226	166	228	223	187	187
Power/Ratings		<				120V, 60Hz, 15Amp	;			

Power/Ratings 120V, 60Hz, 15Amps *Color(s) available: WW = White on white, CC = Bisque on bisque, BB = Black on black, CleanSteel™ = Stainless appearance, CM = Color-Matched. ALL MODELS AVAILABLE IN U.S. AND CANADA.

Top-freezer no-frost refrigerators



Note: All Top-Freezer No-Frost Right-Hand Refrigerator Doors: As you face the front of the refrigerator, the handle is on your left and the hinges are on your right. All Top-Freezer No-Frost Left-Hand Refrigerator Doors: As you face the front of the refrigerator, the handle is on your right and the hinges are on your left.



Front view

Top view

E


Tony


GE top-freezer refrigerators

	GE "B" Series				GE "A" Series	
	GTS16BBS GTH16BBS	GTS16BCS	GTR16BBS	GTS12BBP	GTS18ABS	GTR11AAP
Capacity						
otal (cu. ft.)	15.7	15.7	15.7	11.9	18.2	11.4
Fresh food (cu. ft.)	11.57	11.57	11.57	8.94	13.89	8.45
Freezer (cu. ft.)	4.10	4.10	4.10	2.95	4.27	2.99
Shelf area (sg. ft.)	19.2	18.3	19.2	12.1	19.1	13.4
Fresh food features						
Jpfront temperature controls	•	•	•		•	
Cabinet shelves	2 wire	2 wire	2 wire	2 wire	2 wire	2 wire
Adjustable	2 full-width	2 full-width	2 full-width	2 full-width	2 full-width	2 full-width
/egetable/fruit crisper(s)	2	2	2	2	1 full-width	2
	2 full-width	2 full-width	2 full-width		3 full-width	
Door shelves	w/gallon storage	w/gallon storage	w/gallon storage	2-1/2 (1 tall bottle)	(2 w/gallon storage)	4 (1 tall bottle)
Dairy compartment	•	•	•	•	•	
nterior light system	Single	Single	Single	Single	Single	Single
Quiet Design	Deluxe	Deluxe	Deluxe	Standard	Deluxe	Standard
NeverClean™ condenser	•	•	•		•	
ENERGY STAR®	-/•					
Freezer features	, -			1		
actory-installed icemaker & bin	Opt. (IM4A)	•	Opt. (IM4A)	Opt. (IM4A)	Opt. (IM4A)	
ce 'N Easy trays	2		2	1	1	2
ce shelf	•		•		•	
Wire freezer compartment shelves						1 F/W
Fixed door shelves	2	2	2	2	2	2
Exterior	_	_	_		_	
Color(s) available*	WW.CC.BB	WW.CC	WW.CC	WW.CC	ww	WW
Door handle(s)*	CM	CM	CM recessed	CM	CM	CM recessed
Exterior design	Sauare doors	Square doors	Square doors	Rounded doors	Sauare doors	Contoured doors
Reversible doors	•	•	•	•		•
Choose right or left door opening	•	•	•	•	•	
Adjustable rollers	Front	Front	Front	-	Front	
Weights & Dimensions	TIONE	Hone		I	TIONE	
Height to top of hinge (in.) A	61-3/4	61-3/4	61-3/4	60-1/2	67-3/8	57-7/8
Height to top of case (in.) B	61-1/4	61-1/4	61-1/4	60	66-7/8	57-3/8
Height to mid-freezer (in.)	51-3/8	51-3/8	51-3/8	52	57	50
Case depth without door (in.) C	25-7/8	25-7/8	25-7/8	27-3/4	26-3/4	28-1/4
Case depth less door handle (in.) D	29-1/8	29-1/8	29-1/8	30-5/8	30-1/2	30-5/8
Case depth less door handle (in.) D	29-1/8	29-1/8	29-1/8	30-5/8	30-1/2 32-3/8	30-5/8
Lase depth with door handle (in.) E Depth w/fresh food door open 90° (in.) F	54-7/8	54-7/8	29-1/8	51-5/8	56-3/8	52-3/4
	28		28		28	
Nidth (in.) G Nidth w/door open 90°	28	28	28	23-7/8	28	23-7/8
Width W/door open 90° w/door handle (in.) H	30-1/2	30-1/2	28-5/8	26-1/2	30-3/4	25-1/8
Air clearances Each side (in.)	30-1/2 3/4	30-1/2	28-5/8	1	30-3/4	25-1/8
	3/4	3/4	3/4	4	3/4	4
Top (in.)	1				-	3
Back (in.)	1	1	1	2	1	163
Approx. shipping weight (lbs.)		169			177	163
Power/Ratings	<		120V, 60H	lz, 15Amps ———		

*Color(s) available: WW = White on white, CC = Bisque on bisque, BB = Black on black, CM = Color-Matched. ALL MODELS AVAILABLE IN U.S. AND CANADA.

Top-freezer no-frost refrigerators





Top view


Note: All Top-Freezer No-Frost Right-Hand Refrigerator Doors: As you face the front of the refrigerator, the handle is on your left and the hinges are on your right. All Top-Freezer No-Frost Left-Hand Refrigerator Doors: As you face the front of the refrigerator, the handle is on your right and the hinges are on your left.



GE[®] manual defrost refrigerator

	GE
	GMS10AAR
Capacity	
Total (cu. ft.)	9.7
Fresh food (cu. ft.)	8.74
Freezer (cu. ft.)	.97*
Shelf area (sq. ft.)	9.88
Features	
Ice 'N Easy trays	2
Freezer chiller tray with baffle	•
Cabinet shelves	2 adj.
Vegetable/fruit crisper	1 full-width
Door shelves	5 (2 egg w/pockets)
Tall bottle storage on door	•
Dairy compartment(s)	1
Freezer compartment shelf(s)	1 full-width
Economical/Quiet	
Cabinet/door insulation	Foam
Cabinet/door liner	Plastic
Appearance	
Color(s) available	White
Door handle(s)	White
Right or left door opening	•
Weights & Dimensions	
Height to top of hinge (in.) A	58
Height to top of case (in.) B	57-9/16
Case depth without door (in.) C	21-3/8
Case depth with door less handle (in.) D	23-1/2
Case depth with door handle (in.) E	24-13/16
Depth with door open 90°	
less door handle (in.) F	44-13/16
Width (in.) G	23
Width w/door open 90°	
less door handle (in.) H	23-1/2
Air clearances Each side (in.)	5/8
Top (in.)	2
Back (in.)	1
Approx. shipping weight (lbs.)	135

Manual defrost single-door refrigerator



*Compartment for short-term storage of frozen food. The frozen food compartment of this refrigerator will make ice, and pre-frozen foods can be stored for about two weeks. It will not effectively freeze fresh foods or provide long-term storage for meats, poultry, or fish.

GE Spacemaker® compact refrigerators

1	5			
	GE			
	GMR06AAP	GMR04HAS	GMR04AAM	GMR02BAN
Capacity				
Total (cu. ft.)	6.0	4.3	4.4	1.7
Fresh food (cu. ft.)	5.51	3.89	3.99	1.49
Freezer (cu. ft.)	.49**	.42**	.39**	.16**
Shelf area (sq. ft.)	8.8	5.6	5.6	2.9
Features				
Ice 'N Easy trays	2 mini	1 mini	1 mini	1 mini
Manual defrost	•	•	•	•
Cabinet shelves (wire)	2 (1 adj.)	3 glass (2 full-width, 1 split)		1
Can rack	•	•	•	
Door shelves	1 f/w, 2 half-width	2 f/w, 1 half-width	2 f/w, 1 half-width	1 f/w, 1 half-width
Interior light	•			
Economical/Quiet			-	
Cabinet/door insulation	Foam	Polystyrene	Polystyrene	Foam
Cabinet/door liner	HIPS	ABS	ABS	ABS
Appearance				
Color(s) available*	WW, BB	BS	WW, BB	WW, BB
	White visor/		Color-matched	Color-matched
Door handles	black visor	Black recessed	recessed	recessed
Rounded doors		•	•	•
Reversible doors	•			
Weights & Dimensions				
Height (in.) A	34-1/4	32-3/4	32-7/8	18-15/16
Width (in.) B	23-5/8	20-1/2	20	17-1/2
Depth with handle (in.) C	25-7/8	21	21-3/4	19-1/4
Depth with door open 90° (in.) D	47-1/2	39-15/16	40-1/8	35-1/2
Air clearances Each side (in.)	0†	1/2	1/2	1/2
Top (in.)	0	2	2	2
Back (in.)	0	2	2	2
Approx. shipping weight (lbs.)	88	79	77	51
Accessories				
Custom trim (optional)	TPK6***(black only)			

Custom trim (optional) [1PK6***(black only)] *Color(s) available: WW = White on white, BB = Black on black, BS = Black case with stainless door

**Compartment for short-term storage of frozen food. The frozen food compartment of this is refrigerator will make ice, and pre-frozen foods can be stored for about two weeks. It will not effectively freeze fresh foods or provide long-term storage for meats, poultry, or fish.

†If installed against a wall, allow 1-1/4" on hinge side to allow for proper door opening.


GE Profile[™] wine cooler

	GE Profile
	PWR04FANBS
Capacity	
Total (cu. ft.)	4.3
Bottle capacity	29
Features	
Electronic touch controls	•
Adjustable temperature contro (45-65°F)	ol
See-through door	•
Door design	Contoured
Pull-out and adjustable racks	Chrome wine rack
Multiple shelf liner positions	5 full-width, 1 display
Interior light	•
Interior light timer (60 min. del	ay) 🔸
Lock	•
Appearance	
	Black case and
Color(s) available	stainless trim
Door handle	Recessed
Free-standing	•
Meets California Energy	
Commission (CEC) requirement	
Cabinet liner color	Black
Reversible door	•
Weights & Dimensions	
Height (in.) A	33-1/2
Width (in.) B	20-1/8
Depth with handle (in.) C	22-3/4
Depth with door open 90° (in.)	
Air clearances Each side (in	.) 1-1/2
Top (in.)	2
Back (in.)	2
Approx. shipping weight (lbs.)	97

Spacemaker compact refrigerators/ Wine coolers



Front view



ge.com

GE chest freezers

	GE							₩	
	FCM25RM	FCM20DP	FCM15DP	FCM15SP	FCM9DM	FCM7DN	FCM5DM	FCM5SM	·
Capacity									A
Total volume (cu. ft.)	25.1	19.7	14.8	14.8	8.8	7.0	5.0	5.0	· _
Features									_ <u>↓</u>
Manual defrost	•	•	•	•	•	•	•	•	-
Temperature control	Adj.	Adj.	Adj.	Adj.	Adj.	Adj.	Adj.	Adj.	-
Power "ON" light						•	•		_
Wraparound condenser	•	•	•	•	•	•	•	•	-
Wraparound evaporator	•	•	•	•	•	•	•	•	-
Limited food loss warranty*	•	•	•	•	•	•			1
Upfront defrost water drain	•	•	•	•	•	•	•	•	i //
Interior light		•	•	•		•			1 I I
Lock		•	•	•		•	•	•	° 11
Lift-out and sliding									
bulk storage basket(s)	4	3	2	1	2	2	2	1	
Economical/Quiet									
Insulation (cabinet and lid)–Foam	•	•	•	•	•	•	•	•	
	Steel	Steel	Steel	Steel	Textured	Textured	Textured	Textured	
Cabinet liner	epoxy-coated	epoxy-coated	epoxy-coated	epoxy-coated	aluminum	aluminum	aluminum	Aluminum	
Appearance									
Color available	White	White	White	White	White	White	White	White	_ I.
Handle	•	Recessed	Recessed	Recessed	Recessed	Recessed	Recessed	Recessed	_ Side
Textured steel case and lid	•	•	•	•	•				_
Weights & Dimensions									
Height (in.) A	35	35	35	35	34-1/4	33-1/8	33	33	_
Width (in.) B	73-7/8	61-1/4	48	48	41	38	29-1/8	29-1/8	_
Depth (in.) C	28-3/4	29-1/2	29-1/2	29-1/2	23-1/4	22-3/8	22-3/16	22-3/16	_
Height with lid open (in.) D	59-3/4	60-3/4	60-3/4	60-3/4	54-1/4	53-1/4	53-3/16	53-3/16	_
Air clearances Each side (in.)	3	3	3	3	3	3	3	3	_
Back (in.)	3	3	3	3	3	3	3	3	_
Approx. shipping weight (lbs.)	245	195	161	161	127	126	101	101	-

Approx. shipping weight (lbs.) *See written warranty for complete details.

GE upright freezers

	GE								
	Frost-Free			Manual Defrost					_
	FUF20DP	FUF17DP	FUF14DP	FUM21DR	FUM17DR	FUM14DR	FUM14SR	FUM5SN	
Capacity									
Total volume (cu. ft.)	20.3	16.7	13.7	20.6	17.1	14.1	14.1	5.0	
Shelf area (sq. ft.)	23.9	18.4	14.3	25.3	19.1	17.9	15.0	6.0	
Features									
Temperature control	Adj.	Adj.							
Limited food loss warranty*	•	•	•	•	•	•	•	•	
Door shelves (total)	6	5	5	6	5	5	5	3	
Defrost water drain				•	٠	•	•		
Interior light		•	•	•	•	•	•		_ ↓ └───
Lock		•	•	•	•	•	•		- Front vie
Cabinet shelves (total)	5 (3 adj.)	4 (3 adj.)	3 (2 adj.)	5 (1 adj.)	4 (1 adj.)	4 (1 adj.)	3	2	
Slide-out bulk storage basket	1	1	1	1	1	1			-
Economical/Quiet									к — В —
Defrost	Frost-Free	Frost-Free	Frost-Free	Manual	Manual	Manual	Manual	Manual	· *
Magnetic door gasket	•	•	•	•	•	•	•	•	
	Baked								
Cabinet liner	enamel-on-steel	Polystyrene	- ĭ						
Wraparound condenser	•	•	•	•	•	•	•	•	_ ¥ 4
Appearance									/
Color available	White	White	_ Top view						
Door handle	Recessed	Recessed	_ : //						
Textured steel case/door	•	•	•	•	•	•	•	•	- 47
Weights & Dimensions									
Height (in.) A	70	64-1/2	59	70	64-1/2	59	59	33-1/2	
Width (in.) B	32	32	28	32	32	28	28	21-3/8	_
Depth (in.) C	28-1/2	26-1/2	28-1/2	28-1/2	26-1/2	28-1/2	28-1/2	26-1/8	_
Depth with door open 90° (in.) D	59-1/8	57-1/8	55-1/8	59-1/8	57-1/8	55-1/8	55-1/8	45-3/4	_
Air clearances Each side (in.)	3	3	3	3	3	3	3	1	_
Top (in.)	3	3	3	3	3	3	3	4	_
Back (in.)	3	3	3	3	3	3	3	4	_
Approx. shipping weight (lbs.)	235	213	186	224	200	177	177	80	_

*See written warranty for complete details.



A century of quality and innovation

For more than a century, GE has been committed to producing innovative products that change the way people live. The result of thorough research and rigorous testing, GE appliances are designed for years of dependable performance. Today, the GE tradition of quality and innovation continues.

> Before purchasing an appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your retailer or GEAppliances.com

GE has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.

© 2005 GE Company PC40194 Pub. No. 2-X045

GE Consumer & Industrial Appliances General Electric Company Louisville, KY 40225 ge.com