

DESIGNER

TRAPEZE

ISLAND

ZEPHYR

ZEPHYRONLINE.COM

DESIGNER:
FU-TUNG CHENG




48" width




36" width




Optional Wireless Remote Control

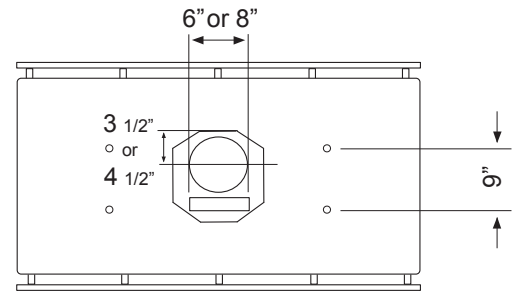

Top

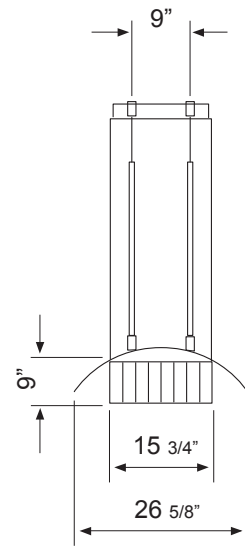

Side

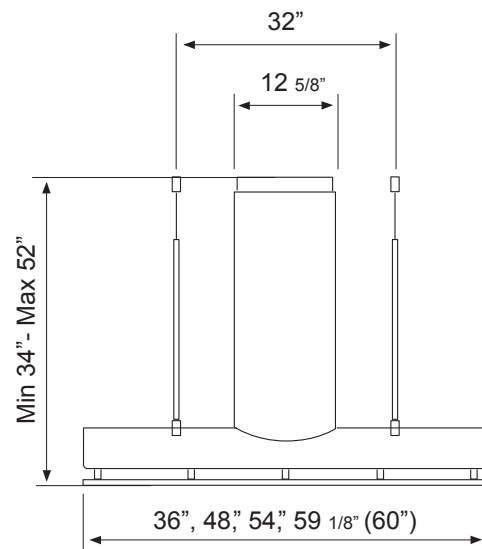

Front

DESIGNER:
FU-TUNG CHENG

MODEL	CTP-E36CSX	CTP-E48CSX	CTP-E54CSX	CTP-E60CSX
Stainless Steel Size	36"	48"	54"	60"
PERFORMANCE				
Internal Blower (CBI-290C)*	200-290 CFM, 1.4-3 sones	200-290 CFM, 1.4-3 sones	200-290 CFM, 1.4-3 sones	200-290 CFM, 1.4-3 sones
Internal Blower (CBI-390A)*	200-390 CFM, 1.4-5 sones	200-390 CFM, 1.4-5 sones	200-390 CFM, 1.4-5 sones	200-390 CFM, 1.4-5 sones
Internal Blower (CBI-600A)*	240-600 CFM, 1.8-6 sones	240-600 CFM, 1.8-6 sones	240-600 CFM, 1.8-6 sones	240-600 CFM, 1.8-6 sones
In-Line Blower (PBN-1000A)*	500-1,000 CFM, sones NA	500-1,000 CFM, sones NA	500-1,000 CFM, sones NA	500-1,000 CFM, sones NA
External Blower (CBE-1000)*	500-1,000 CFM, sones NA	500-1,000 CFM, sones NA	500-1,000 CFM, sones NA	500-1,000 CFM, sones NA
FEATURES				
Controls	Electronic Touch Controls	Electronic Touch Controls	Electronic Touch Controls	Electronic Touch Controls
Speed Levels	3	3	3	3
Auto Delay-Off	Yes	Yes	Yes	Yes
Directional Lighting	LumiLight LED, 6W x2	LumiLight LED, 6W x4	LumiLight LED, 6W x4	LumiLight LED, 6W x4
Tri-Level Lighting	Yes	Yes	Yes	Yes
Filters	Professional Baffle	Professional Baffle	Professional Baffle	Professional Baffle
Wireless Remote Control Option	Yes, RF	Yes, RF	Yes, RF	Yes, RF
Recirculating Option	No	No	No	No
Extension Duct Cover	Yes, Up to 12' Ceiling	Yes, Up to 12' Ceiling	Yes, Up to 12' Ceiling	Yes, Up to 12' Ceiling
ADA Compliant	Yes (with remote accessory)	Yes (with remote accessory)	Yes (with remote accessory)	Yes (with remote accessory)
DUCT SPECIFICATIONS				
Vertical - Internal Blower	6" Round	6" Round	6" Round	6" Round
Vertical - External/In-Line Blower	10" - 8***	10" - 8***	10" - 8***	10" - 8***
Horizontal	NA	NA	NA	NA
AC POWER				
Hood w/ CBI-290C	120V, 60Hz, Max. 0.95A	120V, 60Hz, Max. 0.95A	120V, 60Hz, Max. 0.95A	120V, 60Hz, Max. 0.95A
Hood w/ CBI-390A	120V, 60Hz, Max. 2.1A	120V, 60Hz, Max. 2.1A	120V, 60Hz, Max. 2.1A	120V, 60Hz, Max. 2.1A
Hood w/ CBI-600A	120V, 60Hz, Max. 2.95A	120V, 60Hz, Max. 2.95A	120V, 60Hz, Max. 2.95A	120V, 60Hz, Max. 2.95A
Hood w/ PBN-1000A	120V, 60Hz, Max. 5.65A	120V, 60Hz, Max. 5.65A	120V, 60Hz, Max. 5.65A	120V, 60Hz, Max. 5.65A
Hood w/ CBE-1000	120V, 60Hz, Max. 6.45A	120V, 60Hz, Max. 6.45A	120V, 60Hz, Max. 6.45A	120V, 60Hz, Max. 6.45A
OPTIONAL ACCESSORIES				
Extension Duct Cover	Z1C-00TP	Z1C-00TP	Z1C-00TP	Z1C-00TP
Make-Up Air Kit	MUA006A (600 CFM) MUA008A (1,000CFM)	MUA006A (600 CFM) MUA008A (1,000CFM)	MUA006A (600 CFM) MUA008A (1,000CFM)	MUA006A (600 CFM) MUA008A (1,000CFM)
Wireless Remote Control	14000005	14000005	14000005	14000005
MOUNTING HEIGHT RANGE***	26" - 36"	26" - 36"	26" - 36"	26" - 36"
WARRANTY	3 years parts, 1 year labor	3 years parts, 1 year labor	3 years parts, 1 year labor	3 years parts, 1 year labor

CEILING HEIGHT		8'	8.5'	9'	9.5'	10'	10.5'	11'	12'
STANDARD DUCT COVER	Ducted Mounting Height***	26" - 26"	26" - 32"	26" - 36"	26" - 36"	32" - 36"	NA	NA	NA
EXTENSION DUCT COVER	Ducted Mounting Height***	NA	NA	NA	26" - 30"	26" - 36"	26" - 36"	26" - 36"	36" - 36"

*Blower sold separately.

**10" round duct connects to external and in-line blower. Must transition from 10" to 8" before duct passes through ceiling. A 10" to 8" adapter is included with external and in-line blowers.

***Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.