Electrolux

Induction Cooktops






More Energy Efficient

Cooking with induction is 70% more efficient than gas and 20% more efficient than electric.



More Responsive

Cooking with induction is more responsive than gas or electric—you can instantly adjust the heat to a delicate simmer or bring it to a quick boil.



Two 8" Induction Elements

With four powerfully efficient induction elements, the Induction Cooktop offers the utmost cooking flexibility. And the two 8" induction elements offer up to 3,200 watts of power, so you can bring water to a boil quickly.



Exceptional Temperature Control

Adjust heat with greater accuracy than gas or electric cooktops, especially at lower settings. Perfect for melting chocolate and cooking delicate foods and sauces.


30" INDUCTION COOKTOPS

| Perfect Set® Electronic Touch Controls | Yes |
|--|--|
| Ceramic Smoothtop Glass Surface | Yes |
| 8" Induction Cooking Element – 2300W/3200W | 2 |
| 7" Induction Cooking Element – 1900W | 1 |
| 6" Induction Cooking Element – 1500W | 1 |
| Hot Surface Indicator Lights | Yes |
| Sealed Spill Control Cooktop | Yes |
| Sabbath Mode (Star-K [®] Certified) | Yes |
| Accessories | |
| Granite Countertop Installation Kit – PN# 903061-9010 | Optional |
| Specifications | |
| Colour – | |
| Stainless Steel | S |
| Product Dimensions – | |
| | 30-3/4" |
| Width | 30-3/4 |
| Width Depth | 21-3/4" |
| | |
| Depth | 21-3/4" 2-1/2" |
| Depth Height (Extreme Bottom to Underside of Cooktop) | 21-3/4" 2-1/2" |
| Depth Height (Extreme Bottom to Underside of Cooktop) Power Supply Connection Location | 21-3/4" 2-1/2" Right Center Rear |
| Depth Height (Extreme Bottom to Underside of Cooktop) Power Supply Connection Location Connected Load (kW Rating) @ 240/208 Volts | 21-3/4" 2-1/2" Right Center Rear 7.7/6.7 |
| Depth Height (Extreme Bottom to Underside of Cooktop) Power Supply Connection Location Connected Load (kW Rating) @ 240/208 Volts Amps @ 240/208 Volts | 21-3/4" 2-1/2" Right Center Rear 7.7/6.7 32/32 |
| Depth Height (Extreme Bottom to Underside of Cooktop) Power Supply Connection Location Connected Load (kW Rating) @ 240/208 Volts Amps @ 240/208 Volts Amps @ 240/208 Volts Minimum Circuit Required (Amps) Electrical – Single phase 4-wire cable, 120/240 Volts or 120/208 Volts, 60 Hz. | 21-3/4" 2-1/2" Right Center Rear 7.7/6.7 32/32 40 |
| Depth Height (Extreme Bottom to Underside of Cooktop) Power Supply Connection Location Connected Load (kW Rating) @ 240/208 Volts Amps @ 240/208 Volts Minimum Circuit Required (Amps) Electrical – Single phase 4-wire cable, 120/240 Volts or 120/208 Volts, 60 Hz, tused on both sides of line with ground. | 21-3/4" 2-1/2" Right Center Rear 7.7/6.7 32/32 40 Required |
| Depth Height (Extreme Bottom to Underside of Cooktop) Power Supply Connection Location Connected Load (kW Rating) @ 240/208 Volts Amps @ 240/208 Volts Minimum Circuit Required (Amps) Electrical – Single phase 4-wire cable, 120/240 Volts or 120/208 Volts, 60 Hz, fused on both sides of line with ground. Armored Electrical Cable | 21-3/4" 2-1/2" Right Center Rear 7.7/6.7 32/32 40 Required Included |

NOTE: Always consult local and national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at electroluxappliances.ca. Specifications subject to change.

Electrolux

EW30IC60IS

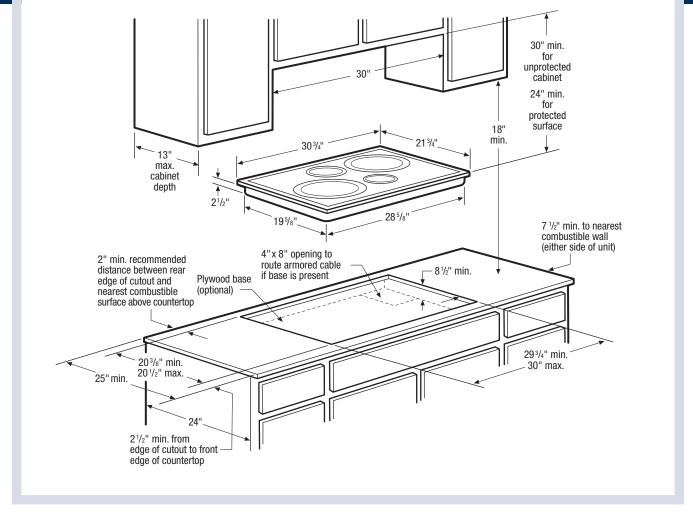

30" Induction Cooktop Specifications

- Product Weight 45 Lbs.
- Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz, fused on both sides of line with ground.
- Connected Load (kW Rating) @ 240/208 Volts = 7.7/6.7 kW
- Amps @ 240/208 Volts = 32.0/32.0 Amps
- Recommended Circuit Breaker 40 Amps
- Always consult local and national electric codes.
- Allow 2" space beneath cooktop or optional platform to clear electrical cable and allow space for installation of junction box on wall at back of cooktop. Position center of junction box 10" inward from right side of cooktop cutout, and 12" down from underside of countertop.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Allow 30" minimum clearance between top of cooktop and bottom of unprotected wood or metal overhead cabinetry.
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than 30".
- Allow 24" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/8" flame-retardant millboard covered with not less than No. 28 MGS sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.
- Allow 2" minimum clearance between rear edge of cutout and nearest combustible surface above countertop.

- Allow 7-1/2" minimum clearance from edge of cooktop to nearest combustible wall on either side of unit.
- Installation of drawers beneath cooktop requires minimum 10" clearance beneath countertop surface and assured clearance for electrical connection.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.
- Induction Cooktop model EW30IC60I is approved to be used over any Electrolux Electric Single Wall Oven. (Refer to Electric Cooktop Installation Over 30"/27" Electric Single Wall Oven Specifications page on web.)
- Induction Cooktop model EW30IC60I is approved to be used in combination with any Electrolux 30" Downdraft Vent. (Refer to modelspecific Downdraft Vent product page on web for detailed countertop preparation specifications.)

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxappliances.ca for detailed instructions.

Optional Accessories

Granite Countertop Installation Kit – (PN# 903061-9010).



Electrolux Major Appliances, N.A.

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • electroluxappliances.ca

High standards of quality at Electrolux Major Appliances mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.