KPH48XT

48" WALLMOUNT CHIMNEY HOOD, 1 MOTOR STAINLESS STEEL





Complete your Bertazzoni kitchen with this heavy-duty chimney hood.

Choose among 4 extraction airflow speeds, reaching a maximum flow performance of 600 CFM (cubic feet per minute).

Easily throttle down airflow to 395 CFM with the digital airflow reducer

Easily control all hood functions with the electronic controls, which include timer, filter saturation alarm and air-cleaning option.

Enjoy powerful illumination of the cooking surface with the bright, energy efficient LED light bar

Filter out odors and grease with the stainless steel baffle filters, which can be easily cleaned periodically in the dishwasher.

The hood comes standard for venting outside the kitchen, but can be easily modified for recirculation by installing the optional charcoal filters.

Designed and manufactured with pride in Italy.

Industry leading 2 years parts and labor warranty.

PRODUCT FEATURES	
Size	48"
Hood type	Wall mount
Hood finish	Stainless steel
Motor	1
Speed	3 + Booster
Hood control	Electronic with buttons
Lights	LED bar
Filters type	Baffle stainless steel
Extraction power	600 CFM
Recirculation	Yes
Duct cover	Included
Duct size	6" diameter
TECHNICAL SPECIFICATIONS	
Electrical supply	120 V 60 HZ - 420 W 3.5 Amp
Power connection	Hardwired
Certification	CEC,UL
Packaging dimensions and weight	W 50 25/32" H 24 19/32" D 35 1/32" 90.39 lbs
OPTIONAL ACCESSORIE	ES
901612	Charcoal filter KPH/KV PRO

version: 1 bertazzoni.com

KPH48XT


48" WALLMOUNT CHIMNEY HOOD, 1 MOTOR STAINLESS STEEL




PRODUCT DIMENSIONS

FRONT VIEW 29" 13/32 11" 27/32 7, 128/32 min 16" 23/32 · max 38" 17" 47" 61/64 19" 11/16

TOPVIEW



PRODUCT INSTALLATION

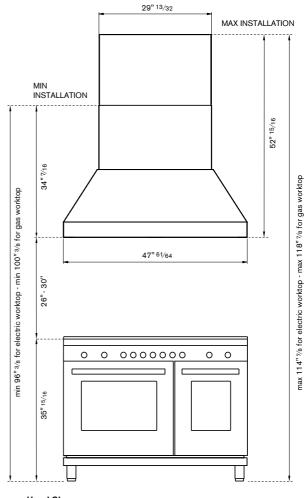

Hood Clearance


Recommended height above cooking surface: min 26" for electric worktop min 30" for gas worktop


POWER SUPPLY CONNECTION

For connection to the power supply refer to the follows:

BLACK = L line
WHITE = N neutral
GREEN/YELLOW = G ground

A double-pole switch properly rated must be installed to provide the range hood power supply disconnection.





Disclaimer: while every effort has been made to ensure the accuracy of the information contained in this document, Fratelli Bertazzoni reserves the right to change it at any time without notice. For detailed installation instructions, consult the installation manual. Fratelli Bertazzoni, Bertazzoni and the winged wheel brand icon are registered trademarks of Bertazzoni Spa.