





Dishwasher-safe baffle filters feature handles for convenient removal.

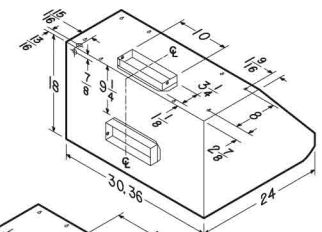

Models
E6030SS
E6036SS

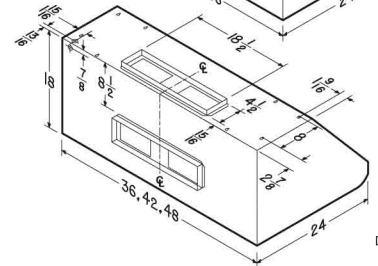

Models
E6042TSS
E6048TSS

Dimensions shown are in inches.

Broan Elite E60000 Series

Selecting the right professional style range hood just became easier. Broan introduces the E60000 range hoods in 18" wall-mount version. These new models come with integrated internal blowers or dedicated external blower capability. Styling is fresh and modern, yet designed to easily complement popular pro-style cooking products.

- 18" wall-mount design
- Brushed stainless steel finish
- 30", 36", 42" and 48" widths, 24" depth
- 600 CFM internal blower is standard on 30" and 36" models
- 1200 CFM internal blower is standard on 36", 42" and 48" models
- Dedicated models in all widths for use with external blower options—choice of eight, from 280–1500 CFM
- Bright halogen lighting; Two 50-watt bulbs in 30" and 36" widths, Three 50-watt bulbs in 42" and 48" widths (purchase bulbs separately)
- Pro-style, dishwasher-safe baffle filters with removable grease drip rail
- 4-speed rotary switch control (for internal blower only)
- Heat Sentry™ detects excessive heat and adjusts blower speed automatically
- Optional pro-style backsplash and decorative 12" soffit flue
- Designed to duct out of the hood shell in either horizontal or vertical direction with any blower configuration

SPECIFICATIONS

WIDTH	INTERNAL BLOWER** 600 CFM Duct 3-1/4" x 10"	INTERNAL BLOWER** 1200 CFM Duct 4-1/2" x 18"	EXTERNAL BLOWER** CAPABLE Duct 10" Rd	MAX AMPS*	SONES AT NORMAL SPEED*	OPTIONAL 12" SOFFIT FLUE COVER	OPTIONAL BACK-SPLASH
30"	E6030SSC		E60E30SS	5.5	1.5 max	AEE60302SS	RMP3004
36"	E6036SSC	E6036TSSC	E60E36SS	5.5	1.5 max	AEE60362SS	RMP3604
42"		E6042TSSC	E60E42SS	9.0	2.0 max	AEE60422SS	RMP4204
48"		E6048TSSC	E60E48SS	9.0	2.0 max	AEE60482SS	RMP4804

OPTIONS

- SV08343 Replacement charcoal filter
- ARP310*** Air flow reducer (limits the airflow of the hood under 300 CFM)

* Sones at high speed for Internal 600 – 13.5 max; Internal 1200 – 14.5 max
 ** Duct adapter & damper is included with the Internal blowers: External blower capable models include the 332KR rough-in kit
 *** 600 CFM hoods only
 • 120V 60Hz

