



Broan Elite RMP Series

The RMP Custom Power Pack offers ventilation and lighting for custom applications. Designed to fit flush with the bottom of the cabinet or custom hood, this versatile collection features fully enclosed bottoms and a 400 CFM internal blower.

- Brushed stainless steel finish.
- Dishwasher-safe aluminum filters feature a quick-release latch and professional style appearance.
- Includes two 20-watt halogen bulbs.
- Multi-speed control.
- Internal 400 CFM centrifugal blower or choice of exterior blower options from 600 to 1500 CFM or four in-line blowers from 280 to 1100 CFM. (Rough-In Kit required for external blowers #332KR).
- Optional non-ducted filters (FILTEREB40) on RMP1 only for indoor exhaust recirculation; some ductwork required.
- Optional custom hood liners available in 30", 36", 48" widths.

3 Easy Steps

1. Select model:
Internal blower RMP17004
External blower RMPE7004
2. Select a liner:
RML7030S 30" width
RML7036S 36" width
RML7048S 48" width
3. Select an external blower (RMPE only).


SPECIFICATIONS

WIDTH	STAINLESS STEEL	BLOWER	VOLTS	AMPS	CFM	DUCT
27 9/16"	RMP17004	Internal	120	3.1	400	6" round
27 9/16"	RMPE7004	External*	120	3.1	*	8" round


OPTIONS

FILTEREB40	Replacement Charcoal Filter	RML7030S	30" Liner
B08087153	Replacement Aluminum Filter	RML7036S	36" Liner
ARP6**	Air flow reducer (limits the airflow of the hood under 300 CFM)	RML7048S	48" Liner


* External blowers sold separately.
** For RMP1 series only.

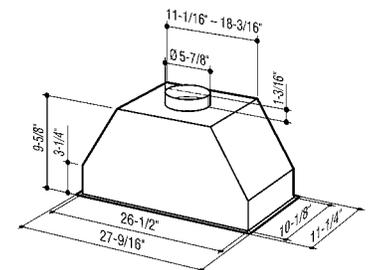

RMP1

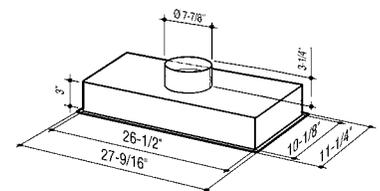

RMPE

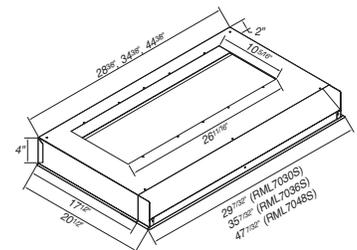


874358 09/09

SPECIFICATIONS

MODEL	RMP1 SERIES
VOLTS	120 VAC
Hz	60
AMPS	3.1
CFM	400*
BLOWER	INTERNAL
DUCTING SIZE	6" ROUND
2 SHIELDED HALOGEN BULBS	120 V, 50 W GU10 BASE
WARRANTY	1 YEAR


*OPTIONAL ARP6 AIR FLOW REDUCER
(LIMITS THE AIRFLOW OF THE HOOD UNDER 300 CFM).

DIMENSIONS

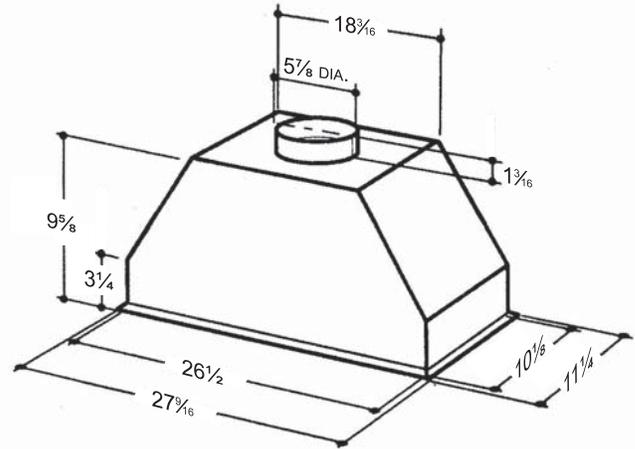

NOTE: DIMENSIONS SHOWN ARE IN INCHES.

AIR FLOW PERFORMANCE

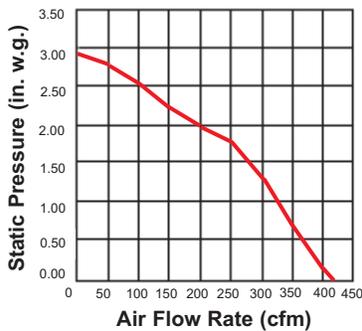

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. (2.54 mm) static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.



BROAN-NU-TONE CANADA INC., MISSISSAUGA, ONTARIO WWW.BROAN.CA 1-888-882-7626

PROJECT	REMARKS
LOCATION	
MODEL No.	
QTY.	
SUBMITTED BY	
DATE	