

SPECIFICATION SHEET

629004 RANGE HOOD



A graceful combination of hand-blown glass and stainless steel.

FEATURES

- Professional style design
- Stainless steel construction
- Wall mounted
- Seamless corners for easy cleaning
- Glass shroud
- Telescopic flue fits 8 ft. to 10 ft. ceilings
- 6" round duct connector/backdraft damper
- 450 cfm centrifugal blower
- Infinite speed, electronic touch control
- Timed auto-shut off allows blower to run 10 or 20 minutes, then shuts off
- Halogen lighting (2 x 20 W, Type MR16)
- Stylish stainless steel grease filter is dishwasher safe
- Available width: 35-7/16" (90 cm)
- · Special control indicates when it is time to clean the filter
- Heat Sentry[™]- automatically turns blower to high speed when excess cooking heat is detected

OPTIONS


• Replacement grease filter available

SPECIFICATIONS

VOLTS	AMPS	CFM	SONES	DUCT
120	3.1	450	8.5	6" round







Mount range hood so bottom of hood is 24" minimum above cooking surface.




HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.


Broan-NuTone LLC, 926 West State Street, Hartford, WI 53027 (1-800-637-1453)
NuTone, Inc., 4820 Red Bank Road, Cincinnati, OH 45227 (1-800-543-8687)
Broan-NuTone Canada, Inc., 1140 Tristar Drive, Mississauga, Ontario, L5T 1H9 (1-888-882-7626)

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date

30J 99042703D

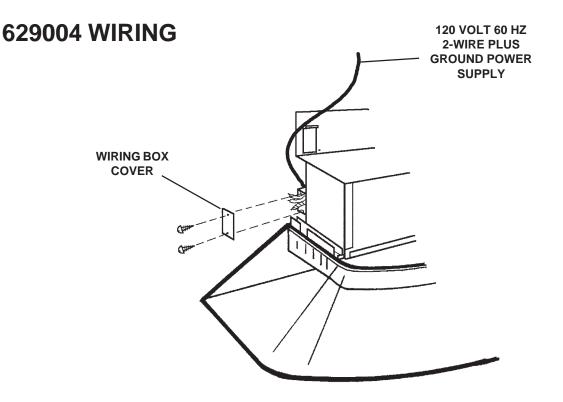

629004 MOUNTING

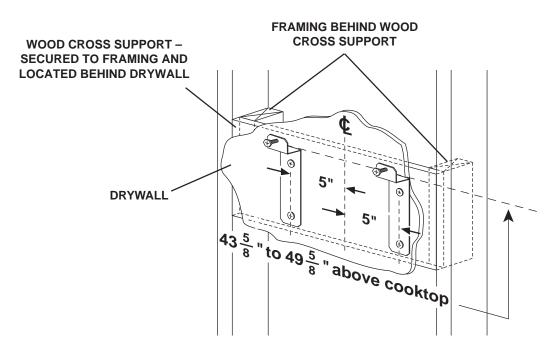

43-5/8" = bottom of hood 24" above cooktop 49-5/8" = bottom of hood 30" above cooktop

RANGEMASTER® by Broan-NuTone