

48-INCH GAS RANGETOP

DTT48M976 | MODERNIST COLLECTION



AVAILABLE MODELS

DTT48M976LS	48" Rangetop, Stainless Steel, Natural Gas
DTT48M976PS	48" Rangetop, Stainless Steel, Liquid Propane
DTT48M976HS	48" Rangetop, Stainless Steel, Natural Gas/High Altitude
DTT48M976AS	48" Rangetop, Stainless Steel, Liquid Propane/ High Altitude
DTT48M976LM	48" Rangetop, Graphite Stainless Steel, Natural Gas
DTT48M976PM	48" Rangetop, Graphite Stainless Steel, Liquid Propane
DTT48M976HM	48" Rangetop, Graphite Stainless Steel, Natural Gas/High Altitude
DTT48M976AM	48" Rangetop, Graphite Stainless Steel, Liquid Propane/High Altitude

FEATURES & BENEFITS

- → 6 Dual-Stack Sealed Burners + Electric Griddle.
- \rightarrow Powerful 22K BTU and true simmer burners.
- \rightarrow Continuous grates.
- → Illumina[™] Knobs and Ambient Light.
- ightarrow Includes brass and black burner caps.
- $\rightarrow~$ Available in graphite stainless steel and silver stainless steel finish.

ACCESSORIES (INCLUDED)

WOK RING


BRASS BURNER CAPS


BLACK BURNER CAPS


BEAGR BORRER GATO	
BURNER PERFORMANCE	
TOTAL NUMBER OF COOKTOP BURNERS	6 (BRASS)
LEFT FRONT (BTU)	18,000 DUAL (SIMMER)
LEFT REAR (BTU)	16,000 STACK DUAL (SIMMER)
CENTER FRONT (BTU)	22,000 DUAL (SIMMER)
CENTER REAR (BTU)	9,000 STACK DUAL (SIMMER)
RIGHT FRONT (BTU)	16,000 STACK DUAL (SIMMER)
RIGHT REAR (BTU)	16,000 STACK DUAL (SIMMER)
SEALED BURNERS	YES
GRIDDLE PERFORMANCE	
ELECTRIC	1,400W
CONTROL FEATURES	
LED KNOB BACKLIGHTING	YES
LED AMBIENT LIGHTING	YES
LED CONTROL BUTTON	YES
WI FI CONNECT LED	YES
WI FI CONNECT BUTTON	YES
BLUETOOTH CONNECT LED	YES
BLUETOOTH CONNECT BUTTON	YES
ADDITIONAL FEATURES	
RE-IGNITION	YES
OIL PAN	YES
INSTALLATION	
GAS TYPE	NATURAL GAS/ LIQUID PROPANE
HIGH ALTITUDE AVAILABLE	YES
POWER CORD	YES
TECHNICAL DETAILS	
CIRCUIT BREAKER (A)	15
VOLTS (V)	120
FREQUENCY (HZ)	60
ENERGY SOURCE	GAS AND ELECTRIC
DIMENSIONS & WEIGHT	
APPLIANCE DIMENSIONS (H X W X D) (IN.)	8" X 48" X 27 1/2"
REQUIRED CUTOUT SIZE (H X W X D) (IN.)	7 3/4" X 48" X 24"
WARRANTY	·
LIMITED, PARTS AND LABOR	2 YEARS


48-INCH GAS RANGETOP

APPLIANCE DIMENSIONS




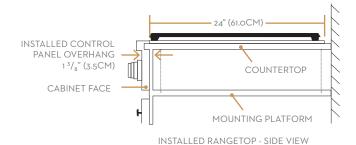






48"		
A - CUTOUT WIDTH	48" (121.9CM)	
B - HOLE OFFSET	20 13/16" (52.9CM)	
C - DOWNDRAFT VENT CUTOUT	43 1/2" (110.5CM)	
APPROVED DOWNDRAFT VENT MODELS	MRV48	




CABINET/COUNTERTOP CUTOUT DMENSIONS WITH DOWNDRAFT VENT - SIDE VIEW

CABINET/COUNTERTOP DIMENSIONS

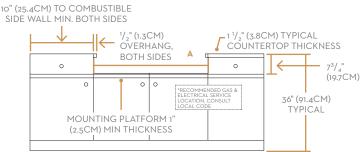

CABINET / COUNTERTOP DIMENSIONS - FRONT VIEW

*NOTE: PRODUCT TOLERANCE +/- 1/16" (+/- 1.6MM)-0 UNLESS OTHERWISE NOTED

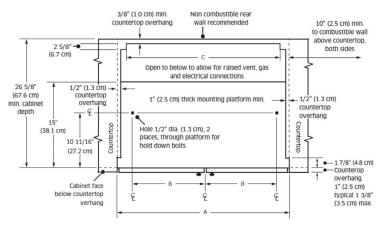


CABINET/COUNTERTOP CUTOUT DMENSIONS WITH DOWNDRAFT VENT - TOP VIEW.

NOTE: Gas and electrical connections may only be routed through the bottom of the rangetop when installed with a downdraft vent.



48"

CABINET/COUNTERTOP CUTOUT DIMENSIONS

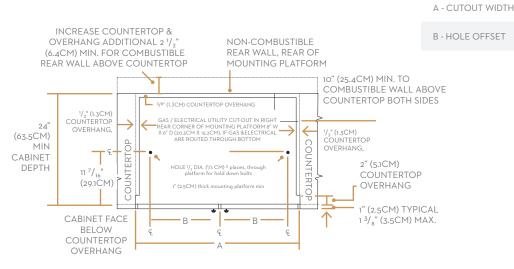

CABINET/COUNTERTOP CUTOUT DMENSIONS WITHOUT DOWNDRAFT VENT - TOP VIEW

CLEARANCE DIMENSIONS 13" (33.0MM) MAX3 В NOTE 2 30" (762MM) MIN CUTOUT FOR UTILITY ACCESS 18" (457MM)MIN TOP OF FINISHED COUNTER GRATE LEVEL

48" A - CUTOUT WIDTH 48" (121.9CM) 48" (121.9CM)* MINIMUM В 54" (137.2CM)** RECOMMENDED

NOTE: All vertical clearances must be maintained for a minimum of 18" (457mm) above the cooking surface.

48" (121.9CM)

20 13/16" (52.9CM)