


# Induction Cooktops

EW30IC60L S, EW30IC60L B





#### **Boil Water in 90 Seconds\***

Inspired by professional performance & power, the induction cooktop boils water in 90 seconds!



## **Professional Temperature Control**

Cooking with induction is more responsive than gas or electric — you can instantly adjust the heat to a delicate simmer or bring it to a quick boil.



#### **Adapts to Different Pot & Pan Sizes**

The induction cooktop adapts to different pot & pan sizes to provide perfectly consistent heat for delicious results.



#### **Cooktop Stays Cooler**


With induction cooking, heat is generated directly in the cookware, so the cooktop stays cooler to the touch — making it easier to clean.

Features	
Perfect Set® Electronic Touch Controls	Yes
Ceramic Smoothtop Glass Surface	Yes
10" Induction Cooking Element – 2600W / 3900W	1
8" Induction Cooking Element – 2300W / 3200W	1
7" Induction Cooking Element – 1900W / 2600W	1
6" Induction Cooking Element – 1450W / 2000W	1
Keep Warm Setting	Yes
Hot Surface Indicator Lights	Yes
Sealed Spill Control Cooktop	Yes
Sabbath Mode (Star-K® Certified)	
Accessories	
Granite Countertop Installation Kit – PN # 903061-9010	Optional
Specifications	
Colour –	
Stainless Steel	S
Black	В
Product Dimensions –	
Width	30-3/4"
Depth	21-1/2"
Height (Extreme Bottom to Underside of Cooktop)	4-3/8"
Power Supply Connection Location	Right Centre Rea
Connected Load (kW Rating) @ 240 / 208 Volts	8.4 / 7.3
Amps @ 240 / 208 Volts	35.0 / 35.1
Minimum Circuit Required (Amps)	40
Electrical – Single phase 4-wire cable, 120 / 240 Volts or 120 / 208 Volts, 60 Hz, fused on both sides of line with ground.	Required
Armoured Electrical Cable	Included
Approved for Single Oven Combination Installation**	Yes
The state of the s	

<sup>\*10&</sup>quot; induction burner with Power Boost, 6 qt./10" diameter pot, 1 qt. tepid water.

<sup>\*\*</sup>Approved to be used over any Electrolux Single Wall Oven.



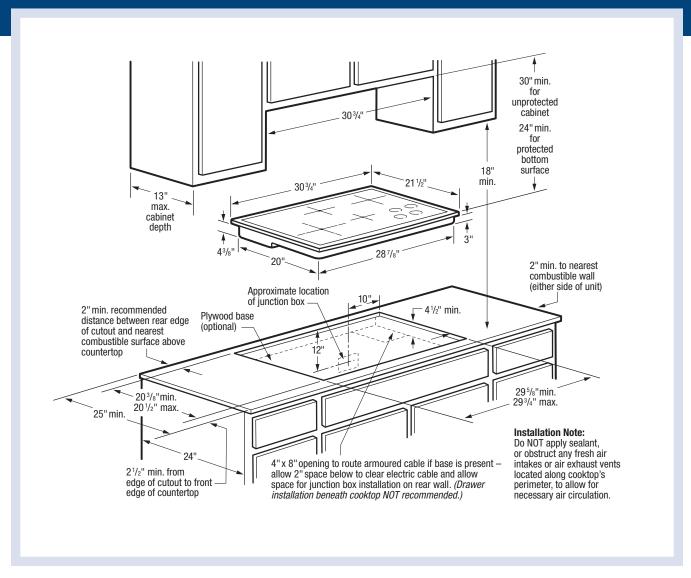

### 30" Induction Cooktop Specifications

- Product Weight 45 Lbs.
- Single phase 3- or 4-wire cable, 120 /240 or 120/208 Volt, 60 Hertz, fused on both sides of line with ground.
- Connected Load (kW Rating) @ 240/208 Volts = 8.4 /7.3kW
- Amps @ 240/208 Volts = 35.0 /35.1 Amps
- Recommended Circuit Breaker 40 Amps
- · Always consult local and national electric codes.
- Allow 2" space beneath cooktop or optional platform to clear electrical cable and allow space for installation of junction box on wall at back of cooktop. Position center of junction box 10" inward from right side of cooktop cutout, and 12" down from underside of countertop.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Allow 30" minimum clearance between top of cooktop and bottom of unprotected wood or metal overhead cabinetry.
- · Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than 30-3/4".
- Allow 24" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/8" flame-retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

- Allow 2" minimum clearance between rear edge of cutout and nearest combustible surface above countertop.
- Allow 2" minimum clearance from edge of cooktop to nearest combustible wall on either side of unit.
- Do NOT apply sealant, or obstruct any fresh air intakes or air exhaust vents located along cooktop's perimeter, to allow for necessary air circulation.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.
- Induction Cooktop model EW30IC60L is approved to be used over any Electrolux Electric Single Wall Oven. (Refer to Electric Cooktop Installation Over 30"/ 27" Electric Single Wall Oven Specifications page on web.)

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxappliances.com for detailed instructions.

#### **Optional Accessories**

• Granite Countertop Installation Kit - (PN # 903061-9010).



