



TIMELESS GOOD LOOKS

The new Inca Lux is equipped with a LED light bar and Faber's exclusive Sound Pro technology, making it more discreet than before..

AVAILABLE MODELS

Model #	FUN #	Size / Color	Motor Class (CFM)
INLX21SSV2	305.0679.264	21" Stainless Steel	295/395/600 CFM
INLX28SSV2	305.0679.263	28" Stainless Steel	295/395/600 CFM
INLX35SSV2	305.0679.262	35" Stainless Steel	295/395/600 CFM



THE INCA LUX NESTLES INTO ANY KITCHEN DESIGN WITH **TIMELESS GOOD LOOKS** AND FLUSH MOUNTED FEATURE. THE INCA LUX IS EASY TO INSTALL WITH THE EASY SNAP INSTALLATION PANEL ATTACHED.






MODEL	FUN #	SIZE/MATERIAL	MOTOR CLASS
INLX21SSV2	305.0679.264	21" Stainless Steel	295/395/600 CFM
INLX28SSV2	305.0679.263	28" Stainless Steel	295/395/600 CFM
INLX35SSV2	305.0679.262	35" Stainless Steel	295/395/600 CFM

FEATURES		PERFORMANCE		ACCESSORIES
Dimensions		Motor		LINE30ST 30" SS Liner (16 - 17 7/8" D) - Use with INLX28
UPDATED: Cabinet Cut Out 21"/ 28"	19 1/2" / 26 7/16" W x 10 7/16" D	No. of Fan Speeds	4	LINE36ST 36" SS Liner (16 - 17 7/8" D) - Use with INLX28
Cabinet Cut Out 35"	32 7/8" W x 10 7/16" D	Motor Class	295/395/600	LINE36PT 36" SS Liner (16 - 17 7/8" D) - Use with INLX35
Height Inside Cabinet	12 3/4"	Variable Air Management	Ability to set to 295, 395, 600 CFM	FILTER1 Charcoal Filter Kit
Ducting		Sound Pro	Yes	FILTER1LL2 Long Lasting Charcoal Filter
Type	Ducted/ Recirculating with FILTER1/FILTER1LL2	Perimeter Aspiration	Yes	REMORIG Wireless Remote Control
Duct Size	Top 6" Round	Display		WIREBOX3 Fixed Wiring Box
Lighting		Controls	Electronic With White LED	MUDAMPER6 6" Make-up Air Kit
Type	LED Bar	Intensive Speed	10 Minutes	MUDAMPER8 8" Make-up Air Kit
# of Bulbs	One - 4 Watt - 1 Level	Delay Shut-off	15 Minutes	LINSPT301228 30" Self Supporting Liner (17 1/2" - 20 1/2" D)
Grease Filters		Other		LINSPT361228 36" Self Supporting Liner (17 1/2" - 20 1/2" D)
Filter Type	Mesh	ADA Compliant	With Remote Control	
Dishwasher Safe	Yes	Remote Control	Purchase Separately	
Easy Snap Clip Installation		Power Cord Included	Yes	

DIMENSIONAL DRAWINGS

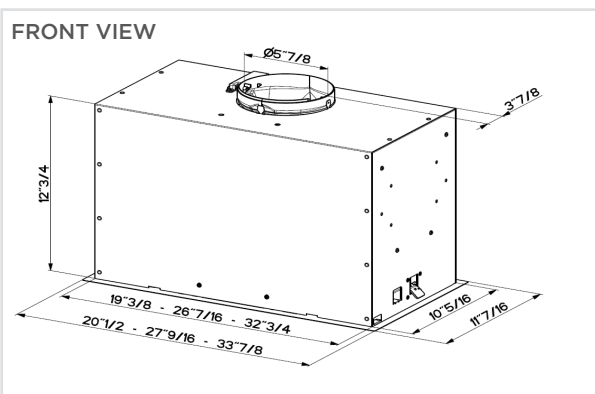


Rev4 123

800 Aviation Parkway, Smyrna, TN 37167 (508) 358-5353 | www.faberonline.com


LINER SPECIFICATIONS

Liners are stainless steel kits that are optional for cabinet insert hoods. They create a metal perimeter to “line” the wood below the range hood with metal. They create a more finished look and move the range hood up creating additional capture area. In some cases, a liner may be required by local code if the cabinet starts at below 30” off the stove (check local building codes). All liners are adjustable in depth with a telescoping frame.

LINE30ST - USE WITH INLX28ONLY FOR 30” WIDE CABINETS

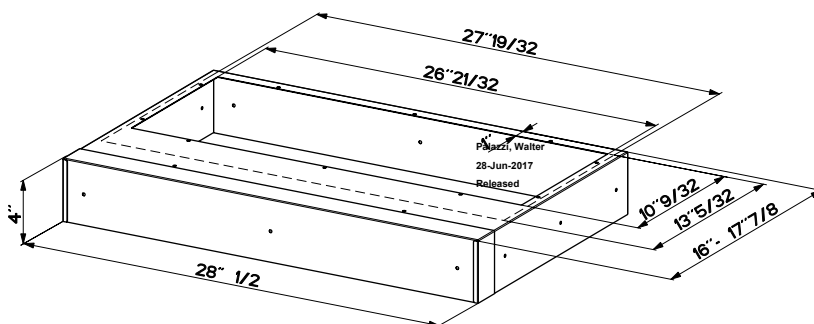


LINE36ST - USE WITH INLX28ONLY FOR 36” WIDE CABINETS

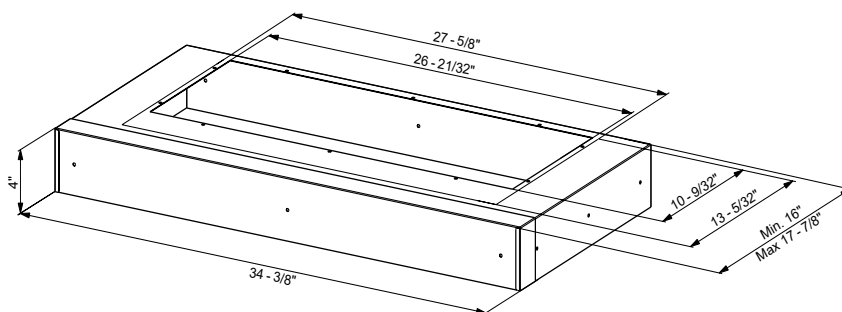

LINSPT301228 / LINSPT361228 SELF SUPPORTING LINER USE WITH INLX28ONLY

The liner is installed with screws against the walls of the cabinet, aligned with the cabinet bottom. The hood is installed onto the thick metal interior portion of the liner and is fully supported by the liner.

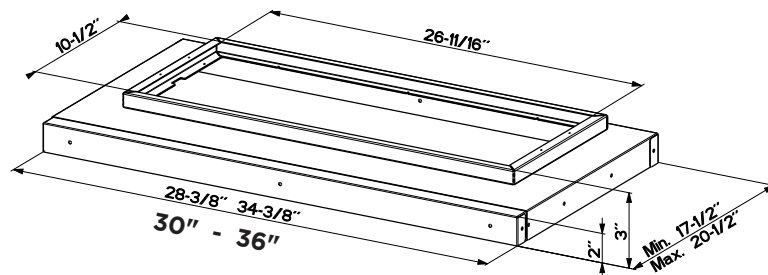

Rev1 123