LG STUDIO

LSHD3089BD / LSHD3689BD LSHD3080ST/ LSHD3680ST 30"/36" Wall Mount Range Hood

Fingerprint & Smudge Resistant Available in 30" & 36" Widths 5" Low-Profile Body 22 1/16" Depth Accomodates Ceilings up to 9'6" 5-Speed IR Touch Controls Dual Level LED Lighting Decorative Mesh Filters (2) wi-fi Capabilities RoHS Compliant







MOUNTING HEIGHT	
Distance Over Cooking Surface	26"- 34"
30" DIMENSIONS/WEIGHT	
Product Dimensions (WxHxD)	29 15/16" x 27" to 48 1/2" x 22 1/16"
Carton Dimensions (WxHxD)	34 1/4" x 27 3/8" x 26 5/8"
Weight (Product/Shipping)	35 / 52 lbs
36" DIMENSIONS/WEIGHT	
Product Dimensions (WxHxD)	35 7/16" x 27" to 48 1/2" x 22 1/16"
Carton Dimensions (WxHxD)	39 1/2" x 27 3/8" x 26 5/8"
Weight (Product/Shipping)	37 / 55 lbs
LIMITED WARRANTY	
Limited Warranty	2 years parts and labor
UPC CODES	
LSHD3089BD (30" Black Stainless Steel)	048231338981
LSHD3689BD (36" Black Stainless Steel)	048231338998
LSHD3080ST (30" Stainless Steel)	048231339841
LSHD3680ST (36" Stainless Steel)	048231339858

FEATURES	
Controls	IR Touch
Auto Delay-Off	Yes
Lighting	9W LED Light Strip
Dual-Level Lighting	Yes
Filters	Decorative Mesh (2) Dishwasher-Safe
wi-fi Capabilities	Yes (On/Off, Control CFM, Lights, Status)
RoHS Compliant	Yes
BLOWER	
Speed Levels	5
CFM (min-max)	200-600
Sones (min-max)	1-6
DUCTING	
Vertical Internal Blower	6" Round
MATERIALS/FINISHES	
Available Colors	Black Stainless Steel (BD)
Fingerprint & Smudge Resistant	Yes
POWER/RATINGS	
UL Listed	Yes
Ratings/Requirements/Type	120V, 4 Amps ,60Hz
Circuit Breaker Size	15 Amps

LG STUDIO

LSHD3089BD / LSHD3689BD LSHD3080ST/ LSHD3680ST 30"/36" Wall Mount Range Hood

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.


30" DIMENSIONS	
A Width	29 15/16"
B Height	48 1/2"
C Depth	22 1/16"
36" DIMENSIONS	
A Width	35 7/16"
B Height	48 1/2"
C Depth	22 1/16"
POWER RATINGS	
AC Power	120V, 4 Amps ,60Hz




CABINET LAYOUT

WARNING

- Observe all governing codes and ordinances during planning and installation. Contact your local building department for further information.
- Use only duct work deemed acceptable by state, municipal and local codes.

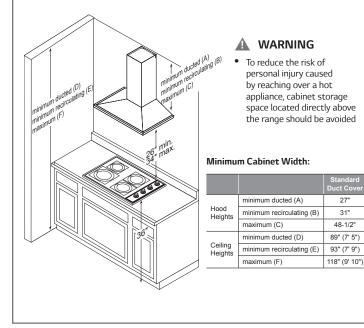

DIMENSIONS

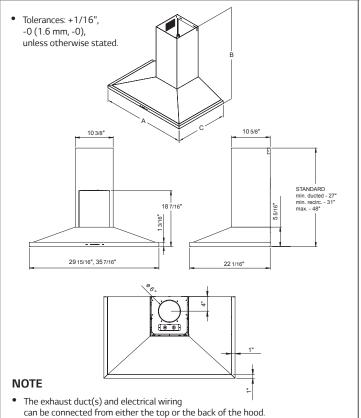

DUCTING OPTIONS

- A minimum of 6" round duct must be used to maintain maximum air flow efficiency.
- Always use rigid metal ducts only. Flexible ducts could restrict air flow by up to 50%.
- ALWAYS, when possible, reduce the number of transitions and turns. If long duct run is required, increase duct size from 6" to 7" or 8".
- If turns or transitions are required, install as far away from hood duct output and as far apart as possible.
- Minimum mount height between range top to hood bottom should be no less than 26".
- Maximum mount height should be no higher than 34".
- It is important to install the hood at the proper mounting height. Mounting the hood too low could result in heat damage and fire hazard. Mounting the hood too high will make it hard to reach and reduce its performance and efficiency.
- If available, also refer to the range manufacturer's height clearance requirements and recommended hood mounting height above range.

MARNING Fire Hazard

- NEVER exhaust air or terminate duct work into spaces between walls, crawl spaces, ceiling, attics or garages.
- All exhaust must be ducted to the outside.
- Use metal ductwork only
- Fasten all connections with sheet metal screws and tape all joints with certified Silver Tape or Duct Tape.



1

© 2018 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice. 7/17/18