NSE6DG8100SRAC

6.3 cu. ft. Electric Slide-in Range with Wi-Fi and Voice Control



Signature Features

3.0 kW Electric Cooktop

Cook fast and evenly using the powerful heat of the 3.0 kW Electric Cooktop for convenient meals that taste delicious. This 5-burner cooktop includes 2 dual ring burners so you can cook with multiple sized pots and pans.

Precision Knobs

Precisely control and ensure proper activation of your cooktop with integrated knob buttons that must be pinched in before the knobs can be pushed and turned.

Self and Steam Clean

Self Clean deeply cleans your oven with high heat that breaks down grease and food residue. Steam Clean lightly cleans in 20 minute.

BESPOKE Design

This oven features a stylish and contemporary Bespoke design that will enhance the look of your kitchen or add an elegant colour accent. The range's recessed handle design seamlessly blends into your kitchen for a minimalist look.

Available Colour



Stainless Steel



Fingerprint Resistant



Wi-Fi Connectivity and Voice Control

Features

- Intelligent User Experience
- Thermal
- Bread Proof 95°F (35°C)
- Wi-Fi Connectivity
- Voice Control
- Bespoke Design
- Fingerprint Resistant Finish
- Large Oven Capacity: 6.3 cu. ft.

- SmartThings
- 3.0 kW Electric Cooktop
- Self and Steam Clean
- Storage Drawer
- Recessed Handle
- Ready2Fit[™] Guarantee

Convenience

- Smart Control
- Smart Install
- Sabbath Mode




NSE6DG8100SRAC

6.3 cu. ft. Electric Slide-in Range with Wi-Fi and Voice Control

Installation Specifications

IMPORTANT: To eliminate the risk of burns or fire caused by reaching over heated surface units, avoid having cabinet storage space located above the surface units. If you have cabinet storage space over the heating elements, you can reduce the risk by installing a range hood that projects horizontally a minimum of 5 inches beyond the bottom of the cabinets.


- * A minimum of 30" is required between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; a minimum of 24" is required if the bottom of the wood or metal cabinet is protected by not less than V_4 " of flame retardant millboard covered with not less than no.28 MSG of sheet steel, 0.015" of stainless steel, 0.024" of aluminum, or 0.020" of copper.
- ** A minimum of 15" is required between the countertop and the adjacent cabinet bottom.



SLIDE-IN CUTOUT

Dimensions

CAUTION: This range has been designed to comply with the maximum allowable wood cabinet temperatures of 194°F. Make sure the wall covering, countertops, and cabinets around the range can withstand the heat (up to 194 °F) generated by the range. If not, discolouration, delamination, or melting may occur.

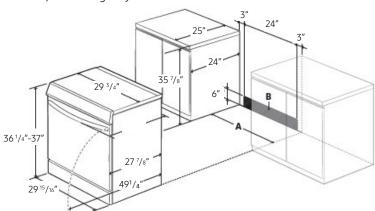

Power Source

240V/60Hz/40A

Radiant Ceramic Cooktop

Right Front: 6"/9" - 3000W Left Front: 6"/9" - 3000W Right Rear: 6" - 1200W Left Rear: 6" - 1200W

Center Rear: 6" Warm Zone (100W)

Oven: 6.3 cu. ft. Capacity

Bake Element: 3000W Broil Element: 4200W Bake: 175°F - 550°F

Storage Drawer

Capacity: 0.9 cu. ft.

Warranty

One (1) Year Parts and Labour

Product Dimensions & Weight (WxHxD)

Outside Net Dimensions: $29^{15}/_{16}$ " x $36^{1}/_{4}$ " - 37" x $27^{7}/_{8}$ "

Net Weight: 157.19 lb (71.3 kg)

Shipping Dimensions & Weight (WxHxD)

Dimensions: 33¹/₁₆" x 41¹/₈" x 30⁵/₁₆" Shipping Weight: 176.81 lb (80.2 kg)

Colour Model # UPC

Stainless Steel NSE6DG8100SRAC 887276821580