


# Thor Products Q & A

## 1. For Oven temperature:

We are using a Robertshaw Mechanical Thermostat, that requires 10 min preheat for every 100 degrees (roughly 30 mins for 350F degrees in temperature).

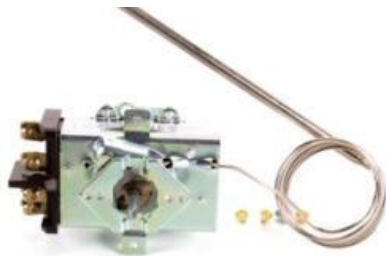

(Left: oven thermostat design, Right: LED light design on Thor Range)

## 2. For LED light:

The LED light is located above the knob

LED light above the burner knob will remain illuminated, till placed in the off position.

LED above oven knob (griddle/small oven) is a **Cycle Light**, meaning that whenever the oven is on, the LED light will be illuminated.

This is **NOT** a **Preheat light**.

## 3. For Obtaining the oven temperature:

Do not use a laser gun to obtain oven cavity temperatures. Or griddle surface temperatures.

## 4. For Small Oven:

18-inch Small Oven is a Roasting Oven, not a Baking Oven. There is no broiler in an 18-inch roasting oven.

## 5. Griddle / Small Oven:

We use the same thermostat for the griddle and the small 18' oven.

## 6. Oven Rack Size:

30" Oven Rack: 23" \* 15.8"

36" Oven Rack: 28.8" \* 15.8" (it won't fit for full-size sheet pan which is 26" \* 18")

18" Oven Rack: 12.6" \* 15.8"

**7. For Range Installation:**

Do not use Teflon tape on any regulator. Pipe Dope for NG/LP is the only proper method.